


## Packing List

- Display (1)
- Translucent Graphic (1)
- Protective Acrylic Insert (1)
- Power Cord Adapter (1)

## Insert Custom Graphic

1. Place frame facing up onto flat surface.
2. Unsnap frame by lightly pulling upwards on each of the 4 sides.
3. Remove protective acrylic insert and place to the side.
4. Place custom graphic into the frame. Replace protective acrylic insert and adjust position as needed.
5. Snap 2 shorter sides of frame closed, then the 2 longer sides.

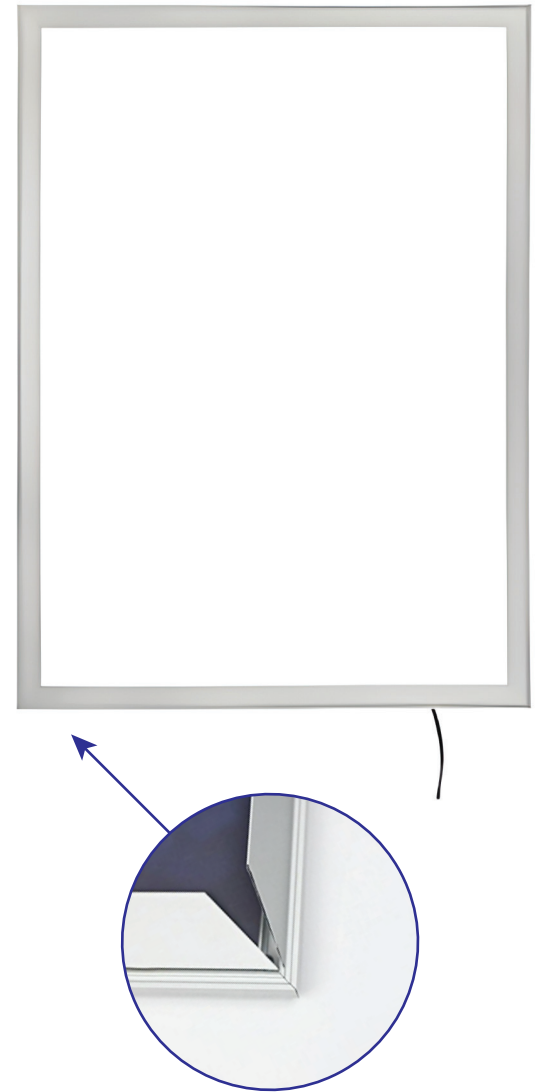

## Power On

1. Insert power cord adapter into input wire on back of frame.
2. Plug power cord into outlet. The unit turns on.
3. Unplug unit to turn off.