




1) Using a 2<sup>nd</sup> person, lift the rack to the desired location, level, and mark all mounting holes with a pencil. Set rack aside.

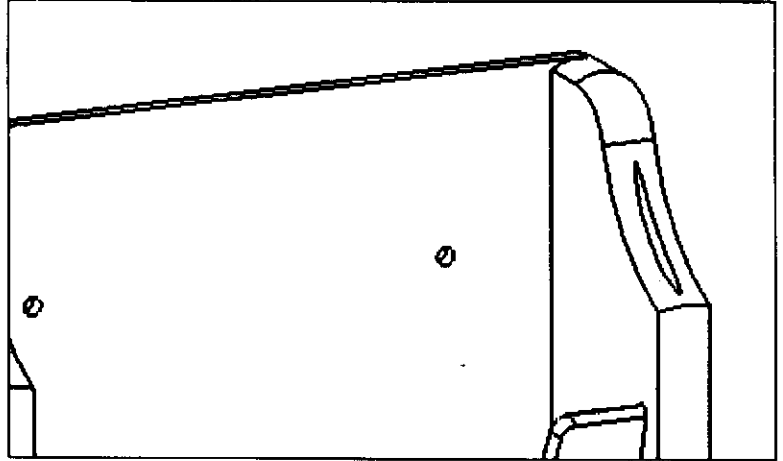


2) Using a power drill, drill a hole slightly larger than the barrel of the wall anchor.  
**PLEASE NOTE: WALL ANCHORS ARE MEANT FOR WALL SURFACES FROM 3/8" TO 5/8" THICK.**

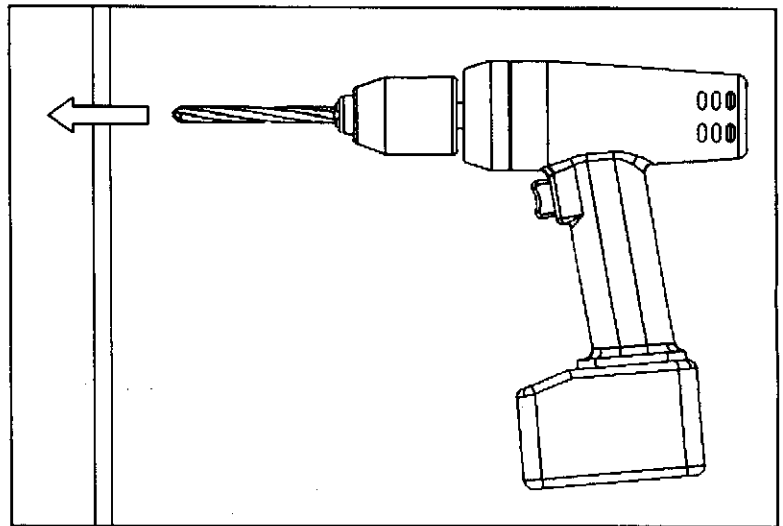


3) Insert the wall anchor into the wall and tap the head, using the butt end of a screwdriver or small hammer, until the gripper prongs are embedded into the surface of the wall.

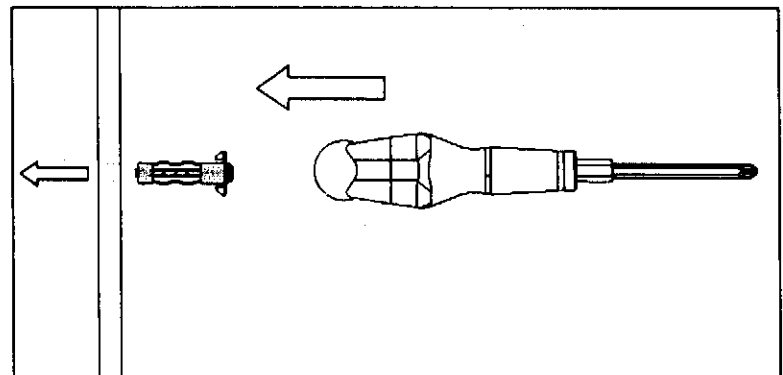


4-A) Press down firmly on the head of the screw with a screwdriver and turn the screw clockwise until the barrel crimps against the inside of the wall.

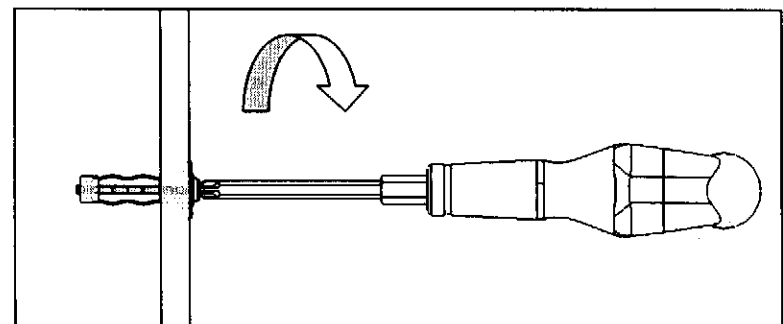

4-B) Press down firmly on the head of the screw with a screwdriver and turn the screw clockwise until the barrel crimps against the inside of the wall.

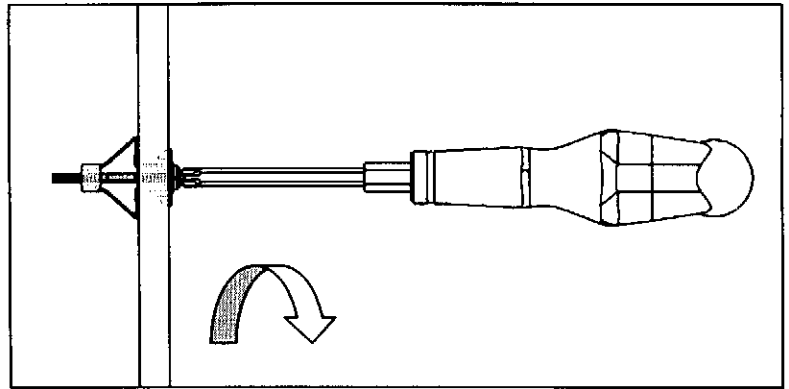

5) With the barrel pressing firmly against the inside of the wall, remove the screw by turning it counter-clockwise. If the wall anchor feels loose after removing the screw, re-insert the screw and tighten more.

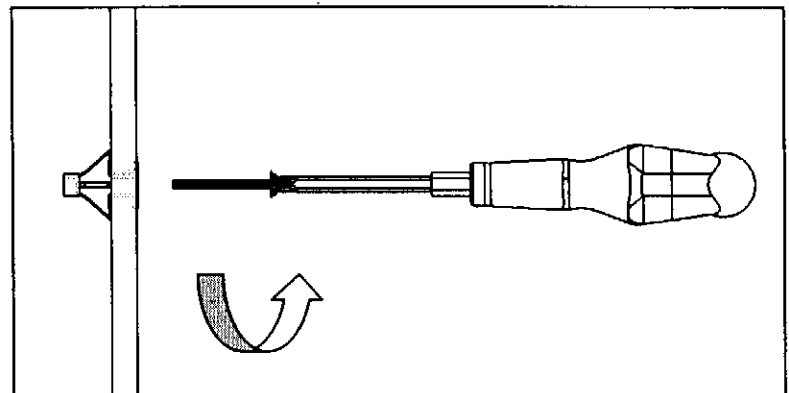

6) After the screws have been removed, line up the mounting holes on the rack with the wall anchors and re-insert the screws and tighten. (Be careful not to over tighten.)

