



TV Silver Floor Stand with Oval MDF Base, Fits Monitors 42 to 60"

Assembly Instructions

SKU: AVAPLG2


V2.0



Scan the QR
code to visit the
product page.



Components

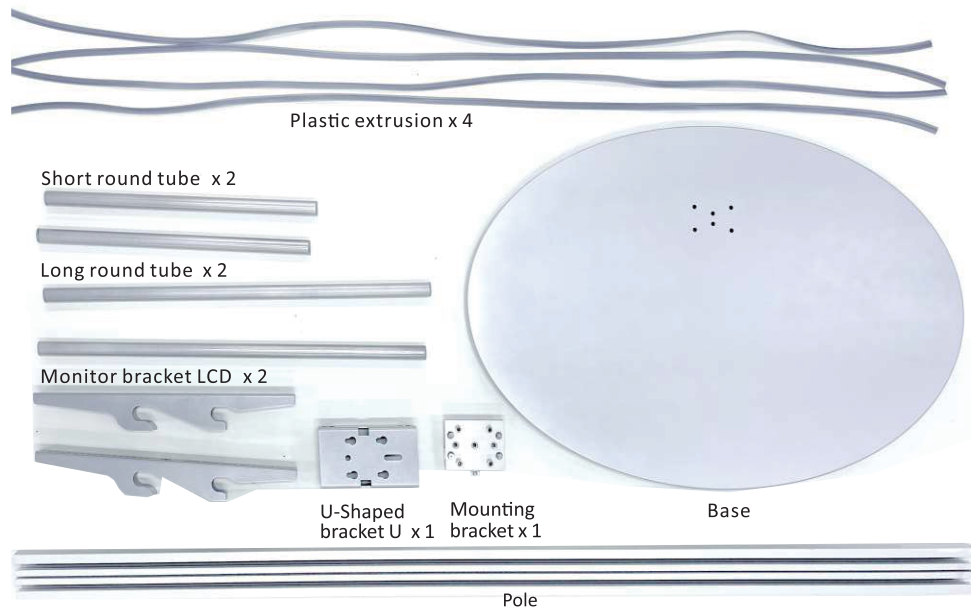

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.

Safety Information

 **CAUTION:** Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before assembly. If you have any questions regarding any of the instructions or warnings, please contact Displays2go.

- Heavy metal base can cause muscle strain or back injury! Two people required for assembling and moving unit.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.
- Do not use this product for anything other than the original design.
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product.

VESA Size: 200x200, 300x300, 400x400, 600x400, 400x600




CAUTION: DO NOT EXCEED MAXIMUM LISTED WEIGHT CAPACITY. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!




Assembly


1. Insert plastic sealers into slots of metal pole.

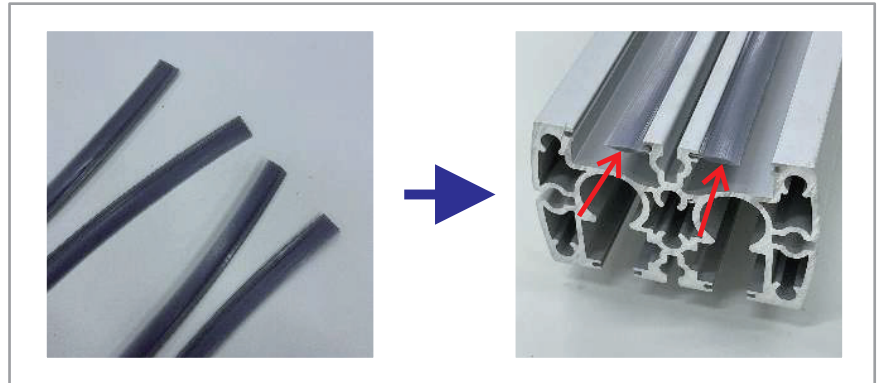

2. Unscrew all 6 screws at the bottom of pole and place to the side.

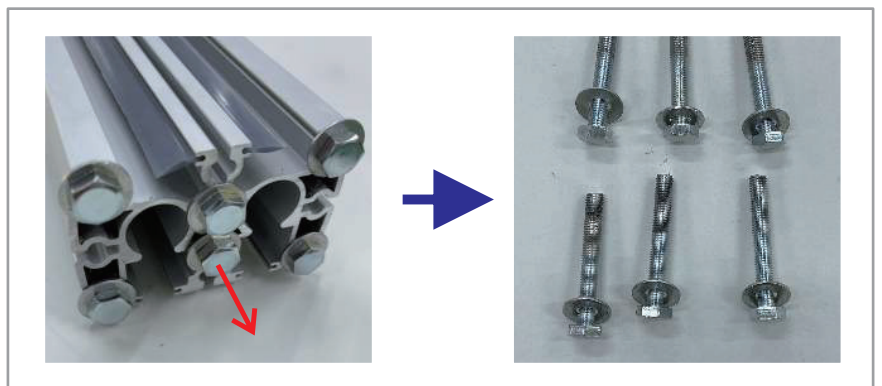


3. Using the 6 screws, screw upwards through base to attach pole to base.

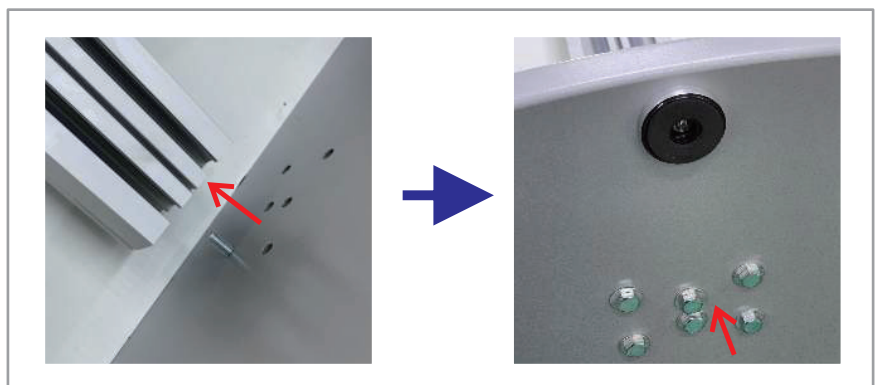


4. Slide mounting bracket through channels of pole to desired location of your TV. Tighten 4 inner screws until bracket is secure.

Remove L-shaped metal piece and place to the side.


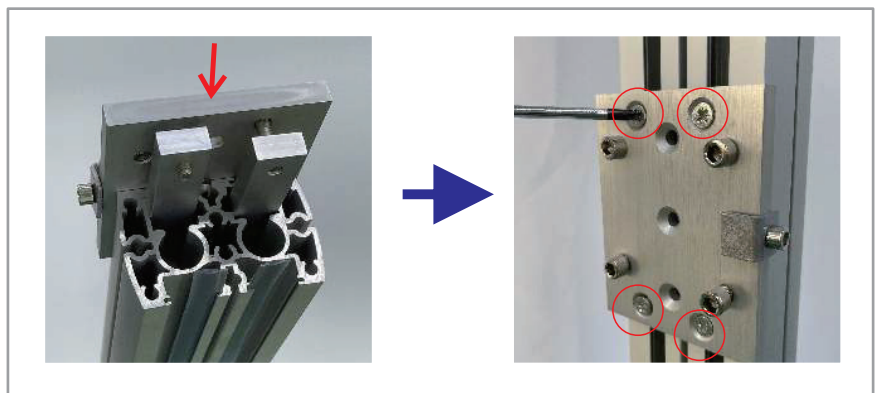


5. Attach U-shaped bracket to the outer 4 screws. Secure with hex wrench, tightening each screw equally.

Replace L-shaped metal piece in original position.

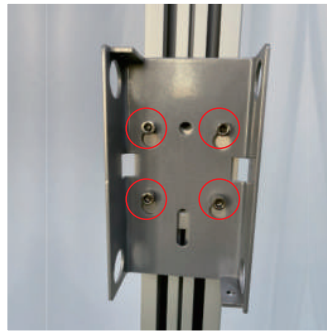


6. Select either long or short tubes depending to the width of your TV. Fasten with screws.

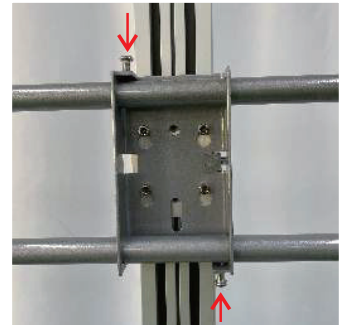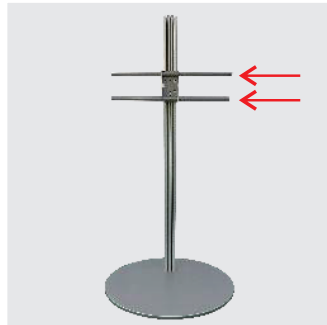


7. Fasten brackets to monitors with screws and plastic spacers as needed.

NOTE: Use the appropriate screws and plastic washers for your specific TV.

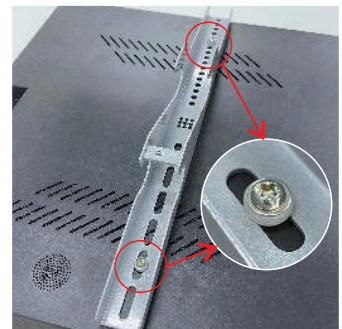

8. Attach brackets to round tubes and adjust distance as needed. Once position is final, screw brackets and tubes. Confirm all connections are secure.

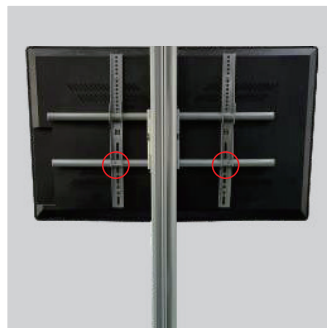

Assembly is complete.

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.