




DISPLAYS2GO


Cell Phone Charging Station with Custom Printed Graphics & Illuminated Side Panels

User Manual

SKU CHR17CP Floor-Standing Charging Station
SKU CHRW17 Wall-Mounted Charging Station
SKU CHR17GCP Replacement Graphics



Scan the QR
code to visit the
product page.

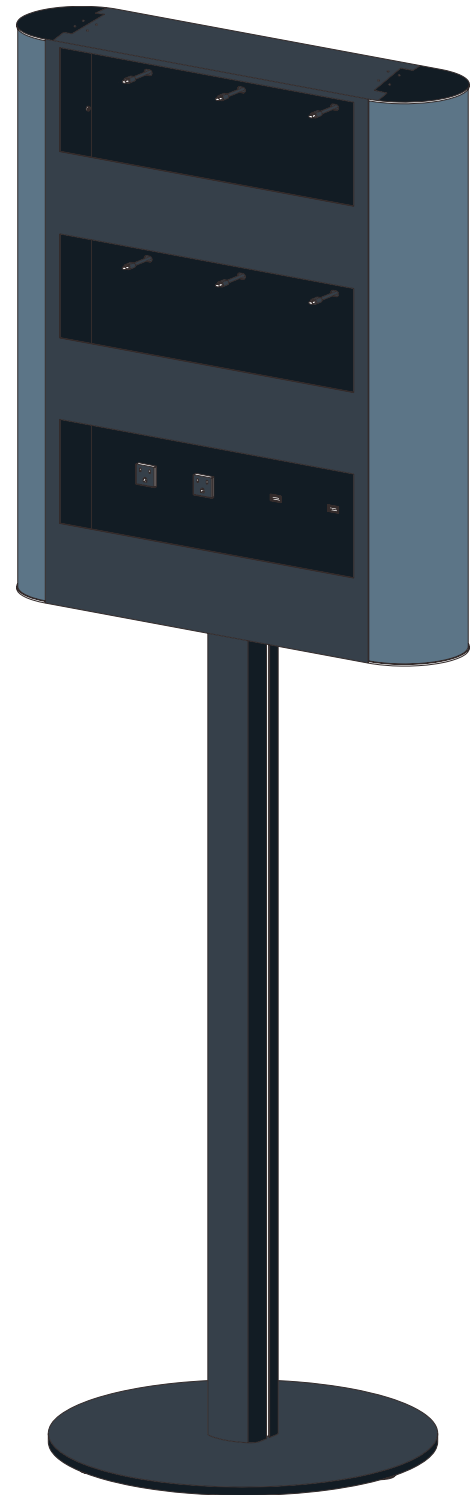

Components

PART QUANTITY

A: Charging Station	1
B: Power Cord	1
C: Custom Graphic	2

Floor-Standing (SKU CHRf17CP):

D: Hex Wrench	1
E: 17mm External Hex Wrench	1
F: Pole	1
G: Connector Plate	1
H: Base	1
I: M6x16 Screw	8
J: Base Cover	1
K: Base Weight	1
L: M6x30 Screw	4
M: M10x30 Screw	1
N: Washer	1
(Not Applicable) H-Shaped Bracket	1


Wall-Mounted (SKU CHRw17CP):

Needed: Bubble Leveler, Drill




O: Bracket A	1
P: Bracket B	1
Q: M6x16 Screw	5
R: M6x50 Wall Anchor	4
S: Mounting Hardware for Concrete Wall	1

Parts Description

Parts shown for both floor-standing and wall-mounted assembly.

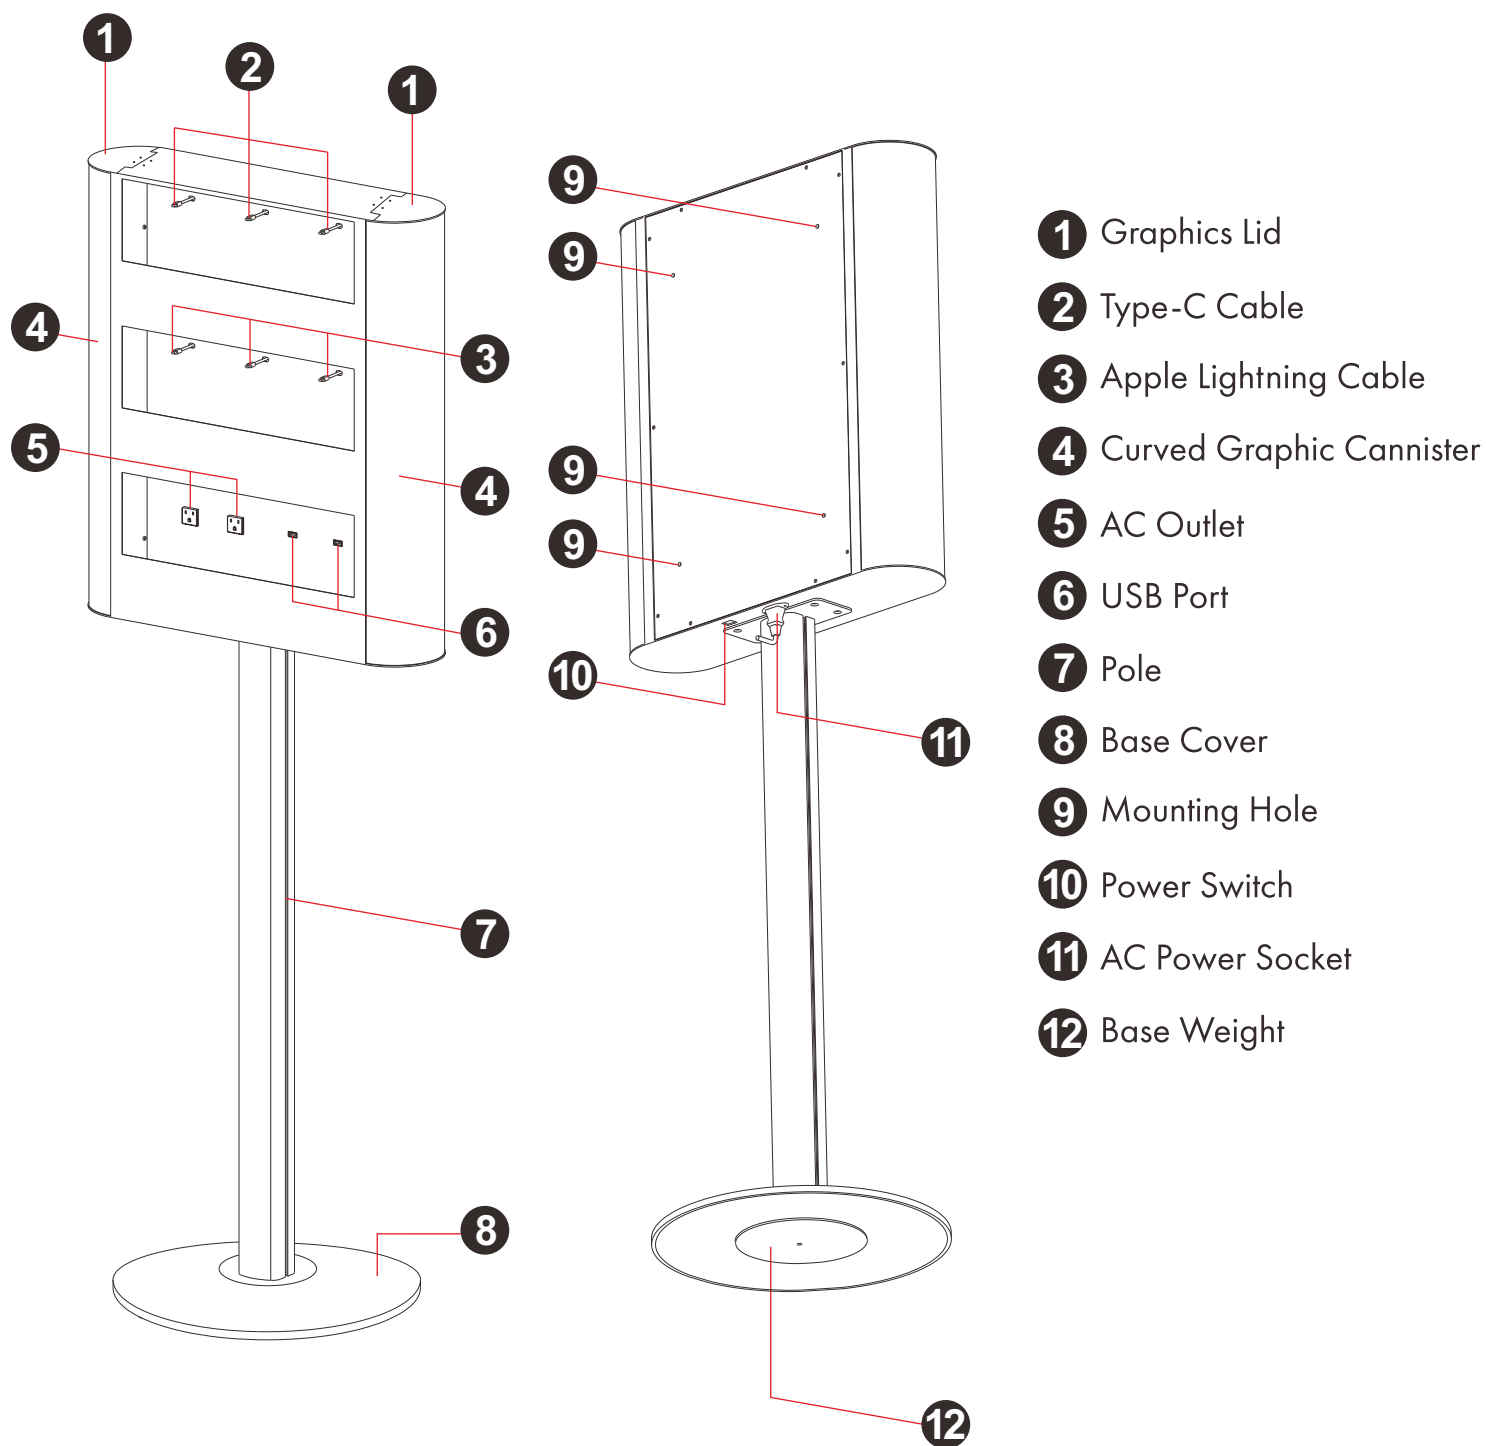

Assembly for Floor-Standing Charging Station

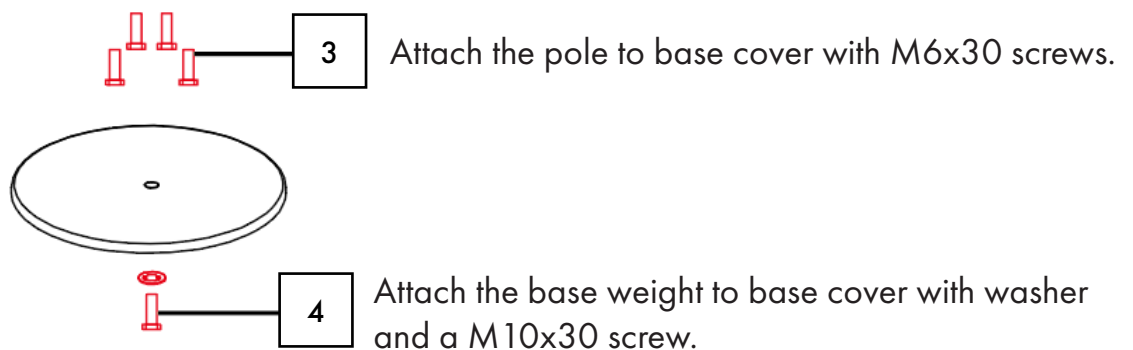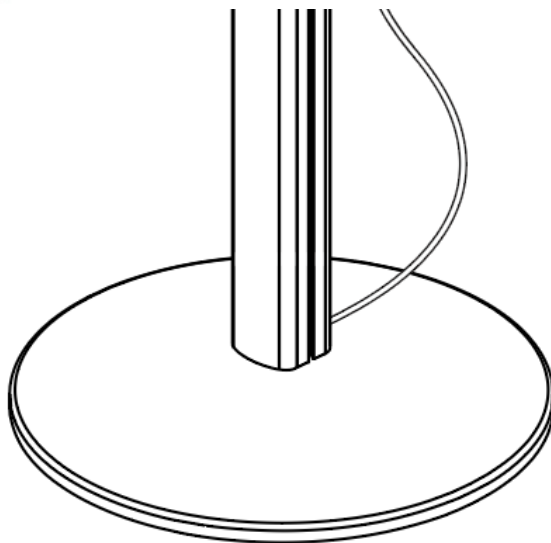
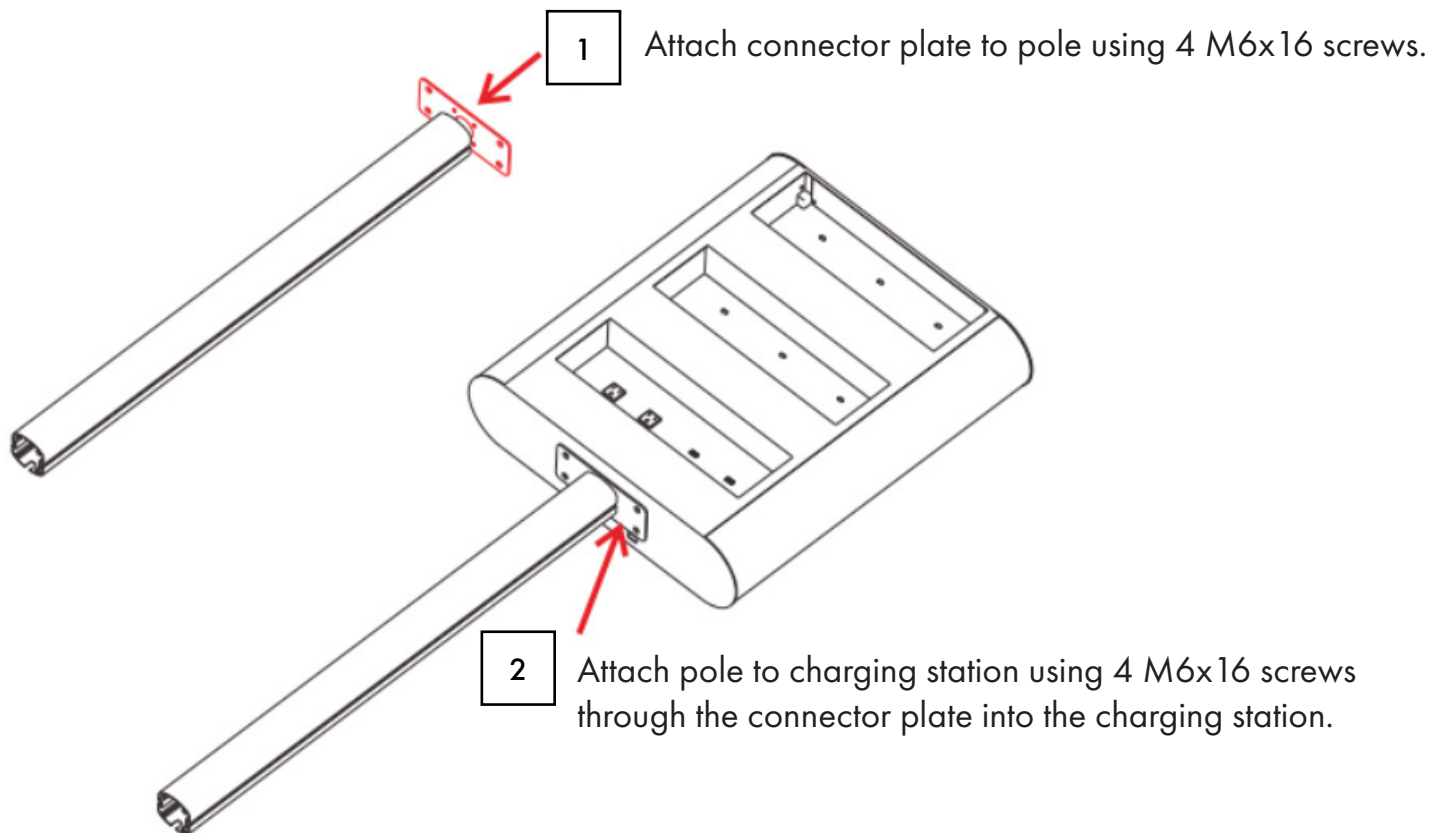


Assembly for Wall Mounted Charging Station



❗ **NOTE:** The included hardware is designed for installation in a concrete wall only. For other wall materials, use hardware intended for your specific wall material and ensure that it can support the weight of the unit (approximately 15 lbs).

1. Fix bracket A onto the back of the charging station using M6x16 screws.
2. Use the brackets as template and a bubble level to keep the bracket level. Secure bracket B onto the wall with enclosed M6x50 wall anchors.

❗ **NOTE:** The vertical center distance is 18.1" (460mm).

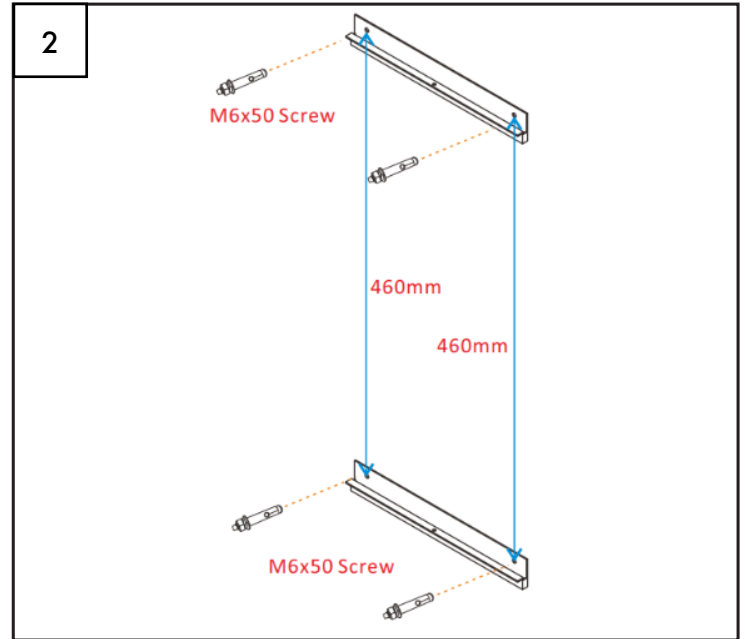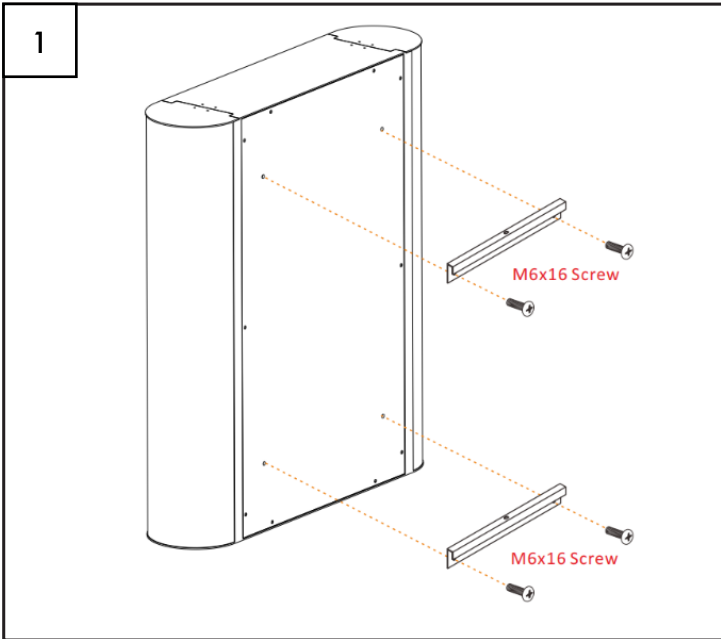


3. Carefully lift the charging station up and slowly lower it onto the brackets on the wall.
4. Align holes at the middle of the top brackets and fasten a M6x16 screw into the holes.

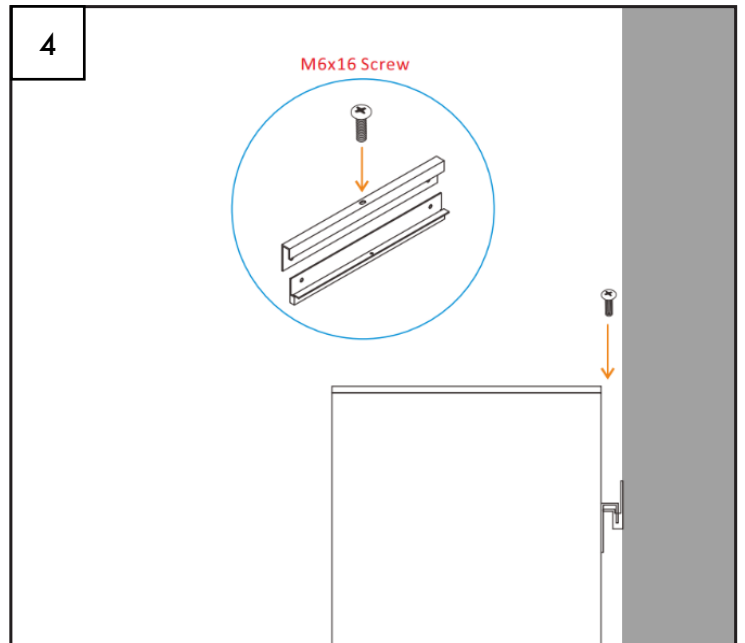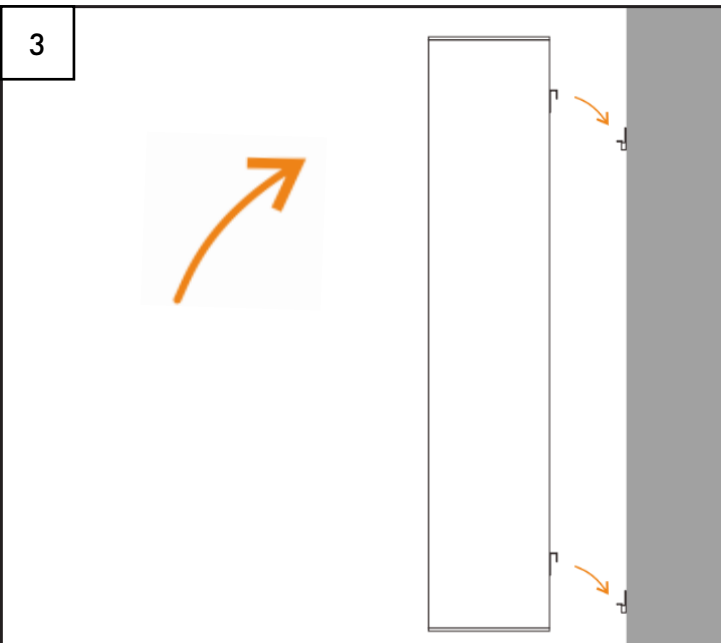

Custom Graphics Installation

1. Open the lid to the graphic cannister.
2. Take out the clear lens and white arc diffuser on both sides.
3. Place your graphic on the white arc diffuser.
4. Put the clear lens, graphic and white arc diffuser together closely, then insert them into graphic cannister.
5. Close the lid.

ⓘ **NOTE:** The graphic size is 9.5" x 26.5" (242 x 673mm).

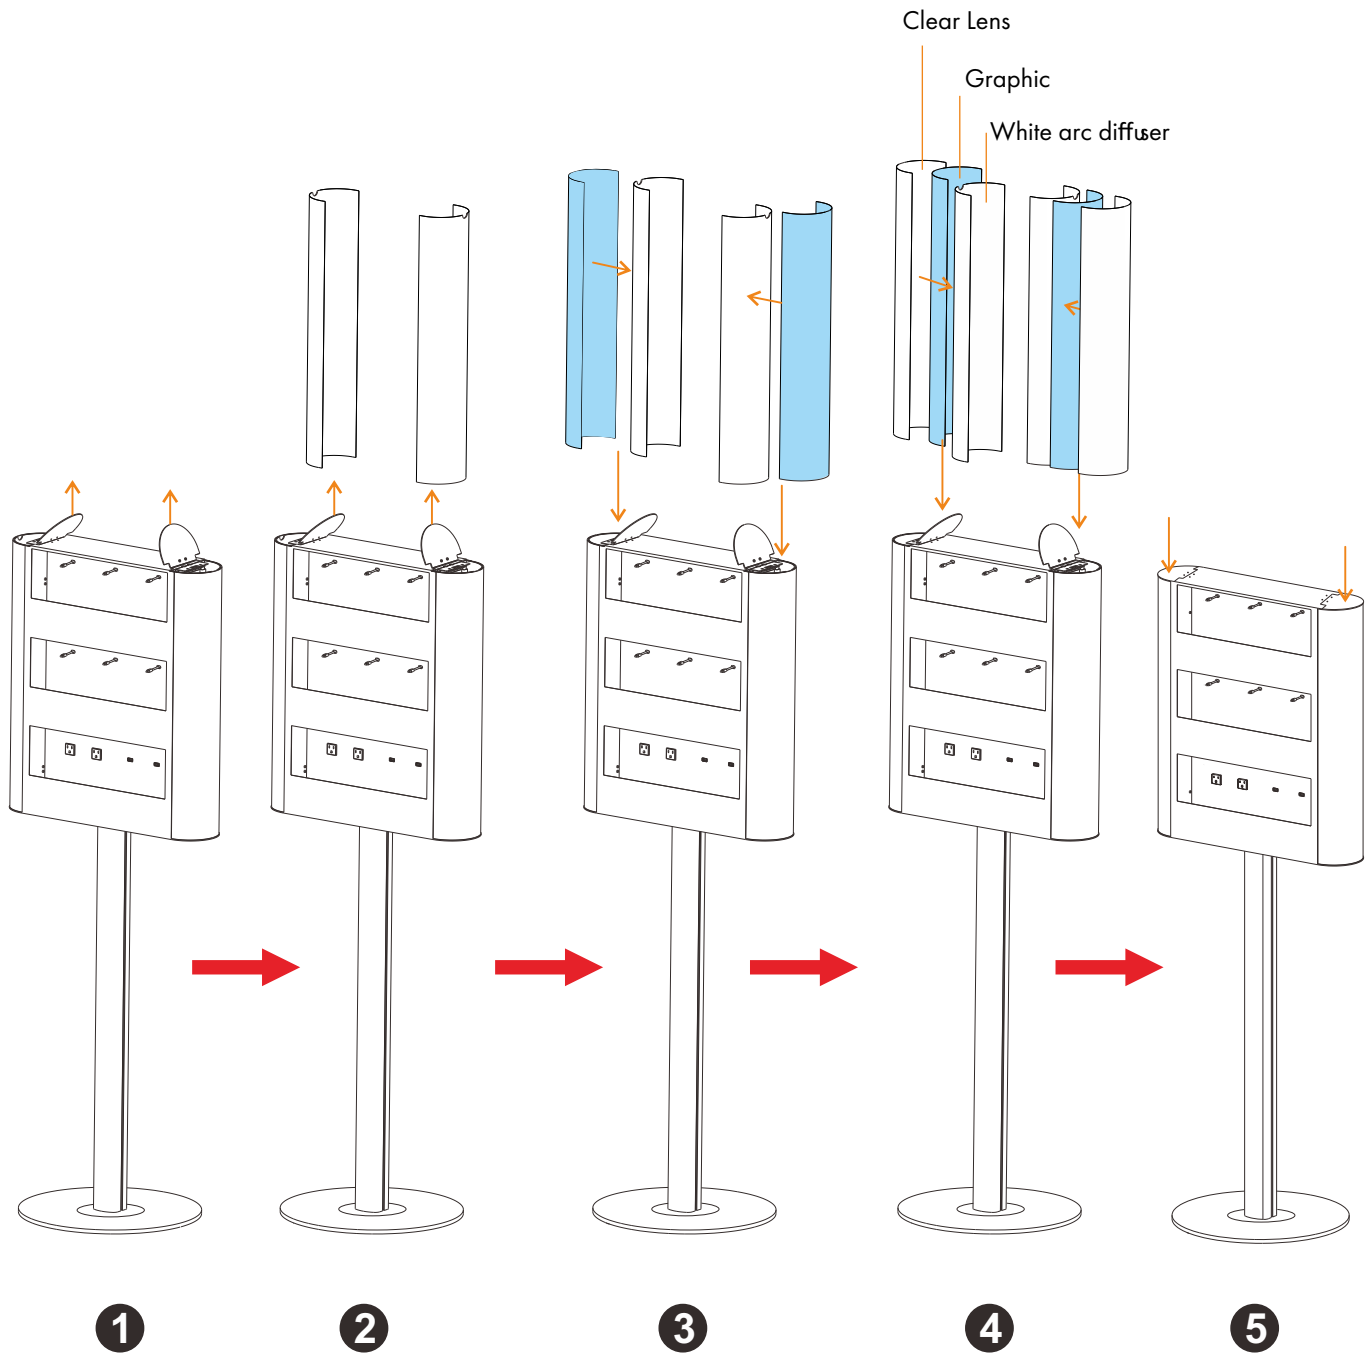

Charging Station Operation

Once assembled, plug in the AC power cord and flip the power switch to ON. The charging station illuminates and the charging cords are active.

Technical Specifications

Included Charging Ports


- USB x2
- USB Type-C x3
- Apple Lightning x3
- AC Outlet x2

Fast Charge Protocols

- Supports DCP (BC1.2, Apple, Samsung)
- Supports Qualcomm Quick Charge Protocol QC2.0 and QC3.0
- Supports Huawei Fast Charge Protocol FCP
- Supports Samsung Fast Charge Protocol AF

Integrated Charging Protection

- Short Circuit Protection
- Over Load Protection
- Over Voltage Protection
- Over Temperature Protection

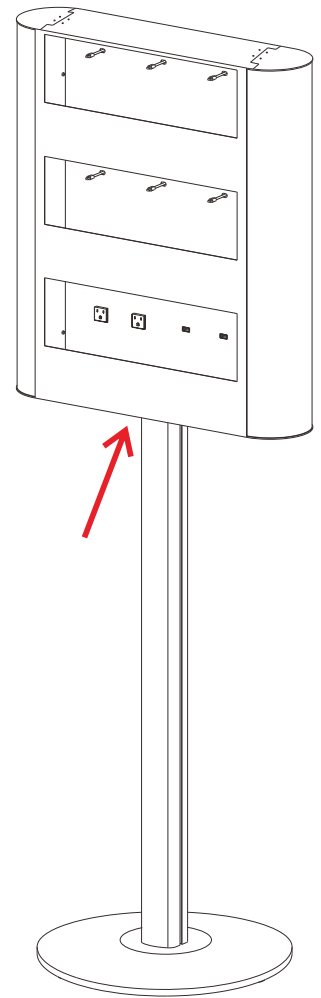

Assembly is complete.

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.