




TV Silver Floor Stand with Oval MDF Base, Fits Monitors 42 to 60"

Assembly Instructions

SKU: AVTLTST2


V2.0




Scan the QR code to visit the product page.



Oval Base Assembly

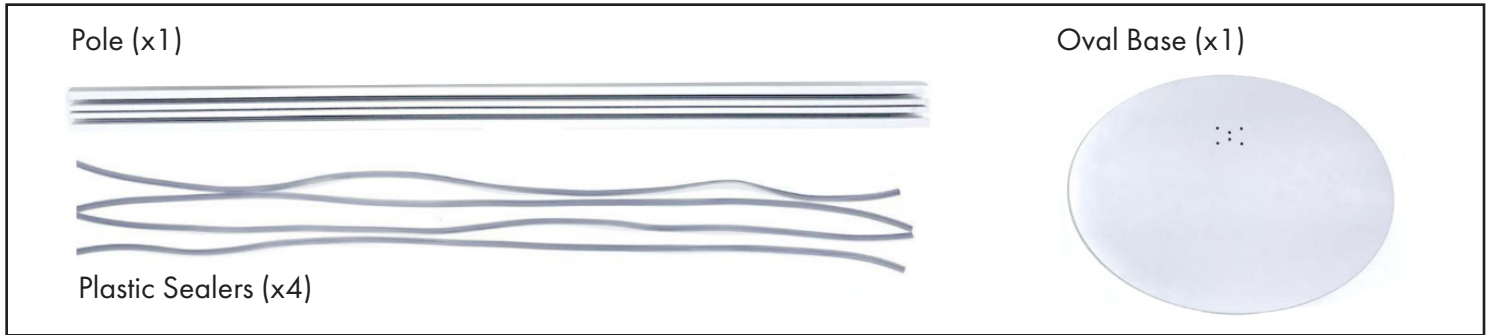

1. Insert plastic sealers into the channels of the pole.



2. Unscrew all 6 screws at the bottom of the pole. Set aside the screws and washers.




3. Insert the screws and washers through the base into the pole.



Tilting Bracket Installation Instructions

Tilt Mount Bracket Installation


- While looking at the front of the unit, slide the long threaded rod of the Tilt Mount Bracket (A) down the left channel of the pole. Making sure the threaded rod guide is oriented with the screw heads facing the front of the unit.
- Align the head of the Tilt Mount Bracket (A) so the two cylinders slide into the pole as pictured.
- Fasten the plate of the Tilt Mount Bracket (A) to top of the pole using the included M14 Phillips Head Screws as pictured.
- Tighten the bottom screw of threaded rod guide securing the rod in place.
- Continue with monitor installation using your VESA mounting plate. (packed separately)

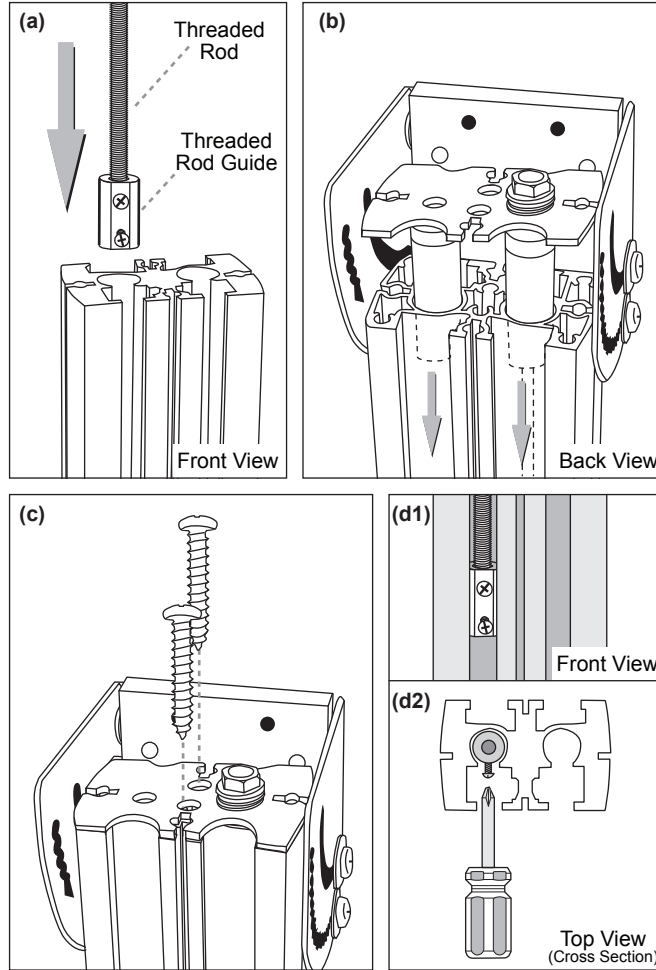

**Please note: the included tools are used when mounting the VESA monitor bracket - shipped separately.


Tilt Mount Bracket Angle Adjustment

- From the serrated slot (bottom slot), completely remove the screw and washers on each side of the Tilt Mount Bracket.
- From the smooth upper slot on each side of the Tilt Mount Bracket loosen the screws so the head can tilt freely.
- Position the Tilt Mount Bracket at the desired angle.
- Replace the screws and washers then tighten, locking the tilt mount bracket at your desired angle.

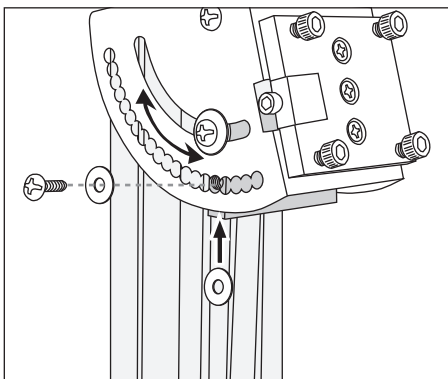


Tilt Mount Bracket Height Adjustment


- To adjust the height of the Tilt Mount Bracket, the Tilt Mount Bracket must be removed from the pole.
- To raise or lower the height of the Tilt Mount Bracket rotate the threaded rod. Turn the threaded rod counter-clockwise to raise the height of the Tilt Mount Bracket and rotate it clockwise to lower it.
- Once desired height is reached, install Tilt Mount Bracket as shown above.

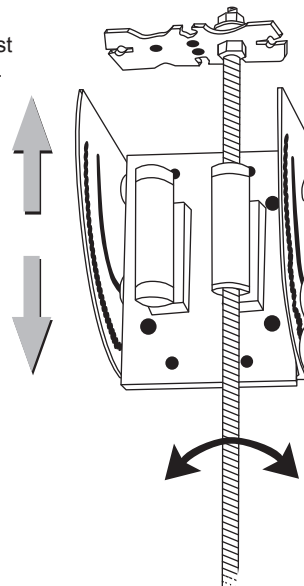

Bracket Parts



Included Tools




Hardware



Floor Stand Bracket Assembly Instructions


Step 1: Bracket

- a. Position the Bracket (A) at desired height on wall.
(Hardware NOT included)




Step 2: Mounting Mid Bracket

- a. Remove the side clamp located on the left of the Bracket (A), then loosen the (4) 6mm hex bolts enough to allow the keyholes in the Mid Bracket (B) to slide over the bolts.
- b. Align the keyholes and slide the Mid Bracket (B) over and down the hex bolts. Once the Mid Bracket (B) is in position, tighten down all 4 bolts using the 6mm allenkey provided.
- c. Return the Side Clamp to its original position making sure the folded side overlaps the Mid Bracket (B). Tighten clamp locking the Mid Bracket (B) in place.

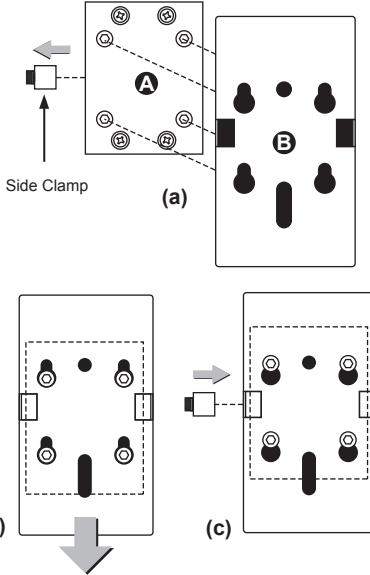


Step 3: Installing Hangers onto monitor


- a. Using provided hardware*, screw hangers (D) into mounting holes on back of display. If display allows, hangers may be installed so that the screen is in either landscape or portrait orientation. Various combinations of spacers/screws may need to be used depending on the monitors configuration.
- b. Make sure that the corresponding holes on each hanger are used when mounting the monitor to keep the screen level.

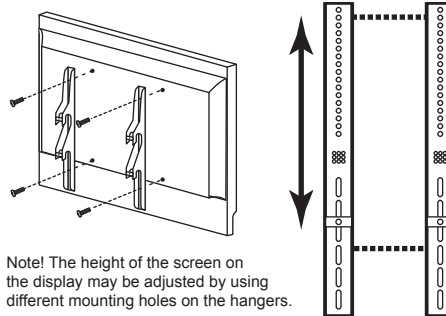


Bracket Parts

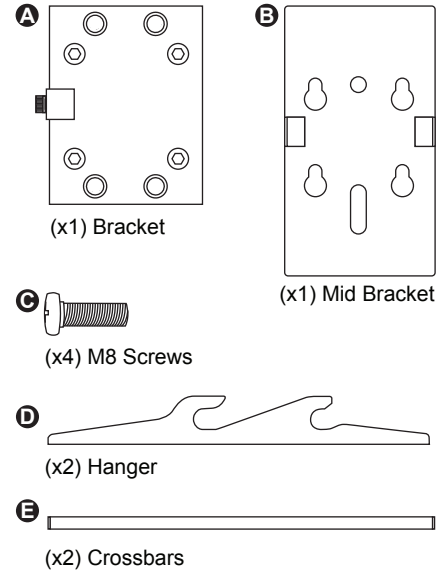

Included Tools




Monitor Mounting Hardware

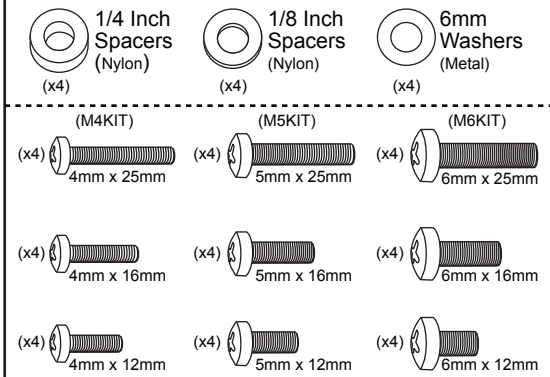

*The monitor mounting hardware that is included with this unit is designed to work with most standard monitors. Additional hardware may be purchased at your local hardware supplier.

Step 4: Secure Crossbars & Mount Monitor

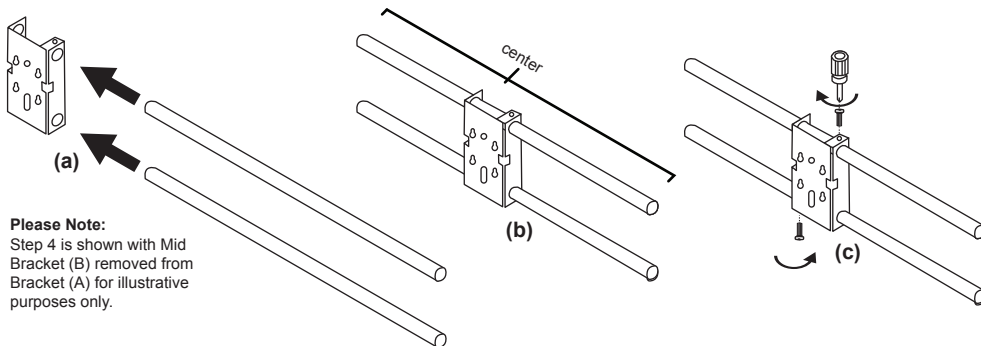


Please Note:
Step 4 is shown with Mid Bracket (B) removed from Bracket (A) for illustrative purposes only.

- a. Insert Crossbars (E) into Mid Bracket (B).

- b. Center Crossbars (E) in Mid Bracket (B).

- c. Secure tightly using supplied M8 Screws (C).

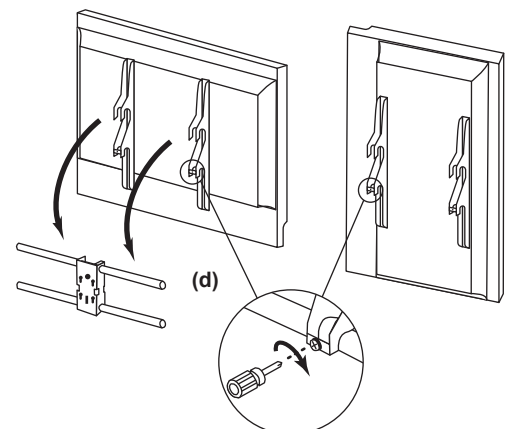

- d. Hook Hangers (D) to Crossbars (E) on back of monitor. Check that the screen is centered, then insert and tighten 8M Screws (C) on Hangers (D) to secure the monitor to the Crossbars (E).