




DISPLAYS2GO

Cell Phone Charging Station with Custom Printed Graphics & Illuminated Side Panels

User Manual

SKU CHRF17CP Floor-Standing Charging Station
SKU CHRW17 Wall-Mounted Charging Station
SKU CHRF17GCP Replacement Graphics

Scan the QR code to visit the product page.



Components

PART

QUANTITY

A: Charging Station	1
B: Power Cord	1
C: Custom Graphic	2

Floor-Standing (SKU CHRf17CP):

D: Hex Wrench	1
E: 17mm External Hex Wrench	1
F: Pole	1
G: Connector Plate	1
H: Base	1
I: M6x16 Screw	8
J: Base Cover	1
K: Base Weight	1
L: M6x30 Screw	4
M: M10x30 Screw	1
N: Washer	1
(Not Applicable) H-Shaped Bracket	1



Wall-Mounted (SKU CHRw17CP):

Needed: Bubble Leveler, Drill

O: Bracket A	1
P: Bracket B	1
Q: M6x16 Screw	5
R: M6x50 Wall Anchor	4
S: Mounting Hardware for Concrete Wall	1




Parts Description

Parts shown for both floor-standing and wall-mounted assembly.

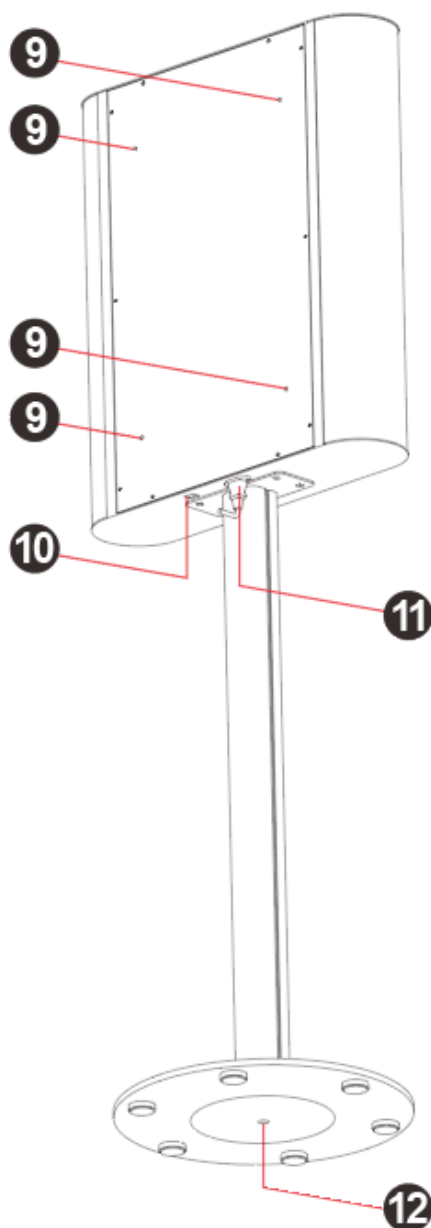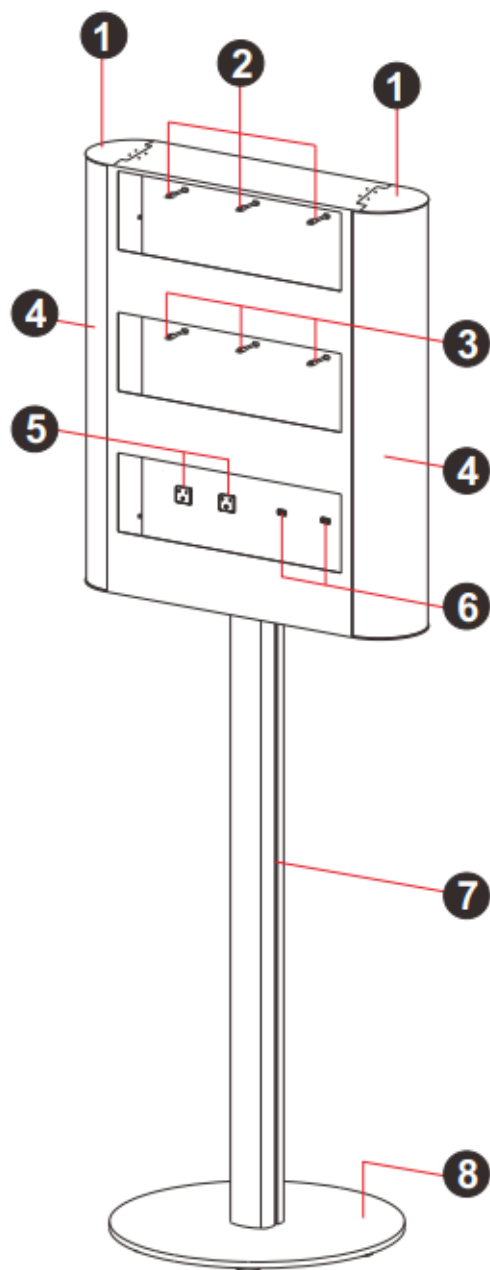

- 1** Graphics Lid
- 2** Type-C Cable
- 3** 8-Pin Charging Cable
- 4** Curved Graphic Cannister
- 5** AC Outlet
- 6** USB Port
- 7** Pole
- 8** Base Cover
- 9** Mounting Hole
- 10** Power Switch
- 11** AC Power Socket
- 12** Base Weight

Assembly for Floor-Standing Charging Station

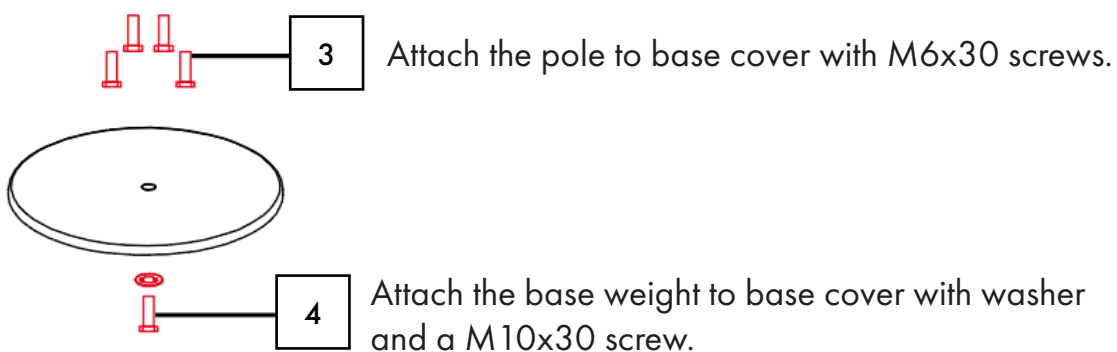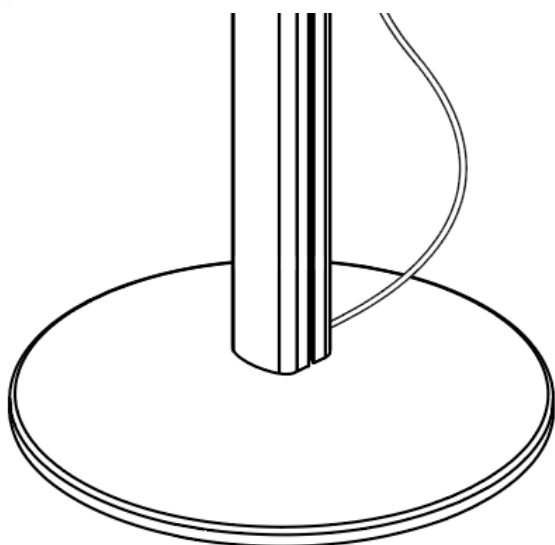
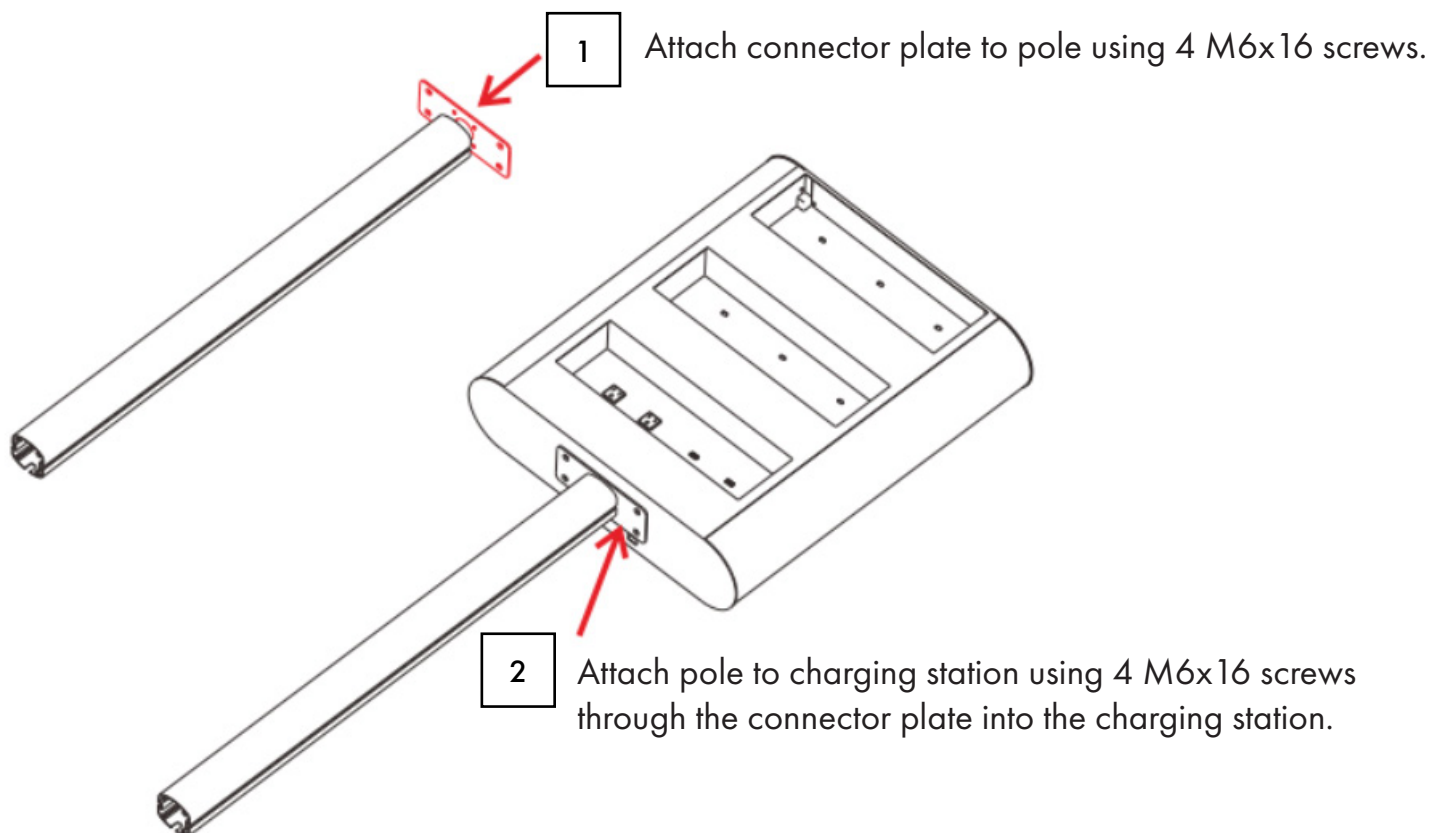


Assembly for Wall Mounted Charging Station



NOTE: The included hardware is designed for installation in a concrete wall only. For other wall materials, use hardware intended for your specific wall material and ensure that it can support the weight of the unit (approximately 15 lbs).

1. Fix bracket A onto the back of the charging station using M6x16 screws.
2. Use the brackets as template and a bubble level to keep the bracket level. Secure bracket B onto the wall with enclosed M6x50 wall anchors.

NOTE: The vertical center distance is 18.1" (460mm).

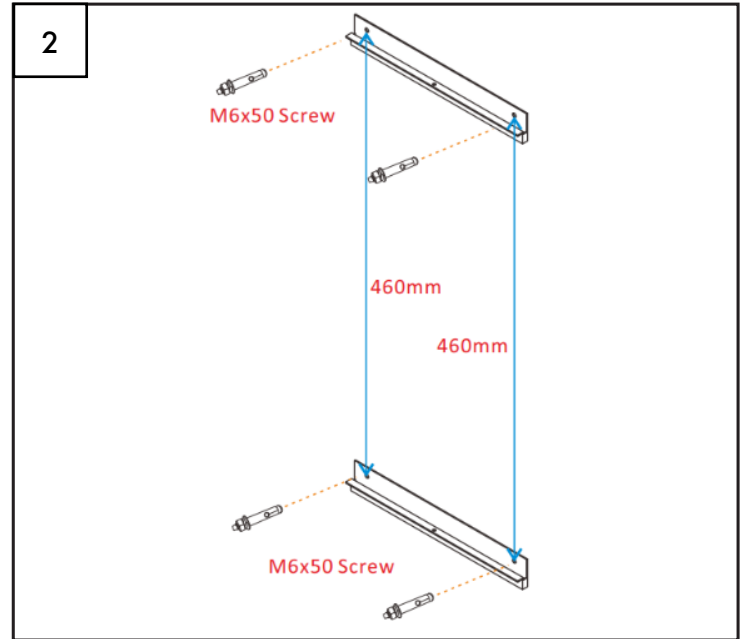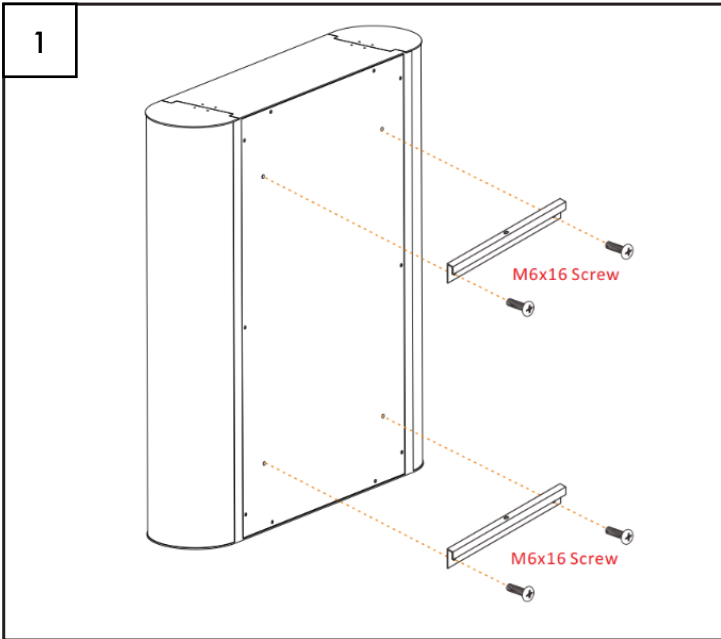


3. Carefully lift the charging station up and slowly lower it onto the brackets on the wall.
4. Align holes at the middle of the top brackets and fasten a M6x16 screw into the holes.

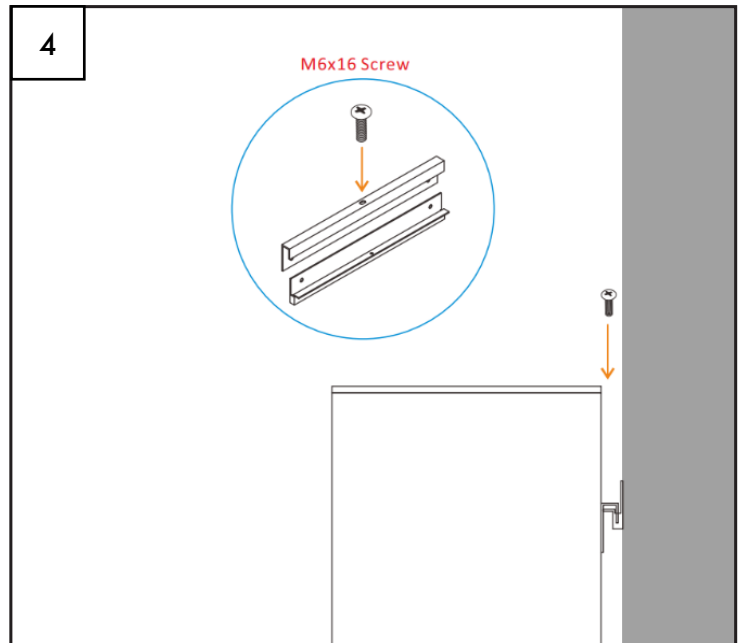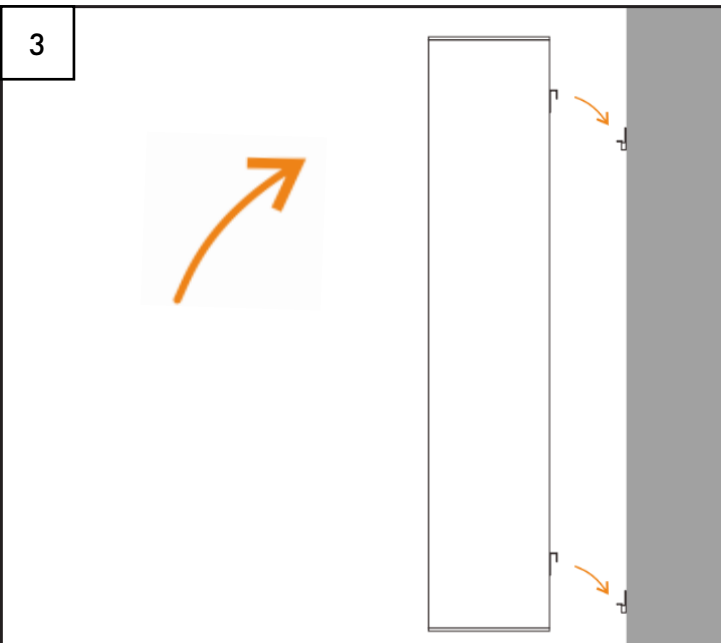

Custom Graphics Installation


1. Open the lid to the graphic cannister.
2. Take out the white arc diffuser on both sides.
3. Place your graphic on the white arc diffuser.
4. Insert the graphic and the white arc diffuser into graphic cannister.
5. Close the lid.

❗ **NOTE:** The graphic size is 9.7" x 26.5" (246x673mm).

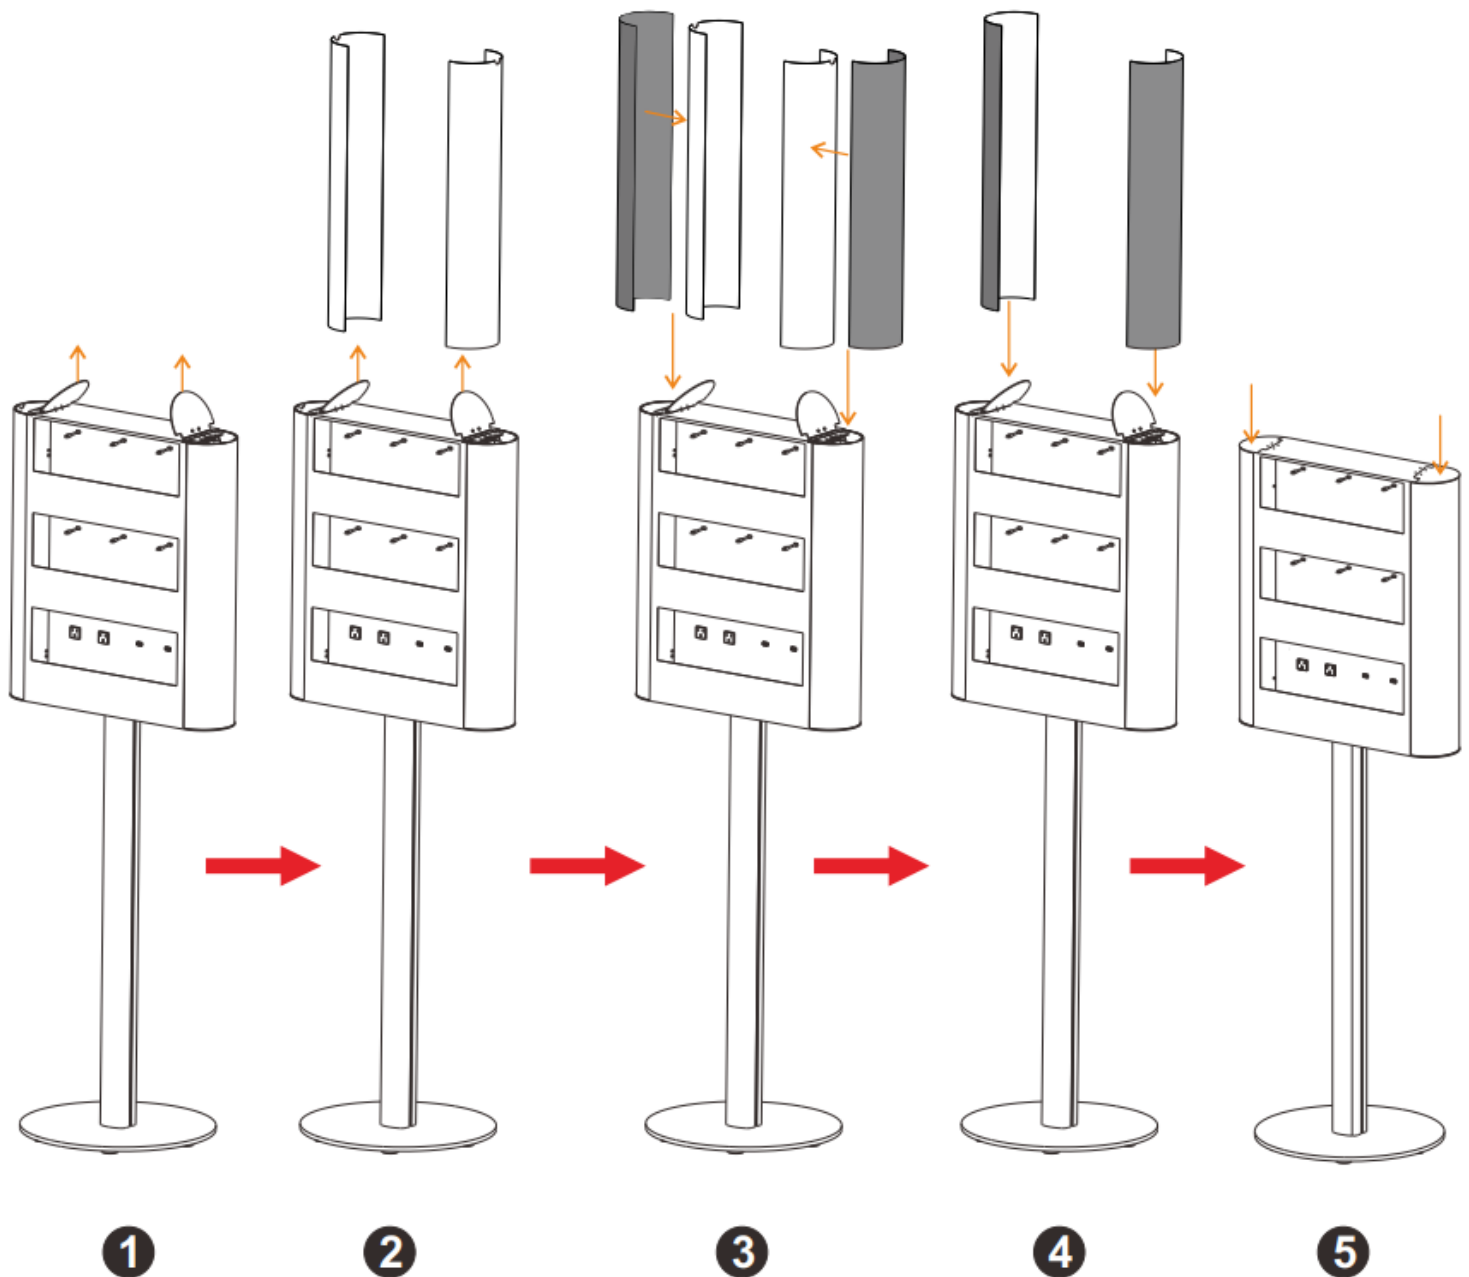

Charging Station Operation

Once assembled, plug in the AC power cord and flip the power switch to ON. The charging station illuminates and the charging cords are active.

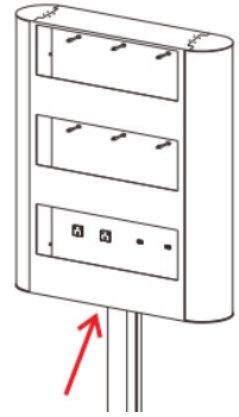

Technical Specifications

Power Output

- AC 110 V / 50-60 Hz

Included Charging Ports

- USB x2
- USB Type-C x3
- 8-Pin Charging x3
- AC Outlet x2

Fast Charge Protocols

- Supports DCP (BC1.2, Apple, Samsung)
- Supports Qualcomm Quick Charge Protocol QC2.0 and QC3.0
- Supports Huawei Fast Charge Protocol FCP
- Supports Samsung Fast Charge Protocol AF

Integrated Charging Protection

- Short Circuit Protection
- Over Load Protection
- Over Voltage Protection
- Over Temperature Protection