

VOYAGER TV STAND WITH CUSTOM GRAPHICS

Assembly Instructions


SKU: BKDNTVSTCP

SKU: BKDNTVSTG (Replacement Banner)




Scan the QR code to visit the product page.



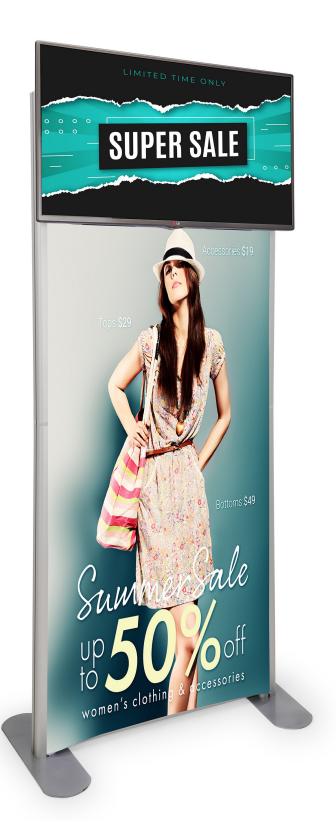

PARTS LIST

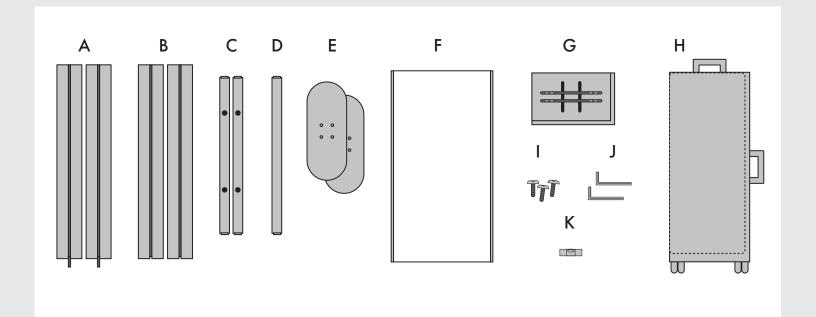

PAKI	QUANIII I
A: Vertical Pole (Top)	2
B: Vertical Pole (Bottom)	
C: Horizontal Bar	
D: Stabilizer Bar	1
E: Foot	2
F: Custom Fabric Banner	1
G: TV Mount Kit (screwdriver included)	1
H: Travel Bag	1
I: Screws	8
J: Hex Wrench	2
K: Magnetic Leveller	

SAFETY INFORMATION

- Fits most flat panel TVs 26"- 60" screens
- Load capacity: 110 pounds (50 kg)
- VESA compliance: 200×200 mm, 200×400 mm, 300×300 mm, 400×400 mm


Assemble Standing Poles

- Screw foot (E) to bottom vertical pole (B) and tighten with hex wrench (J).
- 2. Connect top and bottom vertical poles via keyhole. Twist 180 degrees or until you feel the connection lock.
- 3. Repeat on other standing pole.



Insert Fabric Banner

- Insert plastic seals of fabric banner (F) into the front-facing channels of the standing poles.
- 2. Evenly pull banner through channels to bottom of the unit.





- Install both horizontal bars to the top of the unit, leaving space between to attach the TV mount later in the assembly. Insert metal tabs into the channel of the vertical pole, then use the hex wrench to expand locking mechanism.
- 2. Repeat on other side, making sure bars are level using magnetic leveller.
- 3. Add stabilizer bar (D) to bottom of unit.





Attach TV Mount

- Screw TV mount (G) to black holes of horizontal bars.
- 2. Follow enclosed TV mount instructions to attach mounting bracket to your screen.
- 3. Lift and carefully attach screen to TV mount. Check that TV is securely installed before releasing.





Assembly is complete.

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.