



DISPLAYS2GO
CONNECTING PEOPLE & BRANDS WITH THE WORLD



CRYSTAL LED LIGHT BOX SIDEWALK SIGN

**Assembly
Instructions**

SKUs: CLEDSN Series

PARTS LIST



Scan QR code
to visit product
page



NOTE: Wingnut screws (pictured above) are removable and are composed of three pieces, as shown.


REMOTE DETAILS:

Top Row (L-R): Increase Brightness, Decrease Brightness, Play, Power On/Off

Function Buttons: Flash (blinking lights), Strobe (multicolor rapid flashing), Fade (transitions between colors), Smooth (tricolor blinking)

Bottom Section: Allows for customization. Press "DIY" button, then use arrows to set desired light pattern.

NOTE: Remote controls ONLY LED lights on the side of the unit. Poster backlight can be controlled by unplugging to turn off.

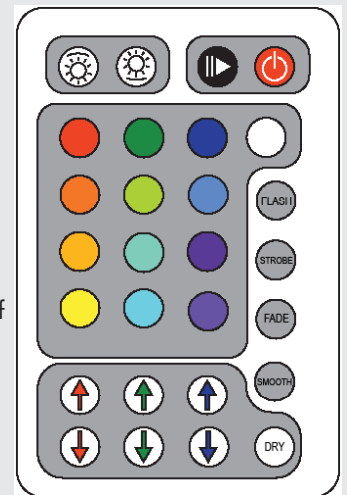

Signage ships fully assembled, as shown at left.

NOT PICTURED: Power supply cable (1).

NOTE: Graphic not included.

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.



1. Lay unit down on a soft surface. Carefully unscrew wingnut bolts to remove top glass panel. Adjust unit as needed to access screws.
NOTE: Wingnuts are three pieces.



2. Lay graphic onto the signage. Ensure that the graphic is straight and as desired.



3. Screw wingnuts tightly back into unit to secure graphic.

4. Stand unit upright. Connect cable to on-unit wire; this controls the LED lights on unit.

5. Plug cable into an electrical outlet. Use remote to turn on LED lights; change light colors as desired using remote.



Enjoy your new sidewalk sign!

CONTACT INFORMATION:
www.displays2go.com
PHONE: 844-221-3388