DISPLAYS2GO



PORTABLE CHARGING ENCLOSURE Assembly Instructions

SKU: JTCPCS16D

PARTS LIST



Scan QR code to visit product page



PART QUANTITY A: Charging Trolley......1

WARNING: Make sure the AC power section (plug/ socket) does not get wet.

NOTE:

The appliance is applied to AC input voltage range: 90-264 VAC; 50/60Hz.




TO CHARGE

1. Lie case flat. Unlock latches and open the upper lid.

2. Plug AC power cord into the socket of the external plate, as shown below.



If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.

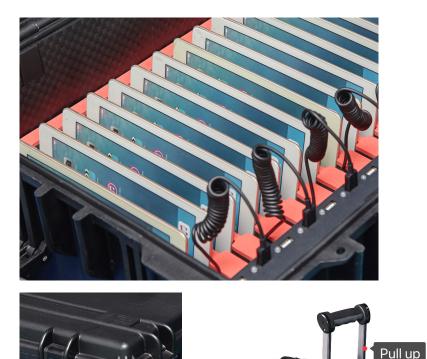

3. Put mobile devices into slots and connect them to the USB ports.
4. Power on the switch of the external plate and start charging.
NOTE:
Red LED = charging
Green LED = fully charged

TO MOVE

1. Unplug and disconnect all of cords, lines, and mobile devices.

2. Close the upper lid and lock latches. NOTE: Locks not included.

3. Draw out the extractable handle and move.

to clean

- Always unplug the charging trolley before you clean it.
- Clean surface with a soft damp cloth.

Lockhole

STORAGE

• Store charging trolley in the conditions of temperature - 13°F—122°F and relative humidity 20-90% RH noncondensing.

ENVIRONMENT

• Do not throw away the appliance as the normal household waste, but hand them in at an official collection point for recycling. By doing this, you help to preserve the environment.



Enjoy your new portable charging enclosure!



Scan QR code to visit product page

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.