



20' Trade Show Booth Kit with TV Mounts, Shelves, and Convertible Podiums

Assembly Instructions

SKU: EX20CB213 Exhibit Booth

SKU: EX213RPRT Booth Replacement Graphics

Scan the QR
code to visit the
product page.



Safety & Care Information


Before beginning assembly, please take time to read through the instructions and understand each step thoroughly. Displays2go is not responsible for any personal injury or product damage due to mishandling, incorrect mounting, incorrect assembly or incorrect use of this product.

- ⚠ Wear the included gloves to protect your hands during assembly!
- ⚠ The weight capacity of the convertible countertop is 22lbs.
- ⚠ The monitor bracket is recommended for use with monitors 15"-27" wide and weighing less than 30lbs.
 - Supported VESA sizes: 75x75mm, 100x100mm

Fabric Graphic Care Instructions

Machine wash with cold water on a gentle cycle using a mild detergent. Do not use bleach. Tumble dry on low. Fabric must be completely dry prior to storing. Use a steamer to reduce wrinkles and fold lines after the graphic is on the frame.

Components

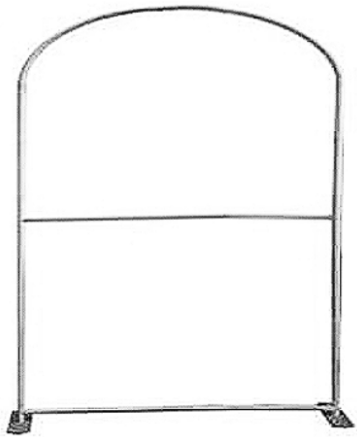

Curved Aluminum Frame (x1)



Arched Aluminum Frame (x2)



Backwall Shelf (x2)



Floating TV Mount (x2)



Convertible Case/Counter (x2)








LED Light (x4)



Custom Fabric Graphic (x5)

Curved Backwall Assembly


1. Unfold and expand the aluminum frame poles, securing the push-buttons.
2. Connect all aluminum poles to assemble the frame, following the numbered stickers.
3. Press in the push button to connect each pole.
4. Before adding the metal feet, pull the fabric graphic over the frame and zipper it closed over the bottom bar.
5. Attach the metal feet to the frame.

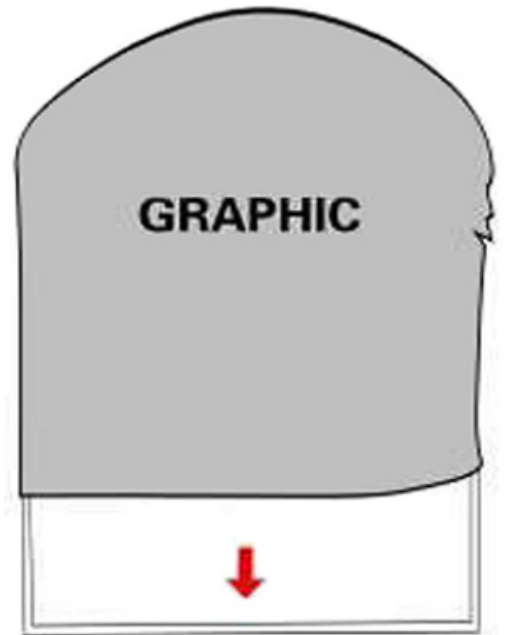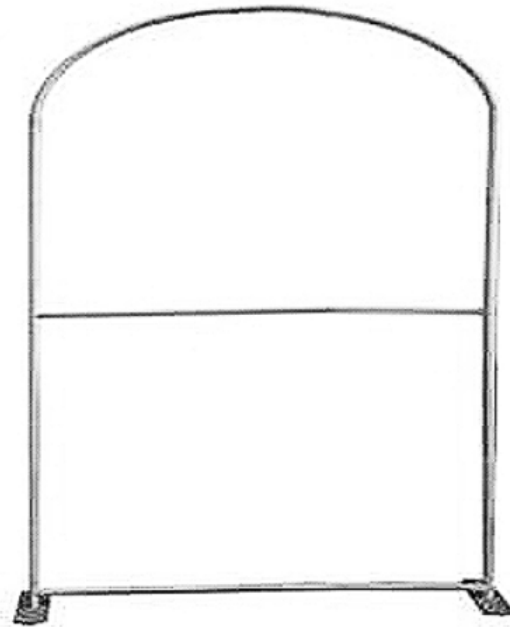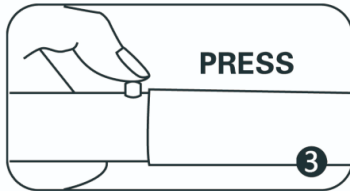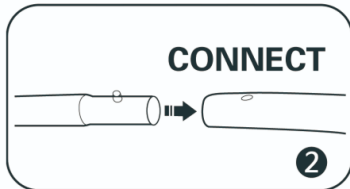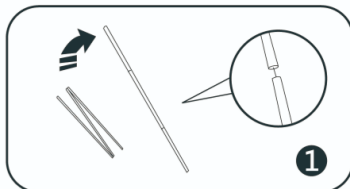

NOTE: For disassembly, slightly push the pole forward to loosen the push button and disconnect the poles.

Arched Backwall Assembly

Repeat the steps above to assemble both arched backwalls.

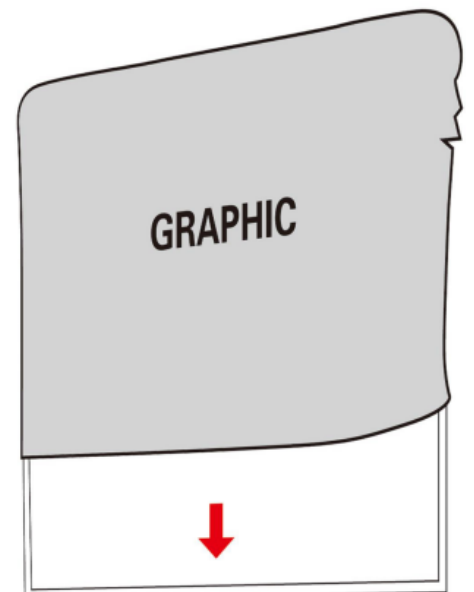


Display Shelf Assembly

1. Place the metal foot adaptor onto the frame of your backwall.
2. Connect the two pieces of the support pole together and insert onto the front peg of the metal foot.
3. Place the countertop bracket onto the support pole. Clip the other side of the bracket to the backwall frame.
4. Place the countertop onto the bracket, and clip to the backwall frame.
5. Lock the clamp on the underside of the countertop to secure.



TV Mount Assembly

1. Hold the tab and slide the VESA bracket out of the aluminum mount.
2. Attach both sides of the aluminum mount to the main backwall and side backwall. Use the built-in level to make sure the mount is straight. **NOTE:** The tab should face up.
3. Attach the VESA bracket to your monitor using the hardware and spacers provided. Make sure the wider end of the bracket faces up.
4. With your monitor attached, slide the VESA bracket back into the aluminum mount. Tuck the power cord into the slot at the bottom of the mount. Check the VESA bracket is fully inserted and stable before releasing your monitor.

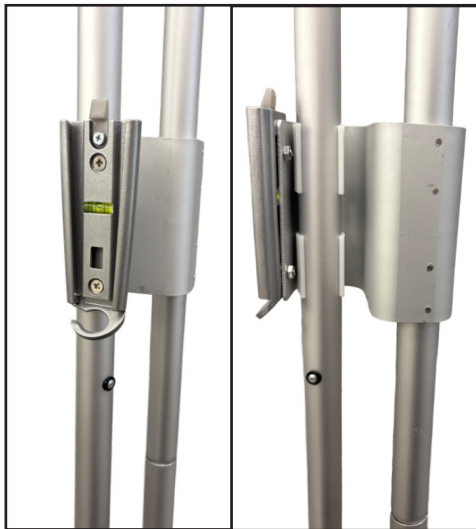

NOTE: Monitor and SEG fabric graphic not shown in assembly photos.

Storage Case to Counter Conversion

The hard storage case also converts to a pop-up counter.

1. Place the half of the case with the wheels on the ground.
2. Twist the 4 support poles into the holes on the lower case.
3. Lower the top case onto the poles.
4. Place the felt tabletop onto the case with the lip facing up.
5. Slide the custom fabric graphic over the entire counter.



Overhead LED Light Installation

Clamp the LED lights to the top bar of the backwall. Tighten the knob to secure.



Assembly is complete.