



Smart Life

Thank you for using smart camera

1.Product Introduction

Packing list: Smart Camera x 1, Manual x 1, USB Power Cord x 1, Power Adapter x 1, Screw Accessories Package x 1



01

Basic Parameters

Product Name: Smart Camera
Pixel: 1.0Mp/2.0MP
Video Compression: H.264 High Profile
Image Enhancement: Digital Wide Dynamic 3D Noise Reduction
Local Storage: MicroSD card
Wireless Encryption: WEP/WPA/WPA2 Encryption
Power Input: 5V 1A(Min)
Total Power Consumption: 5W (Max)
Compatible Networks: 2.4G 802.11 b/g/n
Support Platform: Android/iOS

Component Description:

Reset Button: Long press "Reset" button for 5 seconds, or disconnect the power to reset the camera.
It is recommended to insert 8-64GB high-speed Micro SD card, otherwise it will not be able to store, view historical video and support important functions such as firmware upgrading.

02

2.Install APP

Download APP: scan the QR code below to download and install Smart Life. Or search "Smart Life" in Play Store or App Store to install.


Register and login: open the " Smart Life" APP to register and login follow the instructions.



03


3.1 Add the Camera - Wi-Fi Pairing (Recommended)

- Make sure Wi-Fi is enabled and the camera is placed within the range with strong signal.
- Connect the power adapter with the camera, wait for the system to start up.
- Register and login: open the " Smart Life" APP to register and login follow the instructions.
- Open "Smart Life" APP, press the '+' in the upper right corner of the main screen (Figure 01); choose "Security & Sensor", click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

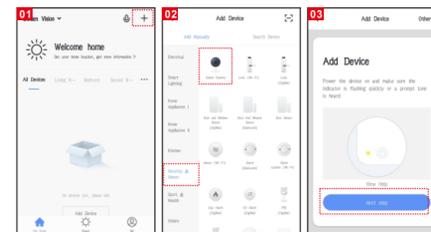


04

- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-Fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05). Note: only 2.4 GH Wi-Fi network is supported;
- Choose the Wi-Fi network to connect and enter the password. (Figure 06);

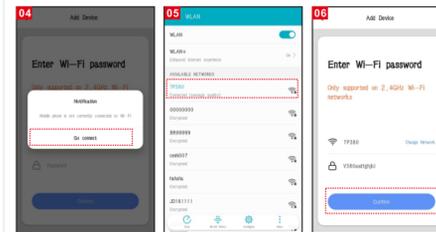


05

- Click "Confirm". It will jump to the interface and prompt to scan the QR code with camera. Click "Continue" (Figure 07);
- A QR code will display on your screen and you need to scan it with the Smart Camera. (place the camera about 15-20 cm away from the smart phone). Then click "hear the prompt sound" (Figure. 08).

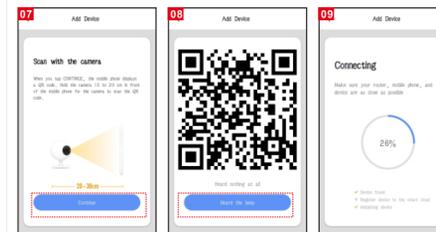

06


- When the progress reaches 100%, the camera is successfully connected (Figure 10). Click "Done" at the top;
- The screen will switch to preview of the camera (Figure 11).
- Close the camera view to return to Home page. The camera connected will be listed on the Home page. Click on the camera icon to launch the live monitor view (Figure 12).

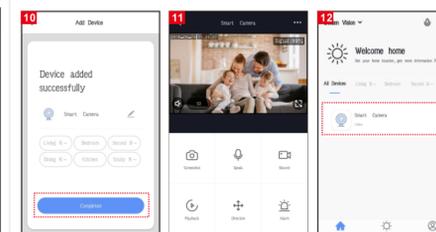

07


3.2 Add The Device-AP Mode

- If you want to use AP Mode,press the reset button on the machine
- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, system startup completed.
- Open "Smart Life" APP, press the '+' in the upper right corner of the main screen (Figure 13); choose "Security & Sensor", click "Smart Camera" (Figure 14) to add camera ; Alternatively, choose "other ways" to add (as shown in Figure 15);

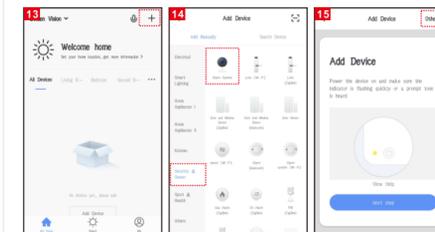


08

- Then click "hot spot configuration" (Figure 16);
- Then click "compatibility mode", clicks"Next" (Figure 17);
- Then click "change Network" (Figure 18);

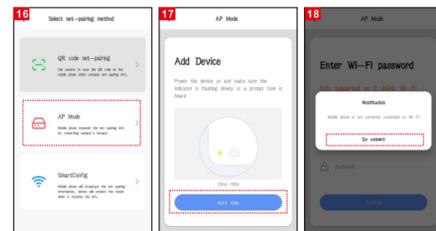


09

- Then enter the password to complete the connection (Figure 19);
- Click Back and return to the APP compatible mode interface, where the Wi-Fi name and the connected Wi-Fi name are displayed Password, click the "Confirm" button (Figure 20);
- The page jumps to where the interface prompts "Wi-fi" to connect to the device hotspot and clicks "Connect" (Figure 21)

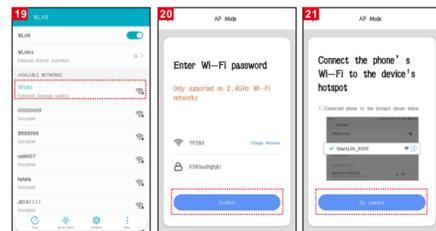


10

- The interface jumps to the WALN connection interface, finds the Wi-Fi at the beginning of "Smart Life", and clicks on the connection (Figure 22);
- When the connection is completed, click back and return to the APP interface, at which time the APP display device is connected (Figure 23).
- At this time, the device has been successfully connected; the interface jumps to "Add Device Successfully" (Figure 24);

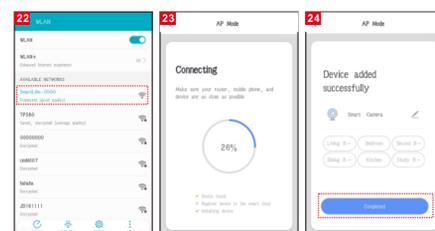

11

- Then click "connected", it will jump to the Preview Interface of the Device (Figure 25)
- Close the device preview interface and the interface returns to the APP home page, at which point the connected device will appear on the APP home page.(Fig. 26). After entering the device interface to view, no need to re-add, click directly into the device interface to view .

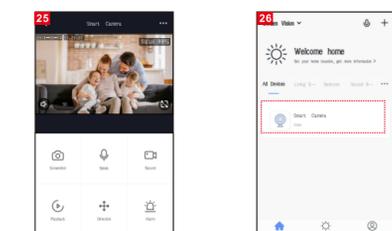

12

4.APP Video Browsing Details



- ①Preview mode
- ②Monitor Switch
- ③About device
- ④SQ
- ⑤Full screen

13

5. Note

- Do not block the Wi-Fi signal by wall or furniture.
- Do not place the camera near the microwave oven.
- Keep the camera away from AV cables and data cable.
- To get strong Wi-Fi signal, place the camera close to the router with less objects in between.
- To connect the security camera to another network, please reset/restart the camera first.

14

The name and content of the harmful substances in the product

Part Name	Harmful Substance					
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE
shell	○	○	○	○	○	○
Board	X	○	○	○	○	○
charger	○	○	○	○	○	○
annex	○	○	○	○	○	○

This form is based on the provisions of SJ/T 11364.

This product conforms to RoHS environmental protection requirements. At present, there is no mature technology in the world to replace or reduce the lead content in the electronic ceramics, porcelain, optical glass, steel and copper alloy.

15

Maintenance records: _____

Maintenance time: _____

Fault conditions: _____

Fault cause: _____

Troubleshooting: _____

Return and exchange proof: _____

Date of validity: _____

Original device ID: _____

New device ID: _____

maintenance personnel signature: _____

Maintenance Department seal: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____

Maintenance voucher of intelligent

Customer: _____ Mobile: _____

Address: _____

Model: _____ Camera ID: _____

Device store: _____ Date of purchase: _____

Store address: _____

Store contact number: _____