



Fold-Flat Merchandising 5-Shelf Display

Assembly Instructions

SKU: SMFFMDCP 5-Shelf Display with Illuminated Header

SKU: SMFFMD 5-Shelf Display (No Header)

SKU: SMFFMDRG Replacement Graphic

Scan the QR
code to visit the
product page.



Safety & Warnings

BEFORE BEGINNING ASSEMBLY, PLEASE TAKE TIME TO READ THROUGH THE INSTRUCTIONS AND UNDERSTAND EACH STEP THOROUGHLY.

Displays2go is not responsible for any personal injury or product damage due to mishandling, incorrect assembly, or incorrect use of this product.

 2 people are required for safe assembly and disassembly!

 Do not exceed the individual shelf weight capacity of 66lbs.


Components

PART	QUANTITY
A: Folding Merchandise Stand	1
B: Shelf.....	5
C: Shelf Support.....	10
D: Levelers	4
E: Suction Cup.....	1
F: Bolt	4
G: Cam Bolt.....	4
H: Flat Hex Wrench	1
I: Flathead Screwdriver	1
For SMFFMDCP Only:	
J: Illuminated Header.....	1
K: Custom Graphic	1
L: Graphic Header Power Cord.....	1


Assembly

ⓘ **CAUTION:** 2 people required for safe assembly and disassembly of the unit!


1. Orient the folded unit so the metal legs are on the floor. Carefully unfold and lift the upper half.
2. Secure by inserting bolts through the 2 holes on each side of the unit and fastening with cam bolts.

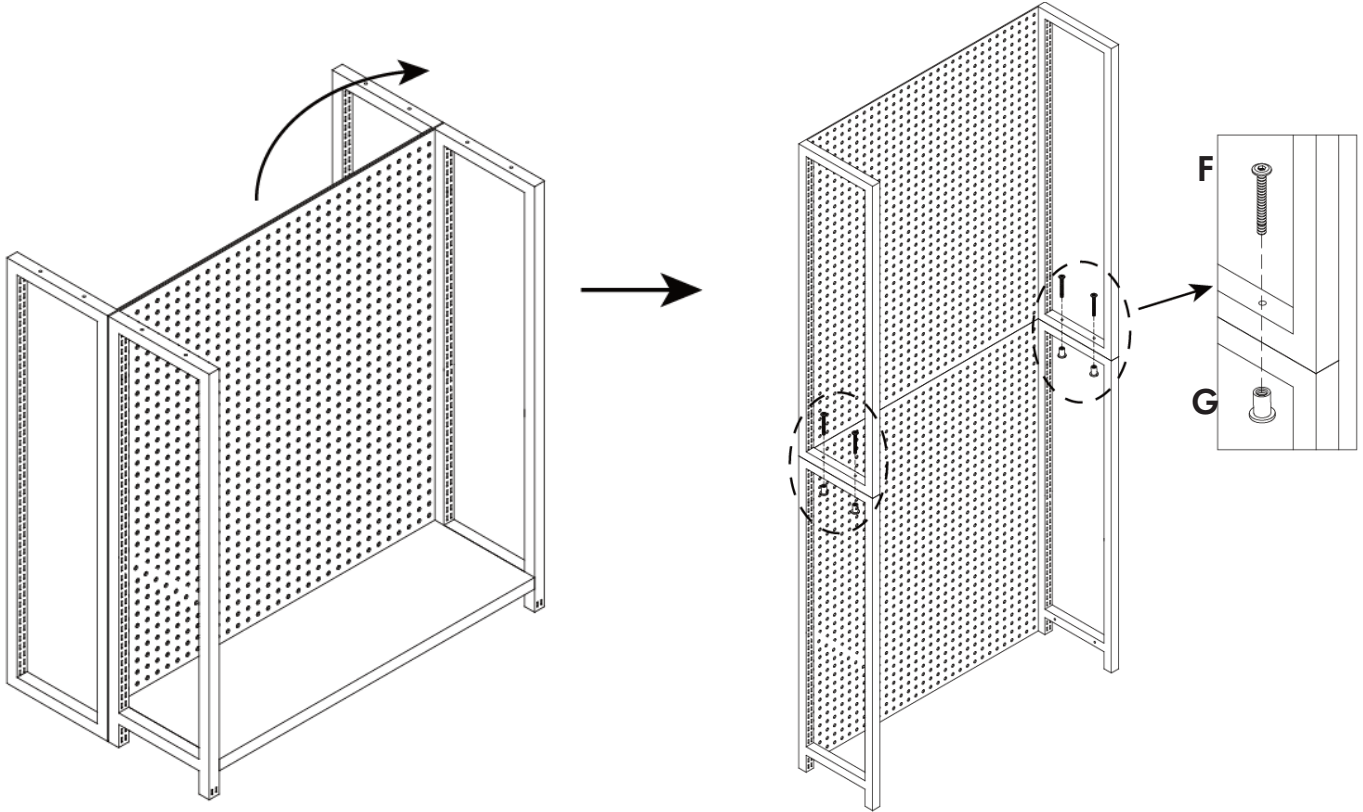

3. Carefully lay the unit down and hand-tighten the levellers into the bottom of the legs.

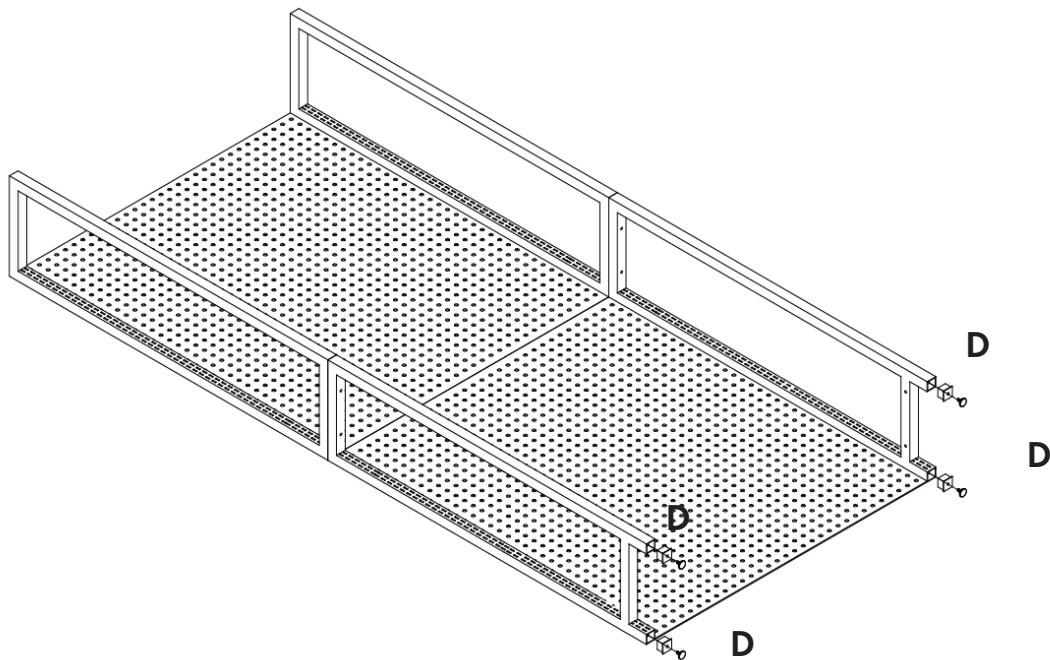

4. Insert the shelf supports into the tracks at the desired heights.
5. Place shelf onto shelf supports and press down until evenly installed. Repeat for all shelves.

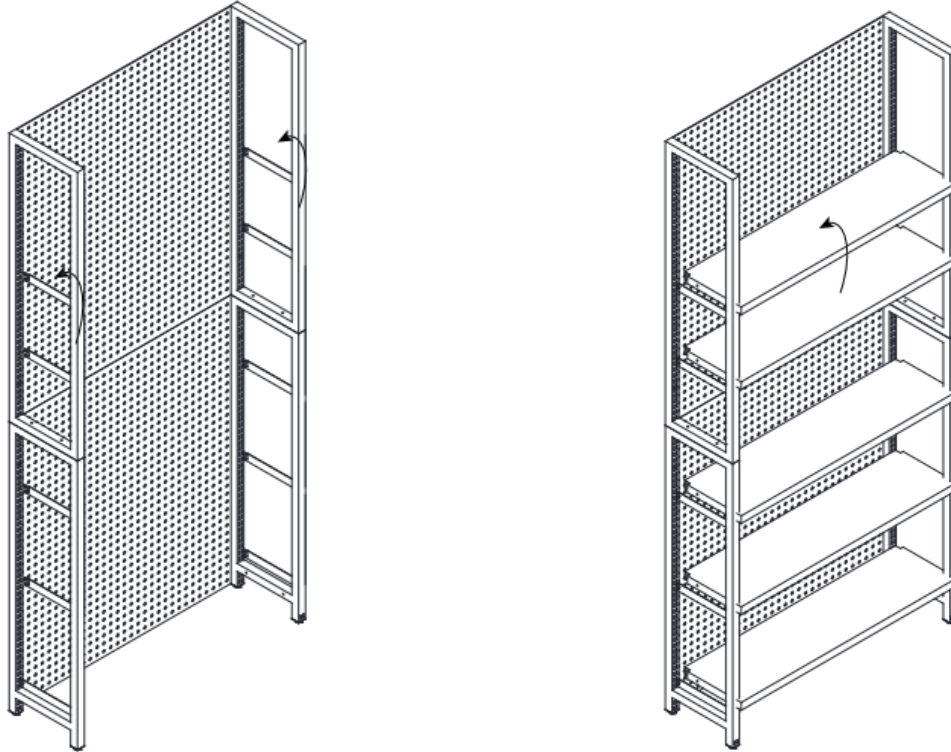


Shelving Unit Assembly is Complete.

Installing the Illuminated Graphic Header

ⓘ NOTE: For SMFFMDCP only. Not applicable to SMFFMD.


1. Insert the pegs on the sides of the header into the inner tracks on both sides of the unit. Loosen the screws to align the pegs with the track if necessary. Once the header is installed evenly on both sides, tighten the screws.

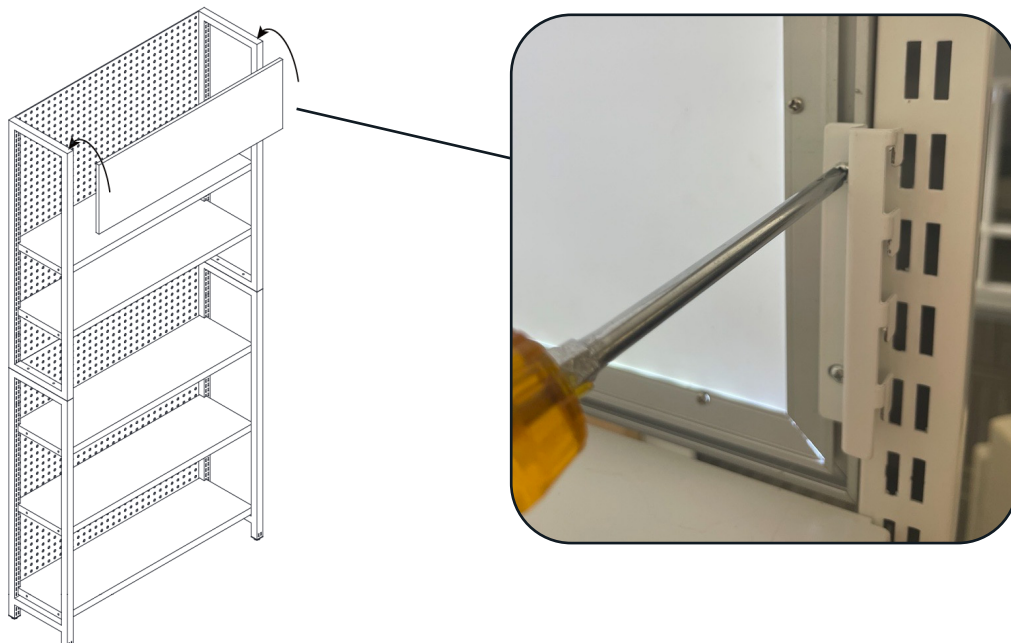

2. Insert the cord of the illuminated header into the power adaptor. Plug the adaptor into an outlet. The header illuminates once connected to a power outlet.

Input Voltage: 100-240V

Power Supply Outage: DC 12V/5A Max 60W

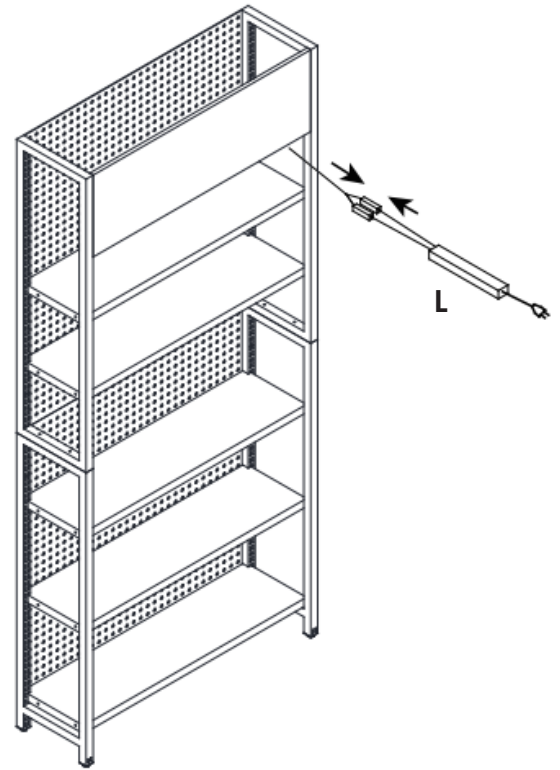

Replacing the Header Graphic

To replace the custom graphic inside the header, use the included suction cup to gently remove the lens. Center the new graphic in the frame and reinsert the plastic lens.

Assembly is Complete.

