

SKU: DIGCOM32




# DIGITAL ART FRAME EASEL - 32"

*Assembly Instructions*



# DISPLAYS2GO

CONNECTING PEOPLE & BRANDS WITH THE WORLD

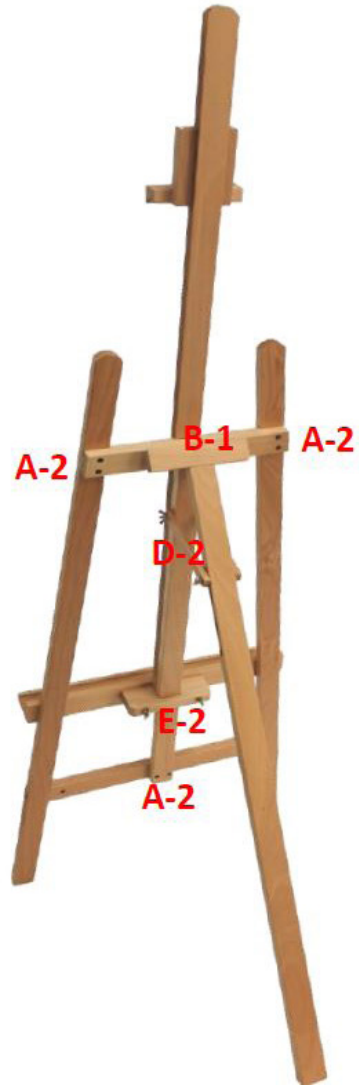

A-8



B-3



C-1



D-2




E-2




F-1

Letter represents the hardware. Number is equal to the quantity of each part.  
**NOTE: Assembly will require Phillips head screwdriver.**

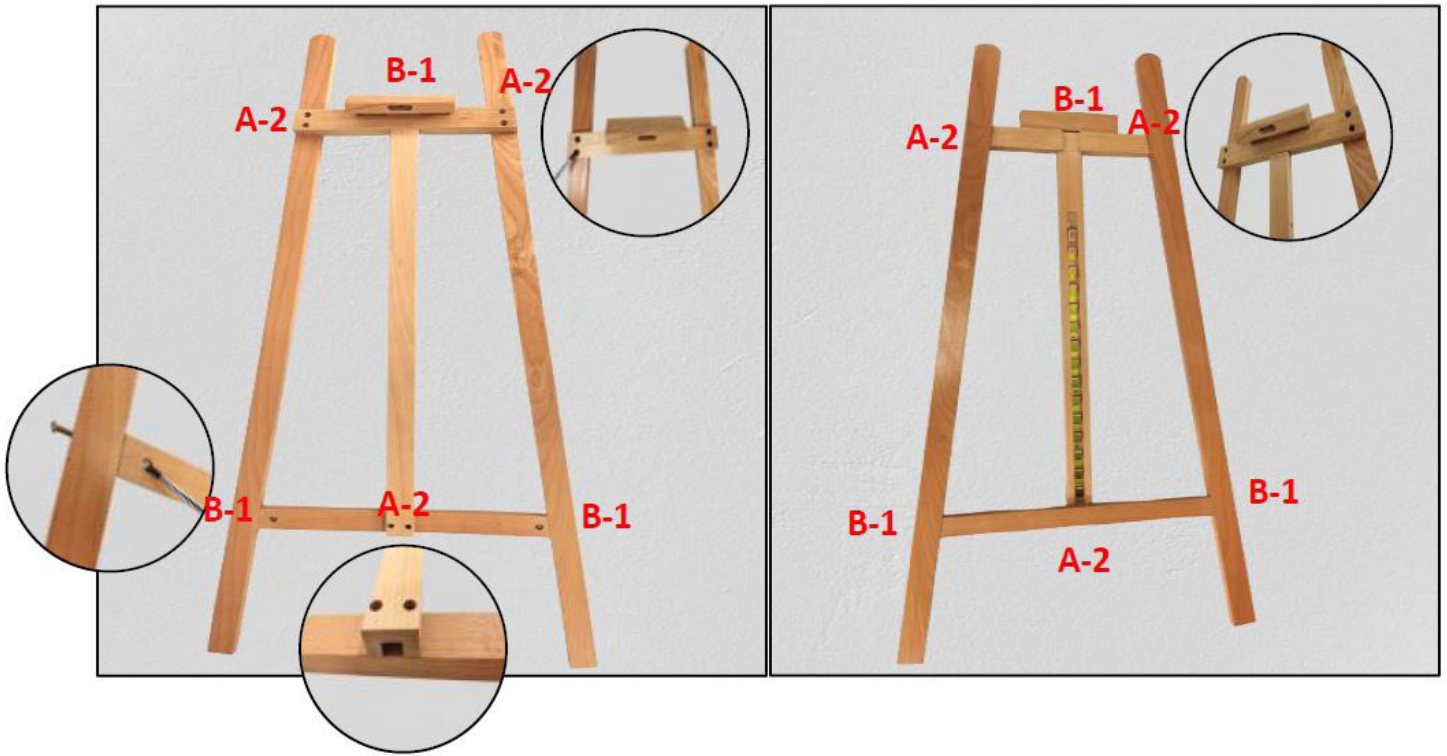

1. Install the body of the easel and connect the horizontal and vertical rods with screws.


2. Check the front and back side of the body of the easel to ensure that it is properly installed. Compare against the image above.

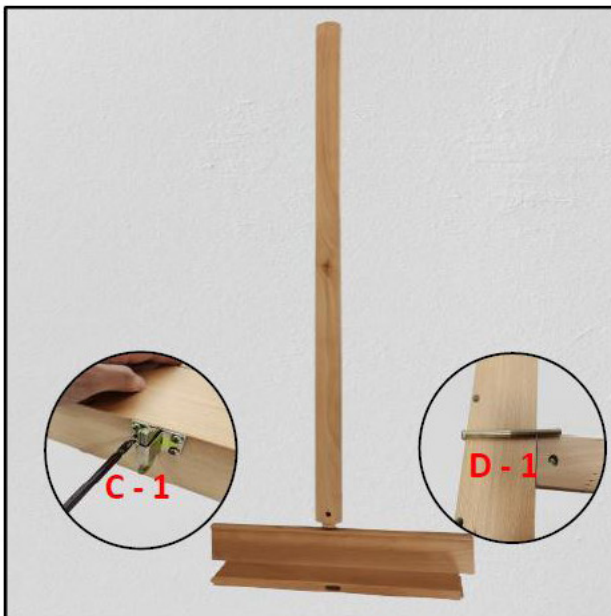

3. Connect the vertical bar to the train and install the latch, as pictured.




4. Using screw and bracket C-1, assemble the supporting bar between the body of the easel and the supporting leg. (Tilt angle can be adjusted by sliding the screws.)

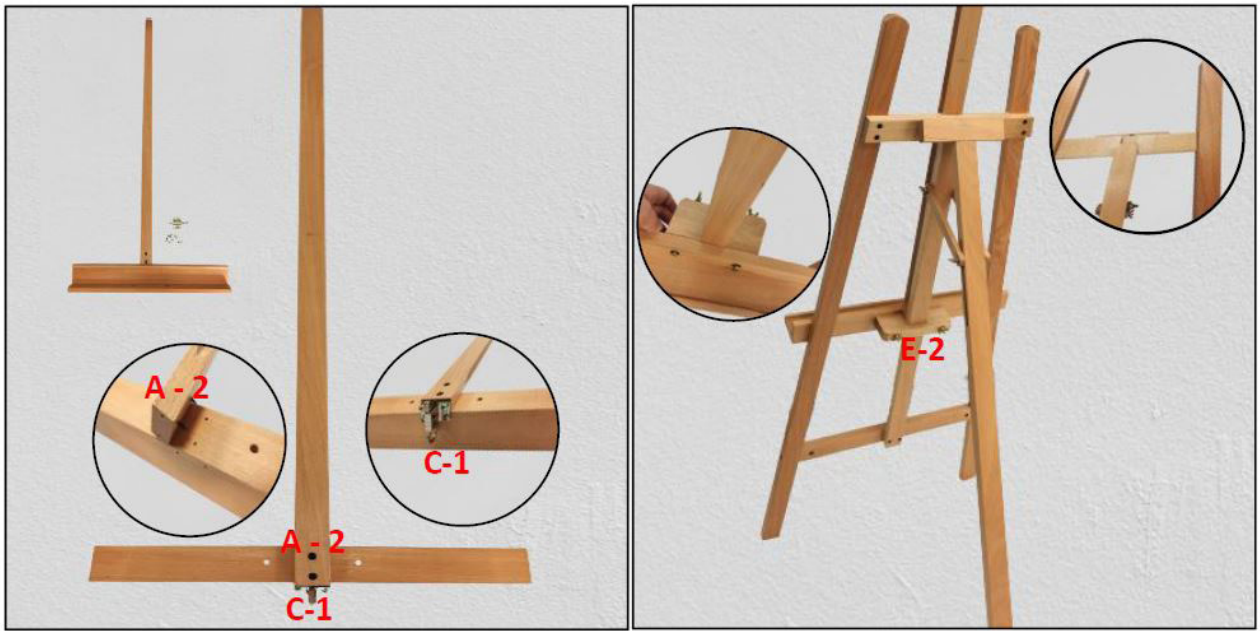


5. Connect the vertical bar to the tray and install the latch, as shown.

6. Assemble the tray and the body of the easel. Height of easel can be adjusted by sliding the latch.

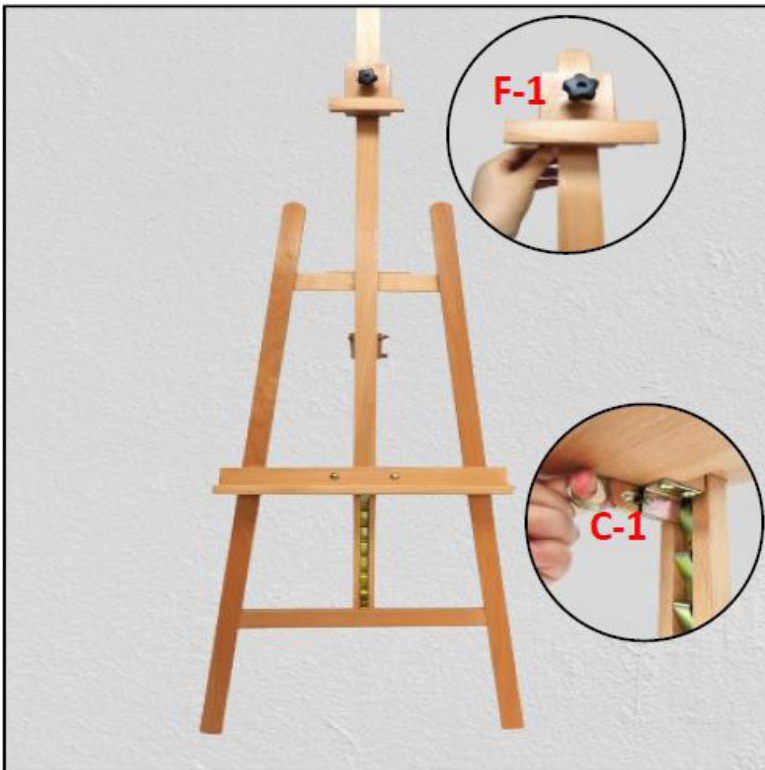


7. Install the fixing tray and lock it, as shown.





Scan QR code to visit product page.




## How to Adjust Height and Tilt Angle of Easel

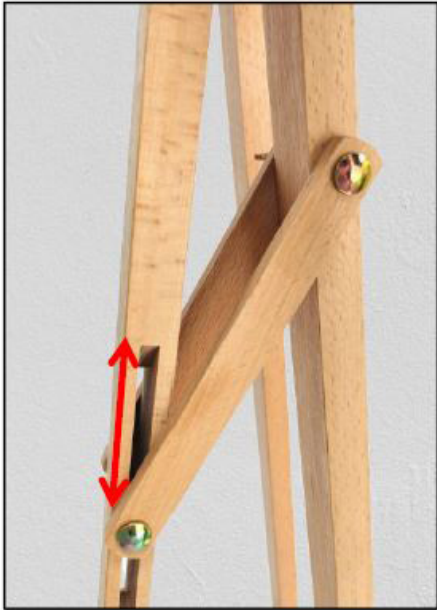

Adjust tilt angle by sliding the screws.

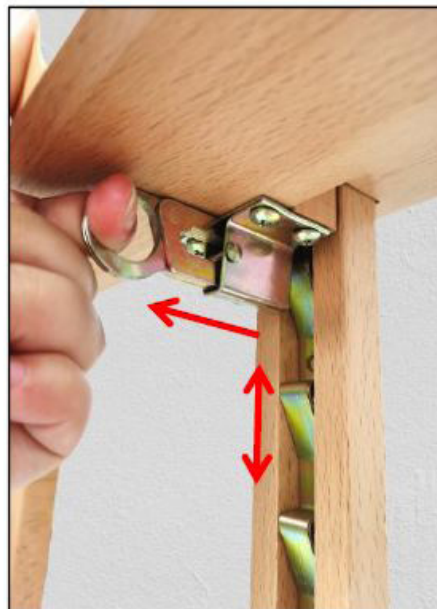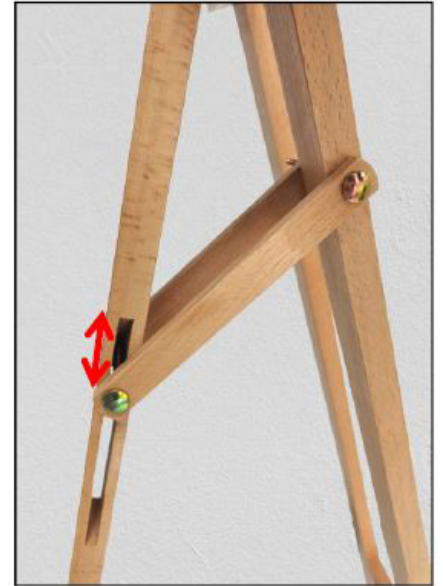

Adjust height of easel by sliding the latch.

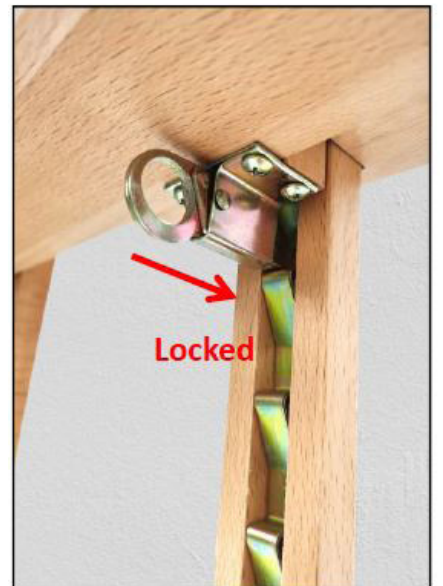

If you have any questions regarding our products, please visit us at [www.displays2go.com](http://www.displays2go.com) or contact D2G customer service at 844-221-3388.