



DIGITAL ART
FRAME
EASEL - 43"
Assembly Instructions




DISPLAYS2GO CONNECTING PEOPLE & BRANDS WITH THE WORLD



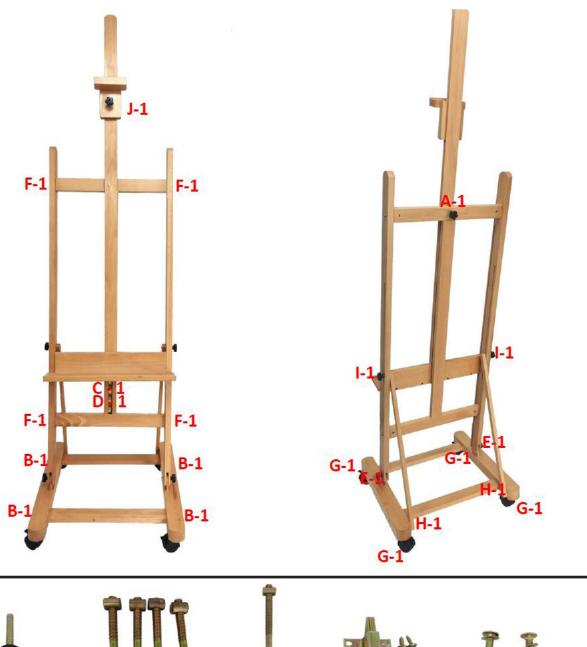


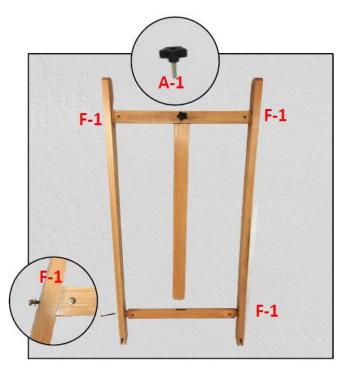

1. Install the body of the easel and connect the horizonal and vertical rods with screws.

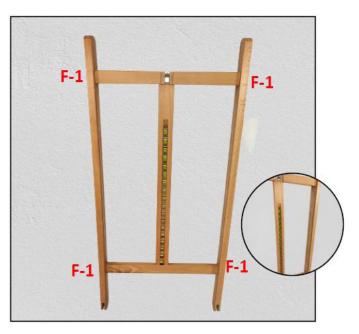


2. Check the front and back side of the body of the easel to ensure that it is properly installed. Compare against the image above.




3. Connect the vertical bar to the train and install the latch, as pictured.



4. Assemble the tray by attaching to the body of the easel. Height of the easel can be adjusted by sliding the latch.

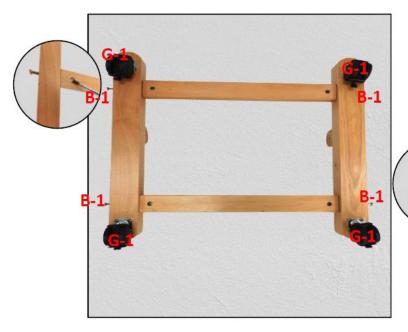



5. Assemble the base frame and the wheels by screwing together. Holes are pre-drilled.

6. Connect the body of the easel with the base with screws. Then attach the support bars, which can be used to adjust the tilt angle.






Scan QR code to visit product page.


7. Install the fixing tray and lock it, as shown.

## How to Adjust Height and Tilt Angle of Easel




Adjust tilt angle by sliding the screws.





Adjust height of easel by sliding the latch.



If you have any questions regarding our products, please visit us at www.displays2go.com or contact D2G customer service at 844-221-3388.