

Thank you for choosing our products

DISPLAYS2GO

Cantilever Bracket


INSTALLATION GUIDE

Item No.:WIAMI032M3

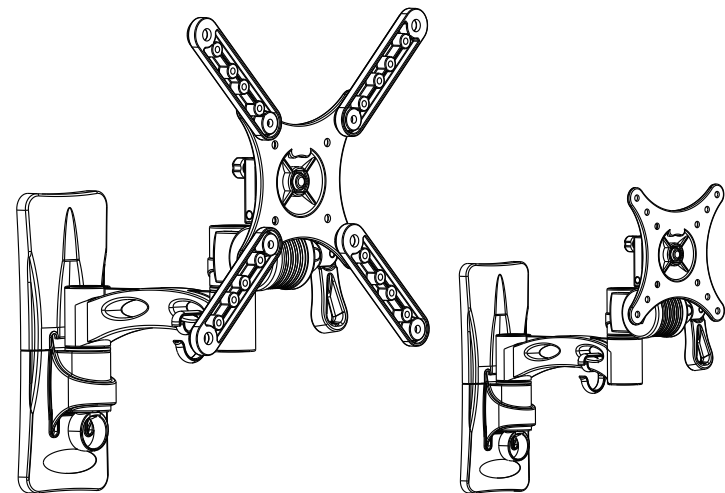


- TV Size Range: 10" ~ 42"
- Angle Adjustable
- Inside has balance adjust system
- Max load capacity: 25Kg/55lbs
- Easy installing: just glide and embed to finish installing of plate

Parts:

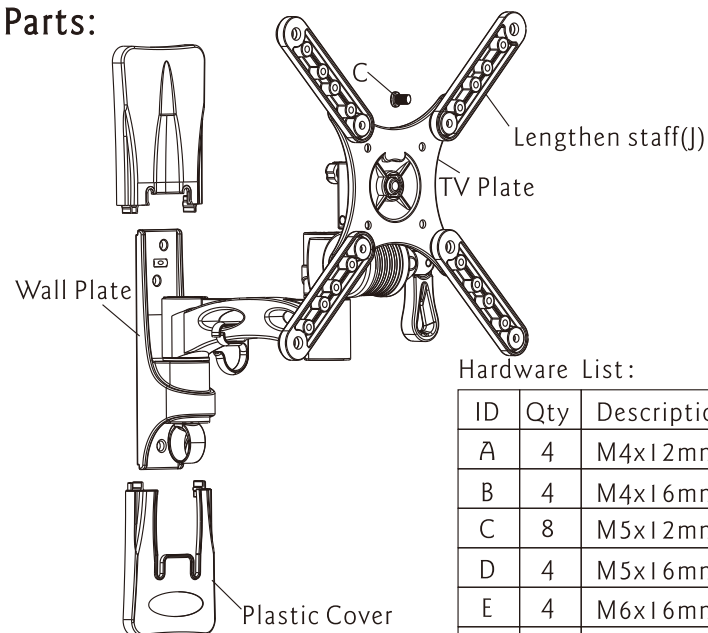


Hardware List:

| ID | Qty | Description |
|----|-----|------------------|
| A | 4 | M4x12mm bolt |
| B | 4 | M4x16mm bolt |
| C | 8 | M5x12mm bolt |
| D | 4 | M5x16mm bolt |
| E | 4 | M6x16mm bolt |
| F | 4 | M8x16mm bolt |
| G | 3 | Long Bolt |
| H | 3 | Wall Anchor |
| I | 3 | Long Bolt Washer |
| J | 4 | Lengthen staff |
| K | 1 | Her Wrench |
| L | 1 | Box wrench |

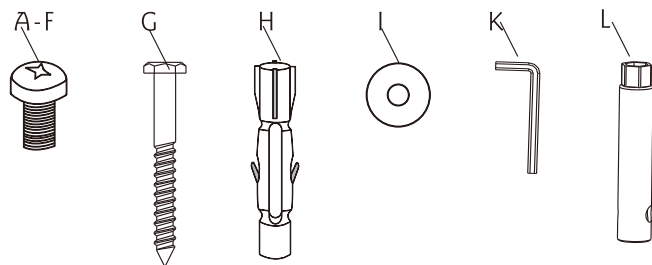

Caution: The turning angle is not too large. Or it may result in personal injury or product damage.

Use Wrench to adjust the degree of those joints.

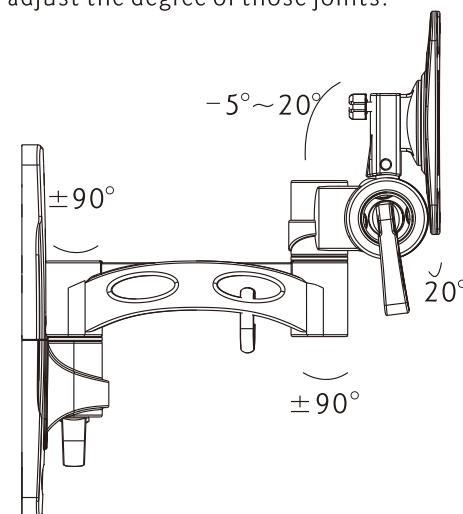

Has correctional function: If the wall plate were installed imbalance, you can adjust the TV plate to lever off the assembly. Adjust angle is 10° .

Caution : This Product LCD /Plasma Wall Mount Bracket is intended for use only with the maximum weights indicated .See apparatus instructions .Use with products heavier than the maximum weights indicated instability causing possible injury .

Step4 Hang the display

Firstly lift up the TV plate installed the LCD, making the trough on the arm fit to the trough on it ,according trough to embed the TV plate into the wall plate.

Once the TV is positioned in place, fasten the Tighten Bolts on Receiving Joint clockwise to secure the display to the Arm Assembly.

Warning: Some TV require two people to lift, as we are not responsible for any personal injury or product damage due to mishandling.

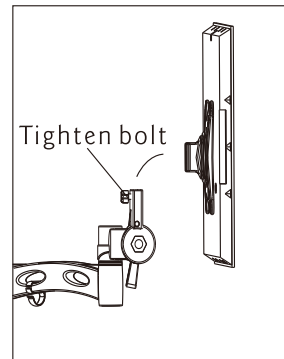


Fig 6

Display Adjustments

Roll Control

Function -Horizontal leveling of the display.

Operation -Grasp the sides of the display, and roll it into the desired position. Then adjusting Roll Tension .

Angle adjusting

1. Adjusted with the TV plate .

With circumvolve the wall Plate ,TV can adjust in the direction of left, right ,up and down. Vertical Adjusting Angle is from -5° to 20° . level Adjusting Angle is 20° .

Choose the desired angle and turn clockwise the Tension Knob on the right of the arm.

2. Adjusted with the arms.

With circumvolve the arms, TV can turning to two sides of wall until touch the wall. First joint adjusting angle is $\pm 90^{\circ}$, second is $\pm 90^{\circ}$.

Step1 Choose fitting position on the wall.

Make sure the position that the wall plate you want installed .

Important: Make sure there is enough space to spread LCD, considering the show size.

Step2 Installing wall mount

This product offers two installing ways: wooden wall and cement wall. Determine your mounting type and proceed accordingly.

Installing ways of batten wall

Use an electronic detector in lay position to detect the position of batten, then making a mark. Put the wall mount in the installing position flatly, using it as template, lining out holes in the batten. Using a aiguille of dia.4.5mm to drill three 50mm deep holes. Securely mount the wall plate with supplied Long bolts(G) and washers(I) by Box wrench(L). As shown in Fig I.

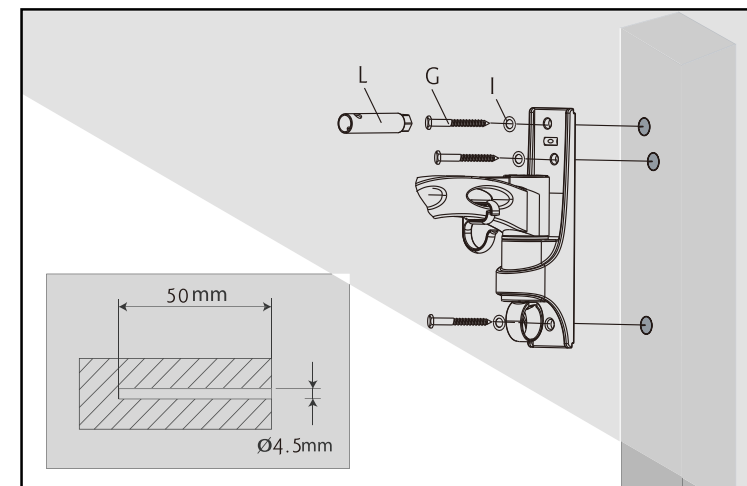


Fig I

Installing ways of cement and beton wall

Put the wall mount flatly in the installing position, using it as template, lining out the hole on the wall. Use a aiguille of dia. 10.5mm to drill three 50mm deep holes. Insert the wall anchor(H) into the mounting holes, and lightly tap them flush to the wall with a hammer. Securely mount the wall plate with supplied Long bolts(G) and washers(I) by Box wrench(L). As shown in Fig2.

Carefully: Wall anchor is just fit for cement and beton wall. Don't use wall anchor in drywall to install bracket.

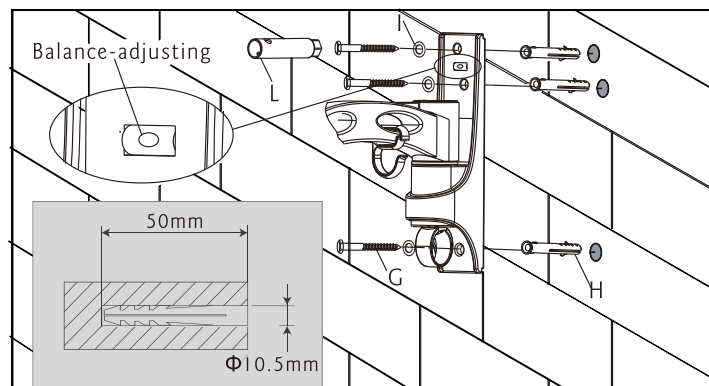


Fig 2

Using balance-adjusting system on the plate, make sure whether wall plate is installed balance. If not, then slide the wall plate let pointer level in the center position.

Installing the Plastic Cover

Secure the separated Plastic Cover over the Wall Plate by pushing them toward each other until they lock in place. See Fig. 3.

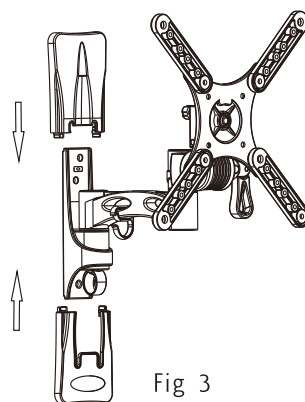


Fig 3

Step3 Installing the LCD

According LCD hole's size, deep, position to choose bolts. Using chose bolts(A-F) to install the LCD on the plate or staff. If your display > VESA 100, you need to use lengthen staff between your display and this plate. According your display hole's size, position to choose Installation lengthen staff. As shown in Fig 5.

Install the Lengthen staff(J) directly to the plate by using bolts(C) provided. (Fig 6) **Note:** capitulum down.

Carefully: Don't force the bolt to LCD hole, avoiding damage to people and instrument. Don't use electronics drill to fasten blot.

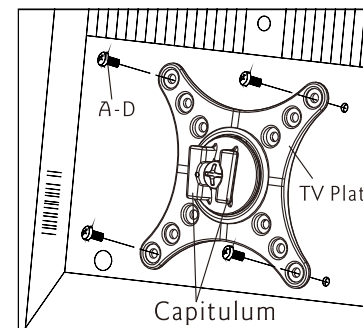


Fig 4

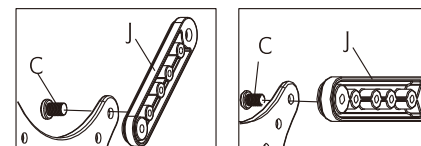


Fig 6


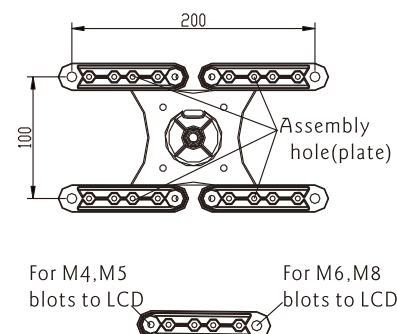


Fig 5