




Illuminated Lightbox Tower with Custom SEG Graphics, Shelf, and Monitor Mount

EXEM18FV (Lightbox Tower)

EX18FVRPRT (Replacement Graphic)

Version 1.0

Components

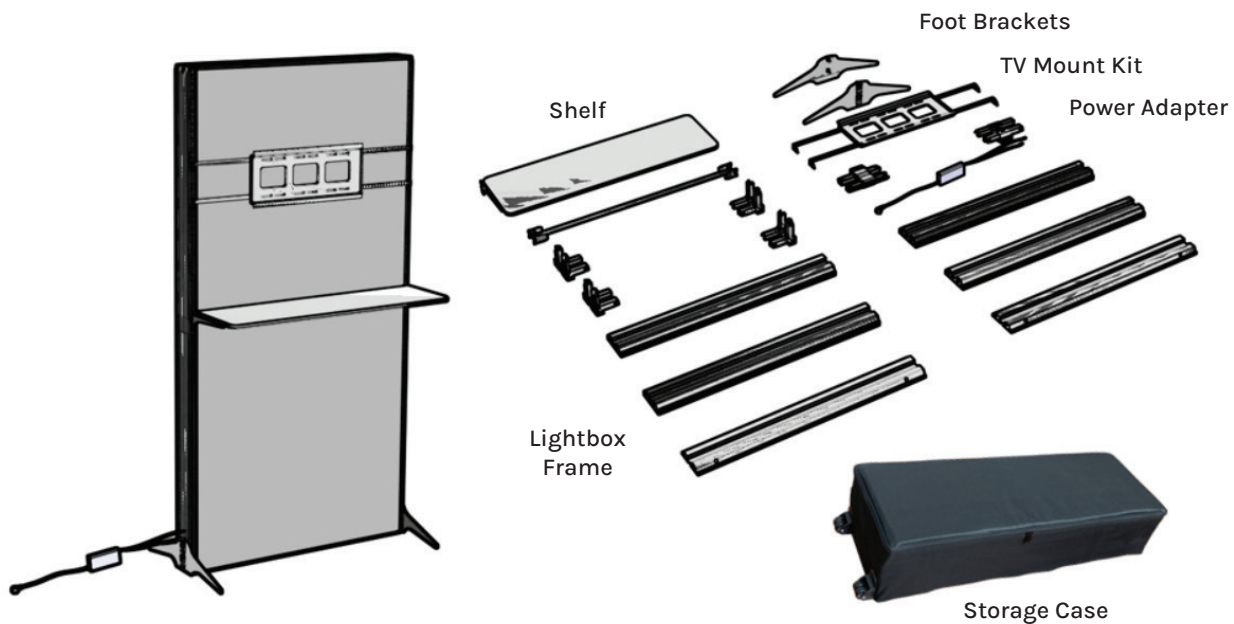

Safety Information

Before beginning assembly, please take time to read through the instructions and understand each step thoroughly. Displays2Go is not responsible for any personal injury or product damage due to mishandling, incorrect mounting, incorrect assembly or incorrect use of this product.

⚠ Safe Product Handling

- 2 people recommended for safe assembly.
- Do not exceed the maximum weight capacity of the shelf (33lbs).
- Avoid placing power cords where they could become a trip hazard.

⚠ Safe TV Mount Instructions

- Do not exceed the size or weight capacity of the monitor mount!
- 2 people recommended for safe installation!
- Make sure the TV support bars, mounting arms, and mounting plate are firmly attached before releasing the weight of the TV.

Compatible Sizes: 19"-55"

Maximum Weight: 55lbs


VESA Size: Universal VESA

Assembly

Step 1

1. Place the lower side pieces onto the bottom frame.

(To disconnect, press both side buttons and pull apart).

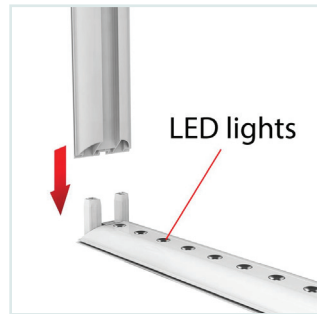


Step 2

1. Unlock the tabs of the foot brackets and insert into the channel of the frame.
2. Lock the tabs to secure the feet in place.




Step 3

1. Click the horizontal support bar into the frame.
2. Place the upper side frame pieces.

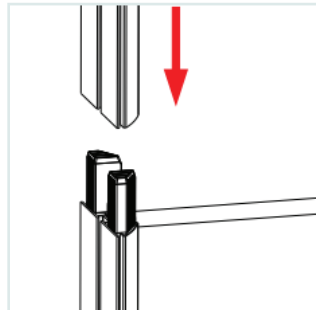

Step 4

1. Place the top frame piece.
2. Connect all internal power cables.
3. Connect power adapter.

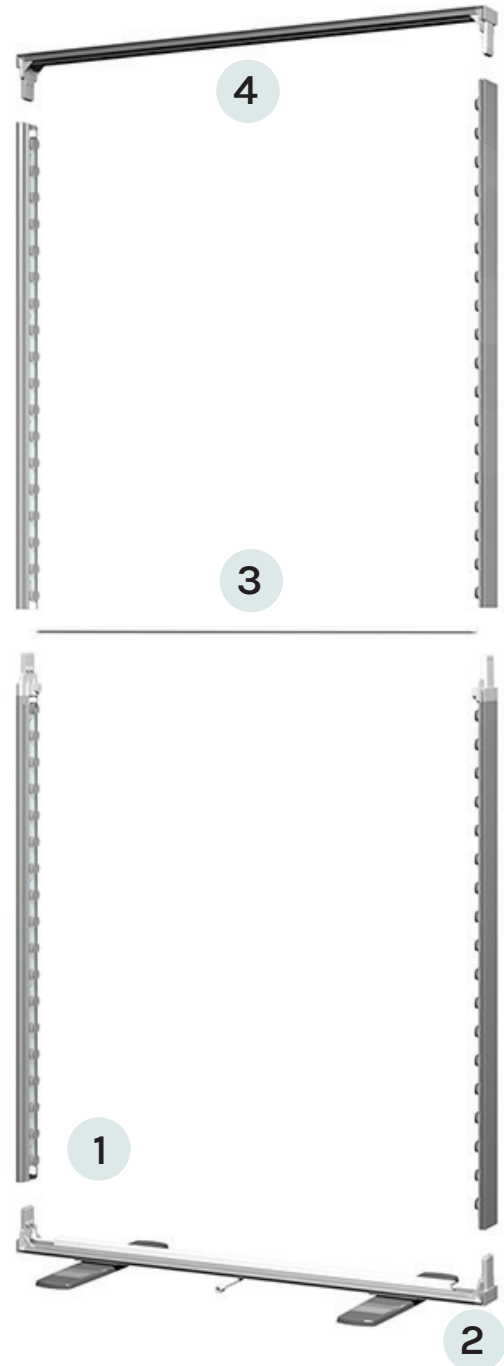

NOTE: Exact frame and foot brackets may differ from the image shown above.


Step 5

1. Install the SEG graphics on both sides of the frame.


How to Install an SEG Graphic



Bend the plastic tab to a 90° angle.

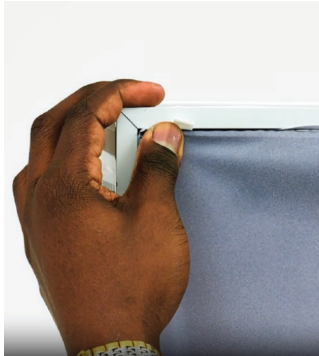

Insert into channel, starting at corners.

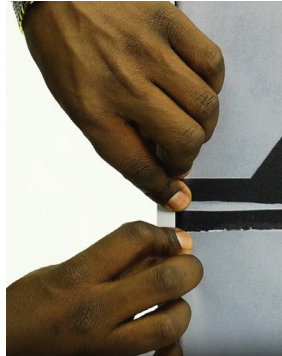

Press in the strip, moving towards the center.




Step 6

1. Attach the mounting plate to the TV support bars, then insert the hooks into the vertical tracks of the frame.
2. Install your TV monitor (see next page for details).
3. Install the shelf by inserting the hooks into the vertical tower tracks at your desired height.
4. Plug in all power cords.



- **TIP:** For cable management, slice a ½" horizontal entry cut in fabric near the monitor cord. Insert the TV cord behind the fabric, letting it fall to the base. Create an ½" exit slice to accommodate the best exit point for your needs.

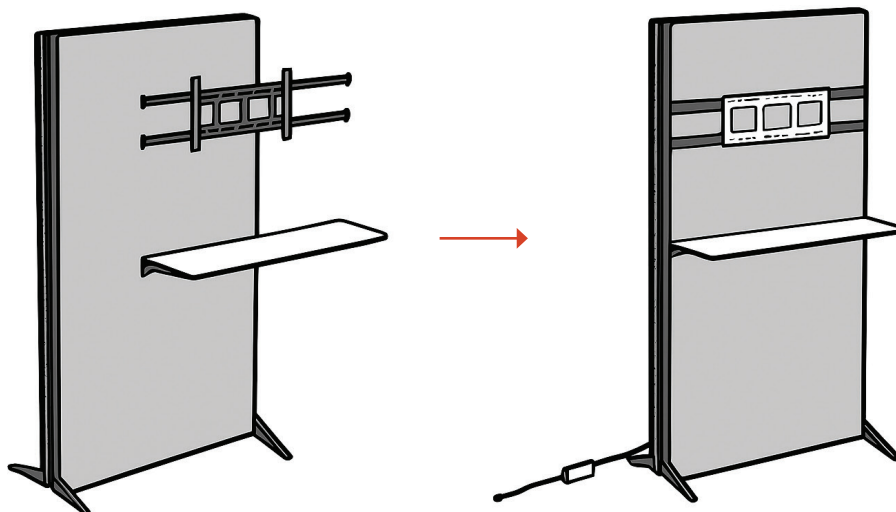

TV Monitor Installation

● **NOTE:** 2 people required for safe installation. Do not exceed the capacity of the TV mount.


Step 1

1. Place both TV support bars on the ground with the holes facing up.
2. Place the mounting plate, aligning the holes.
3. Attach the mounting plate using 4 long threaded screws, 4 black spacers, and 4 washers. Tighten with a screwdriver.
4. Hang the mounting plate on the tower by hooking the support bars into the vertical tracks.




Step 2

1. Disassemble the adjustment knob, insert it into the channel of the monitor arm, then re-tighten the pieces of the knob.
2. Repeat for the other knob.
3. Orient the arms so the hook is at the top. Align the arms with your monitor's VESA holes.
4. Use the included screws, spacers, and washers as required to fit the arms to your TV.

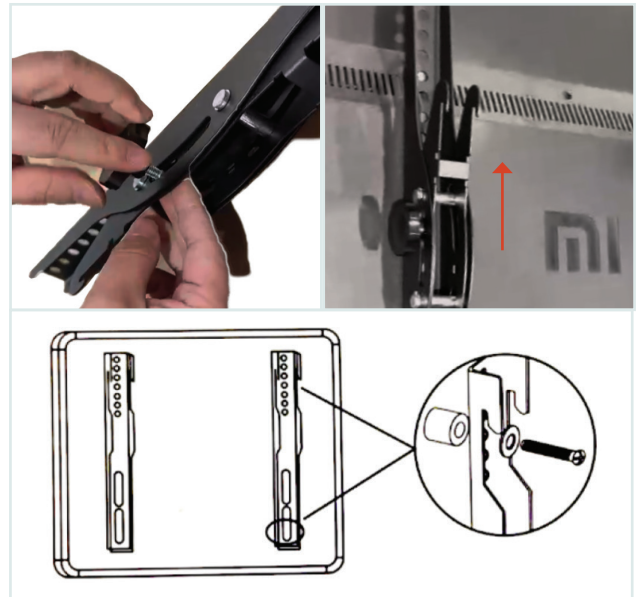

Step 3

1. (2 people recommended) Carefully hang the monitor onto the mounting bracket.
2. Tighten the 2 screws on the mounting plate to secure the TV in place.
3. Adjust the tilt of the monitor by loosening the adjustment knobs, tilting as needed, then tightening the knobs.

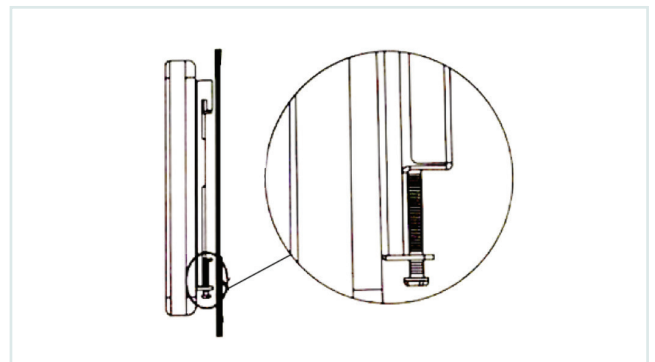

Assembly is complete.