


Enclosed Cork Board Wall-Mounting Instructions

SKU: CBSW636SV




DISPLAYS2GO
CONNECTING PEOPLE & BRANDS WITH THE WORLD



Scan QR code to
visit product page

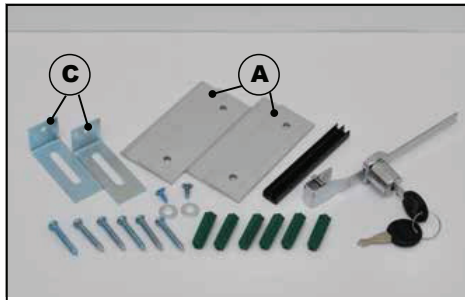

1. Mounting hardware supplied with noticeboard.

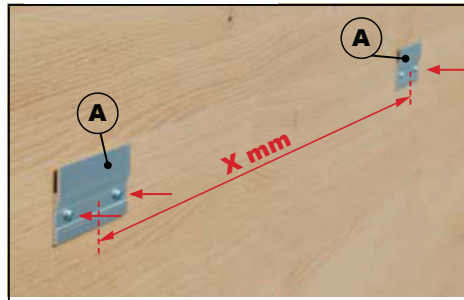

2. Screw the Z-brackets to the wall. Wall anchors are provided if mounting onto concrete wall. Distance between the brackets (X) should be equal to the distance between the mounting plate on the back of the cork board (Y).

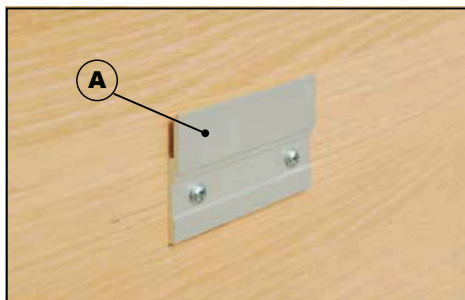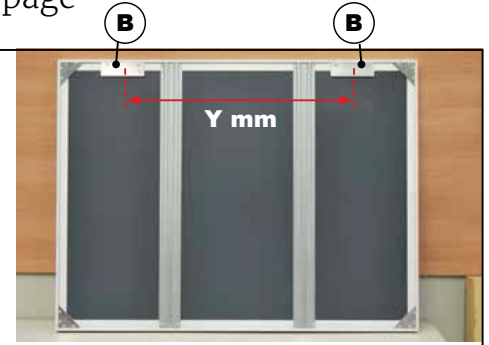

3. Lift the cork board over and hook the mounting plates (B) over the Z-brackets (A) as shown in Diagram A.




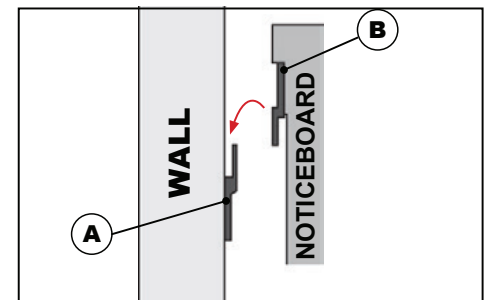


Diagram A.
This step requires a minimum of 2 people to lift.

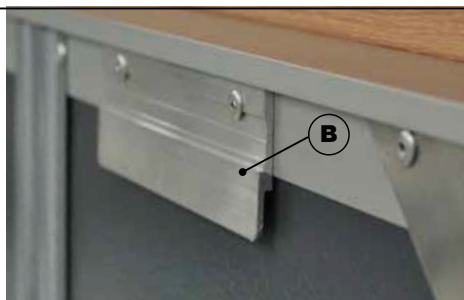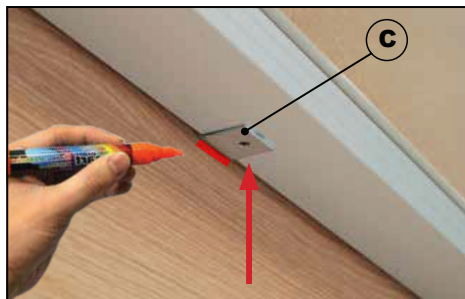

4. Align L-Bracket to the holes underneath the board and mark the position on the wall.

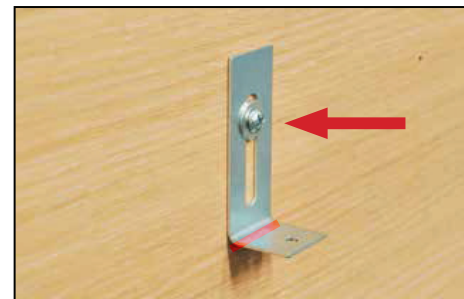

5. Remove the board. Align the L-Bracket with the marked position. Screw the L-Bracket into the wall.



6. Mount the board on the wall and screw the L-Bracket to the board to secure the board on the wall.



8. Cork board is ready to use.



IMPORTANT:
This unit requires 2 PEOPLE TO LIFT

If you have any questions regarding our products, please visit us at www.displays2go.com or contact D2G customer service at 844-221-3388.