




DISPLAYS2GO
CONNECTING PEOPLE & BRANDS WITH THE WORLD

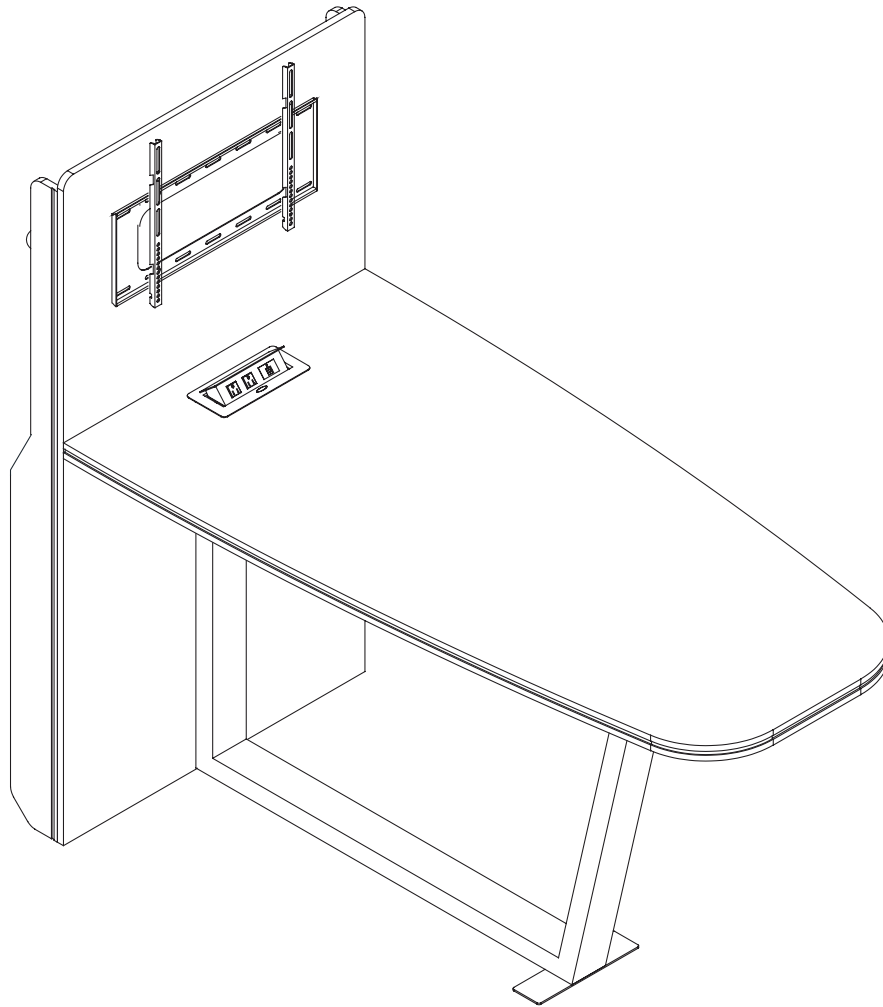

EDGE-LIT COLLABORATION STATION

User Manual


SKU: FDEDECTA

Scan the QR code to visit
the product page.




PARTS LIST


(A) Table Top - 1pc




(B) Base - 1pc

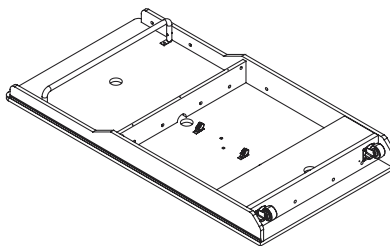


(C) Back Panel - 1pc



(D) Metal Frame - 1pc



(E) TV Wall Mount Bracket - 1pc



(F) Metal Frame Footer - 1pc




Hardware and Tools


(G) Cam Lock - 2pcs




(H) Cam Bolt - 2pcs




(I) Wood Dowel - 2pcs



(J) Bolt M6*60mm -6pcs



(K) Allen Key - 1pc



(L) Bolt M6*15mm -2pcs




(M) Screw M4*10 - 3pcs



(N) Bolt M6*12mm -4pcs



(O) Bolt M6*35mm -5pcs



(P) Grommet -2pcs



Not Included:



Philips Screwdriver



Up to 43" Screen


If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.

ASSEMBLY

! NOTE: Two people required for assembling and moving unit.


Prepare Tabletop Connection to Base.

1. Screw cam locks (G) into underside of the tabletop (A).
2. Insert cam bolts (H) and dowels (I) into the base (B). Insert grommets (P).

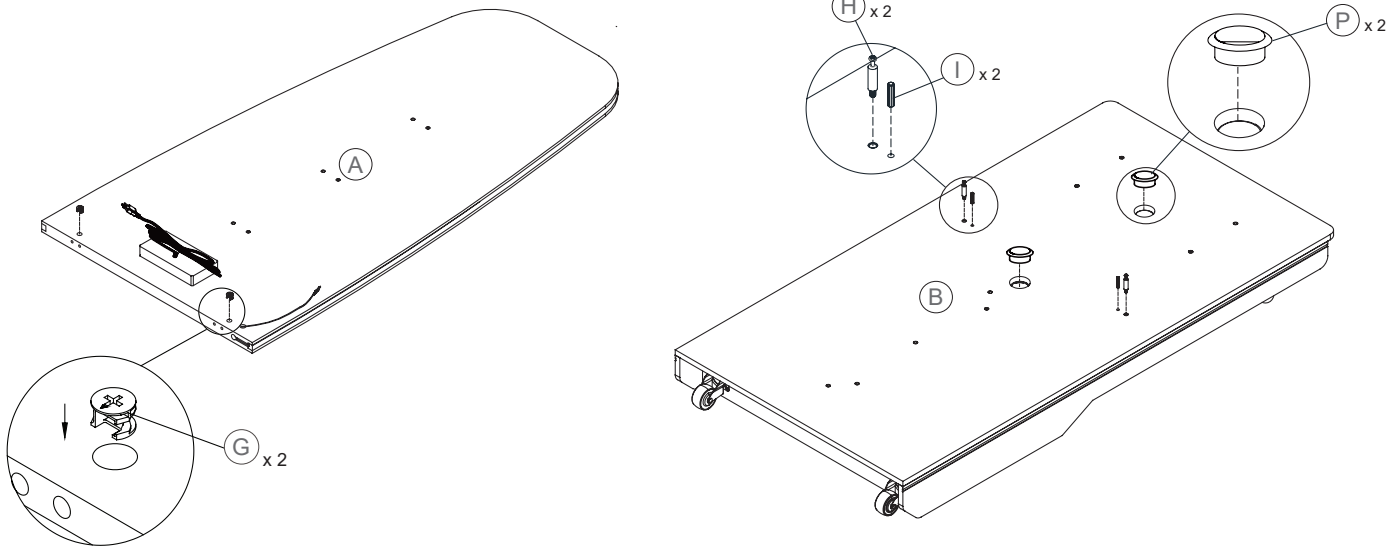


Prepare Base.

3. Attach footer (F) to underside of metal frame (D) using M6 x 15mm bolts (L), then flip over.
4. Attach frame to base using M6 x 35mm bolts (O) and tighten with allen key (K).

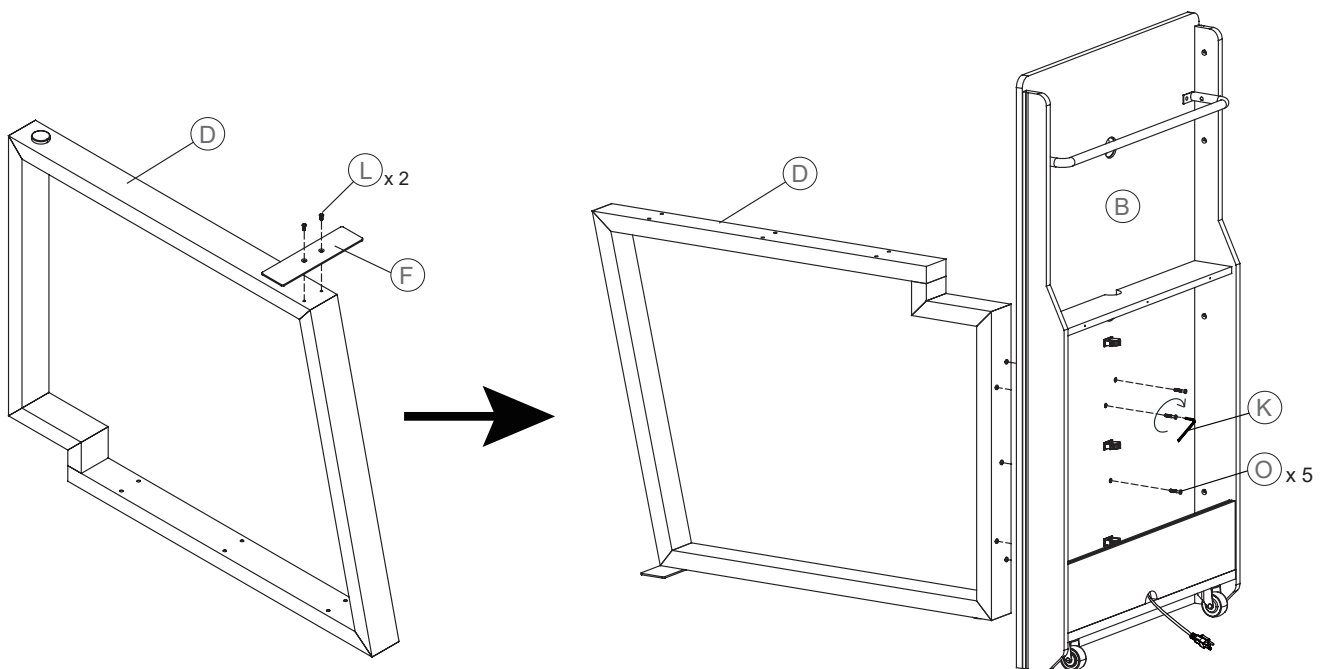


Attach Tabletop

5. Lay tabletop on metal frame and attach tabletop to base using the dowels and cam bolts.
6. Screw the metal frame to the tabletop using M6 x 60mm bolts (J). Tighten with allen key (K).
7. Feed power strip wires through the grommet and pull through to the back of the unit.

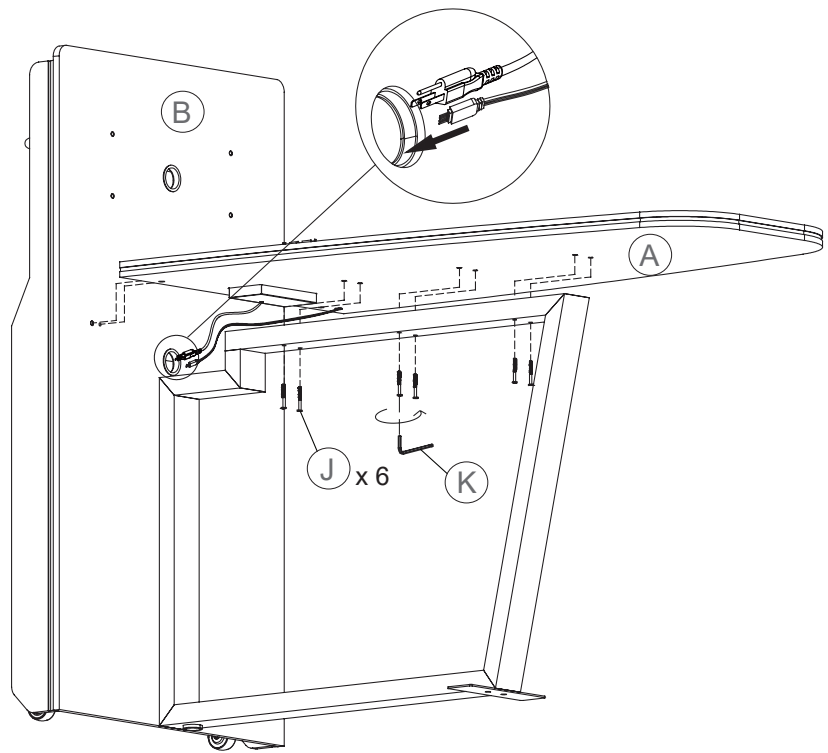


Mount Screen

- ! NOTE:** TV mount supports screen sizes up to 43". Ensure screen is securely mounted to bracket.
8. Screw mounting base into pre-drilled holes on back panel using M6 x 12mm bolts (N).
 9. Follow mounting kit instructions to securely affix your screen to the unit.
 10. Feed screen's power cord through grommet (P) into back panel.

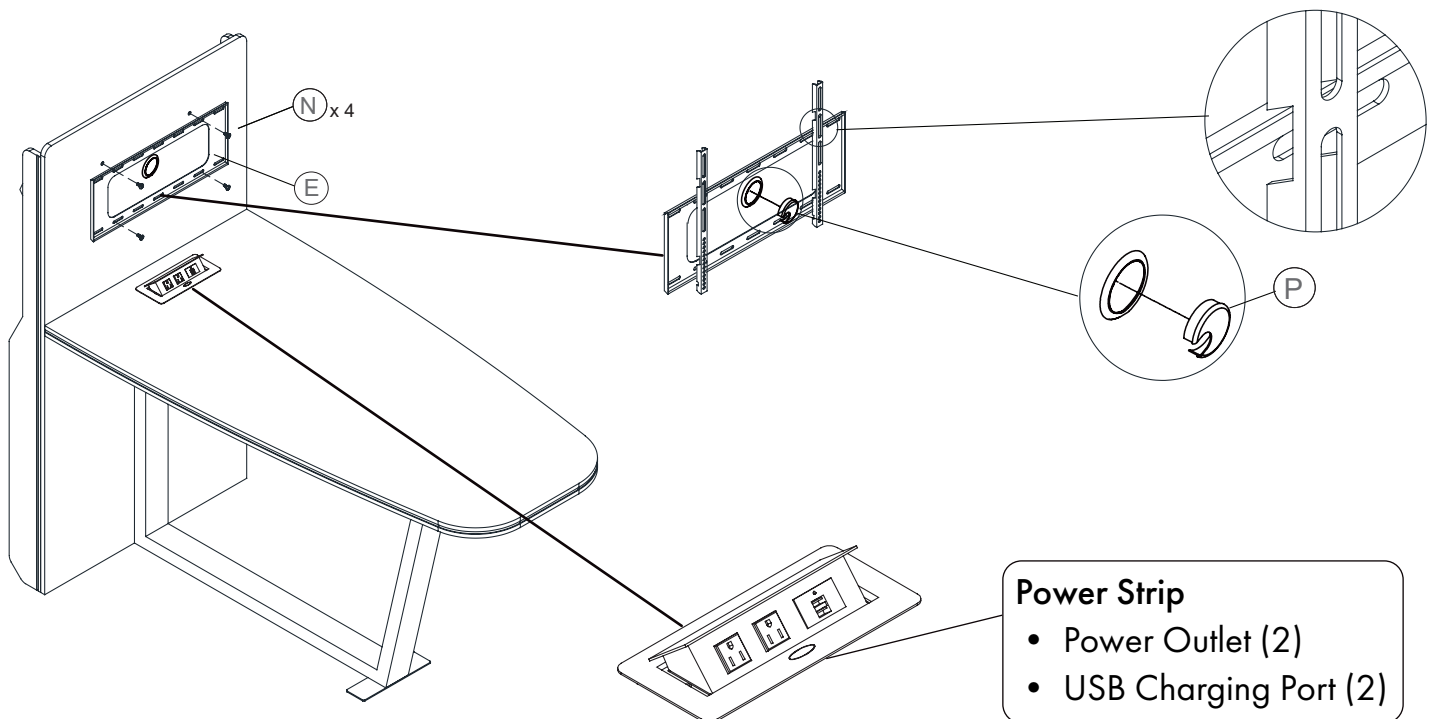


Connect Wires in Back Panel

11. Plug LED light cord into wired outlet.
12. Pull cords through plastic bracket and plug into to internal power strip.
13. Pull power cord out through panel keyhole.
14. Slide in back panel (C) and secure with M4 x10mm screws (M). Plug unit's power cord into wall outlet.

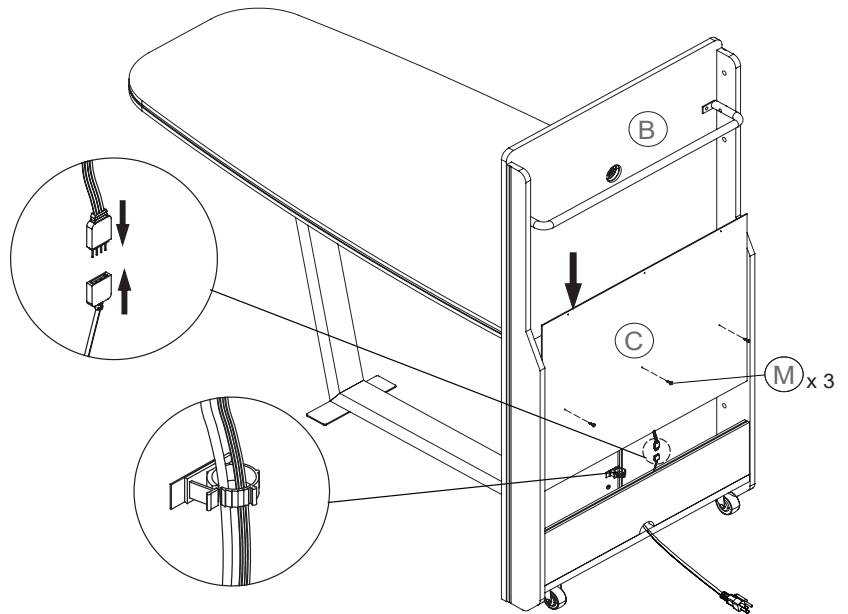

Remote Control

- Aim the remote control directly at the LED strip.
- If remote control does not initially control the LED strip, hold the ON key down for 5 seconds to pair. The light strip flashes slowly to indicate successful pairing.

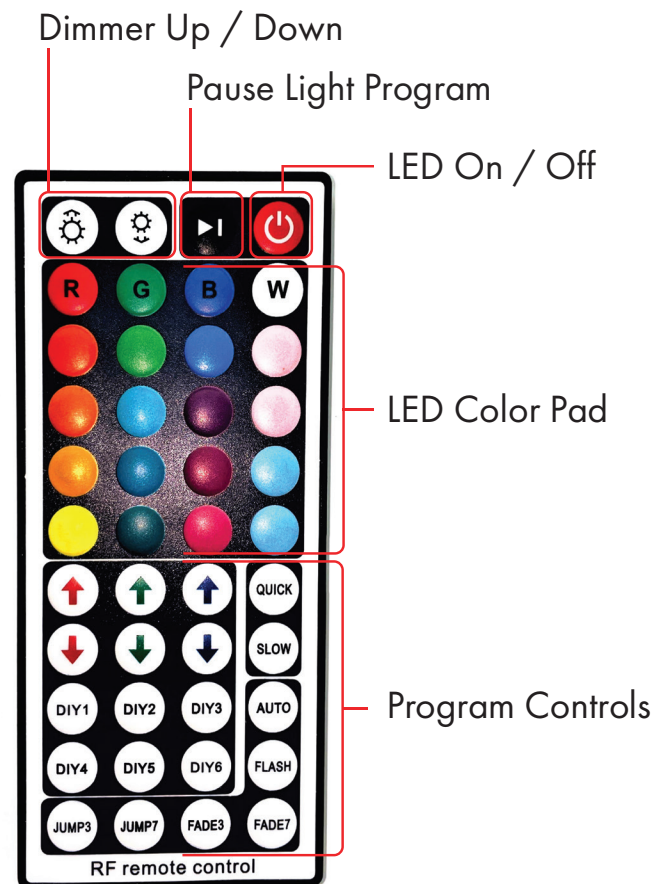

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.