

Floor-Standing Charging Station with Graphics

Assembly Instructions

SKU: FLCHG8GCM

Charging Station with Custom Graphics

SKU: FLCHG8GS2

Charging Station with Stock Graphics

Scan the QR
code to visit the
product page.



Safety Information

Before beginning assembly, please read through the instructions and understand each step thoroughly. Displays2go is not responsible for any personal injury or product damage due to mishandling, incorrect assembly or incorrect use of this product.

Ensure power cords are safely located where they will not pose a tripping hazard. Always disconnect the unit from power during disassembly or transport.

2 people are recommended for assembly.


Components

PART	QUANTITY
A. Charging Station Body	1
B. Front Panel	1
C. Base.....	1
D. Support Pole	2
E. Power Hub	1
F. Power Adaptor	1
G. USB Charging Cable	4
H. 8-Pin Charging Cable.....	4
I. Acrylic Device Pocket	6
J. Acrylic Wide Device Pocket.....	1
K. Acrylic Literature Holder	1
L. Acrylic Sign Header	1
M. Key	2
N. Hex Screw	4
O. Washer.....	4
P. Hex Wrench.....	1
Q. Standoff Cap	4
R. Standoff Bolt.....	2
S. Wood Screws.....	3


Tools Needed: Screwdriver.

Assembly



1. Connect each pole to the base with a screw and washer.

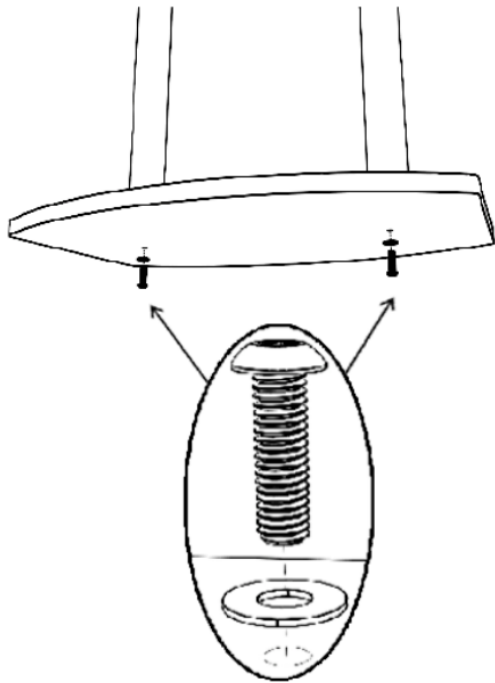


2. Set the charging station body onto the poles. Use a screw and washer to secure to each pole.

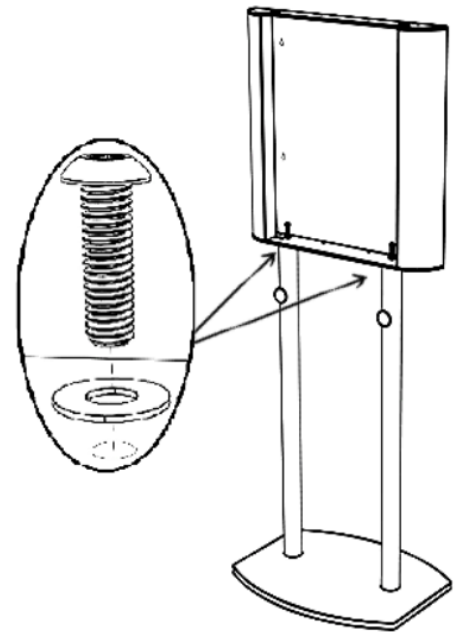


3. Run the power cable through the opening on the back of the unit and plug into the power hub.

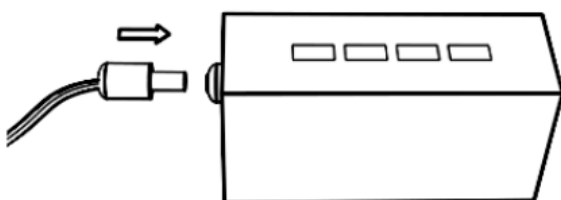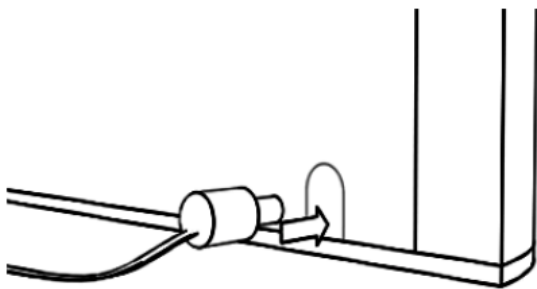


4. Feed the charging cables through the slots on the front panel.

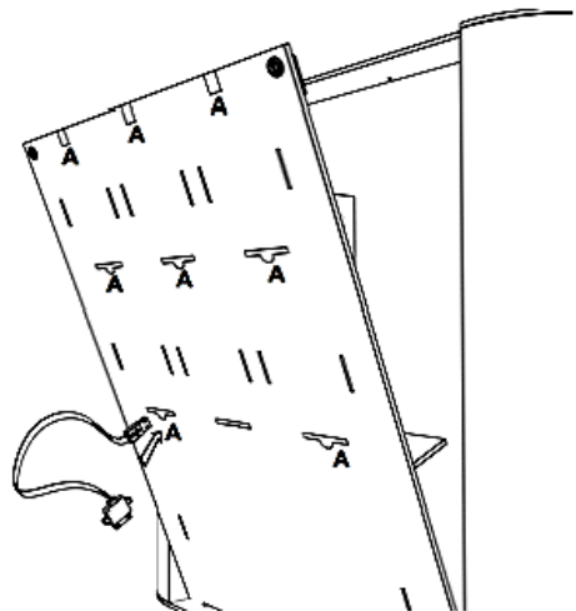


5. Plug all cables into the power hub and arrange the cords neatly inside the charging station.

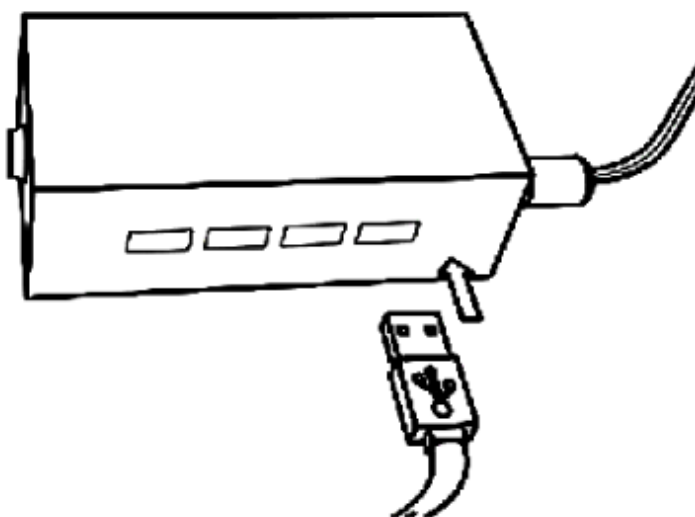


6. Set the front panel into place and lock both sides with the keys.

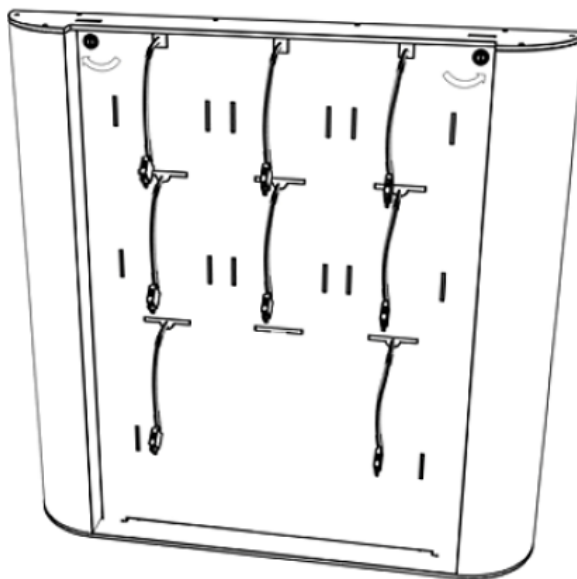


7. Add all acrylic pockets by sliding the hooked tabs into the slots until the pocket snaps into place.

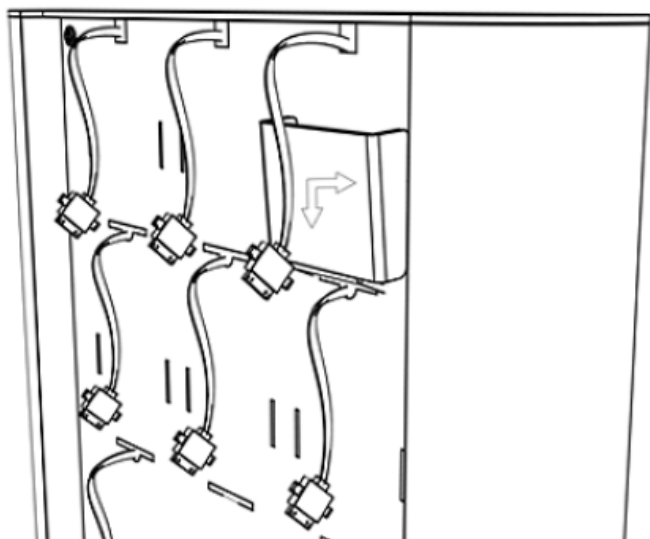


8. Insert a standoff bolt through each leg. Place the literature holder onto the bolts, then twist standoff caps onto both ends of the bolt to secure.

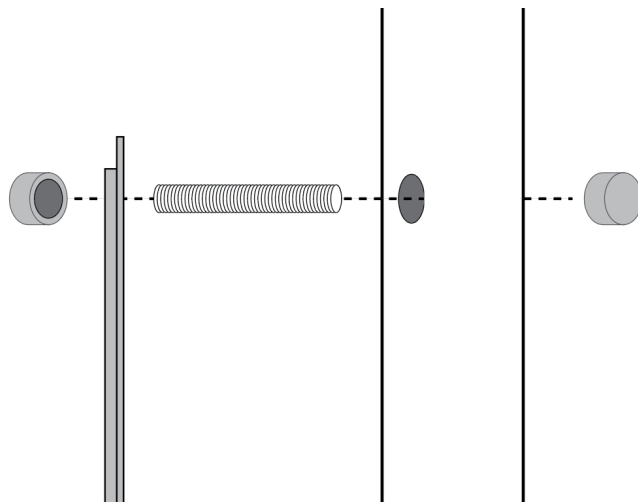

9. Drive wood screws through the acrylic header into the wood backing.

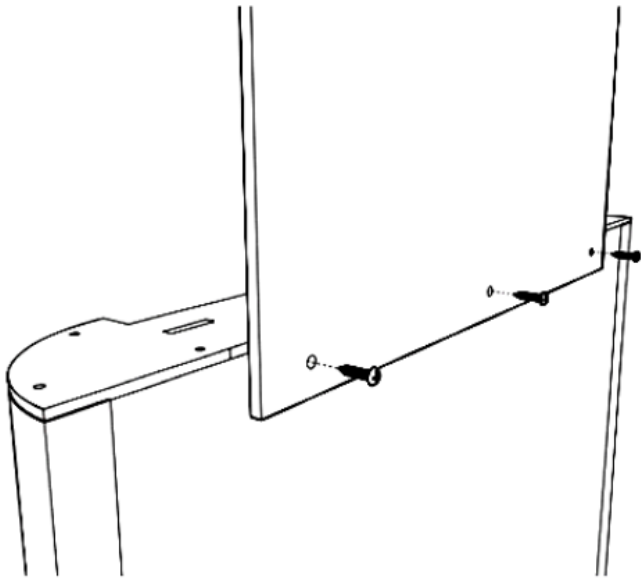

10. Plug the power cord into an outlet.

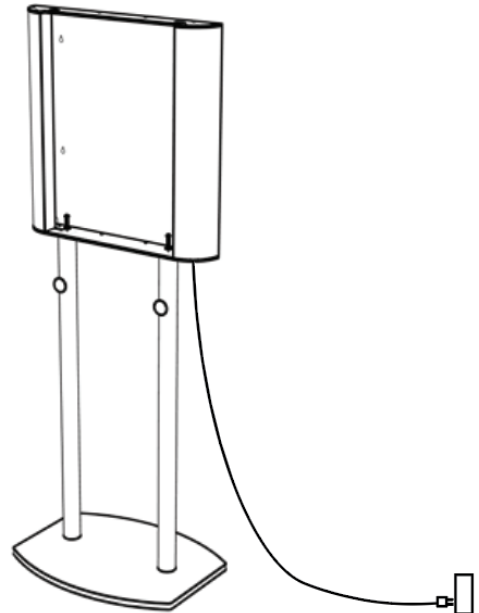

Assembly is complete.

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.