
DISPLAYS2GO


Assembly:

1

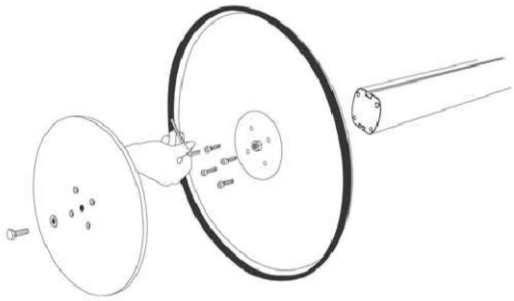


1.Connect the pole set, base and weight piece as in the diagram

2




2.Remove the pole cap.

3

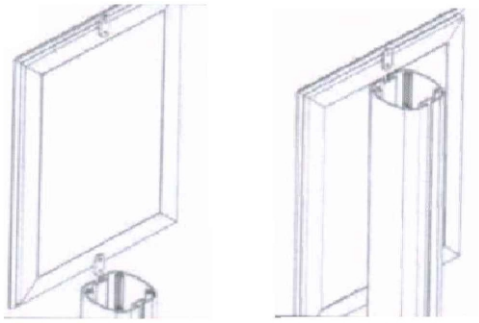


3.Slide the (4) connecting plates on the back of (2) snap frames into the grooves of pole set and adjust to desired height

4



4.Open the upper covers of the horizontal sides; Tighten the Screws on the tops and bottoms of the frames.

5

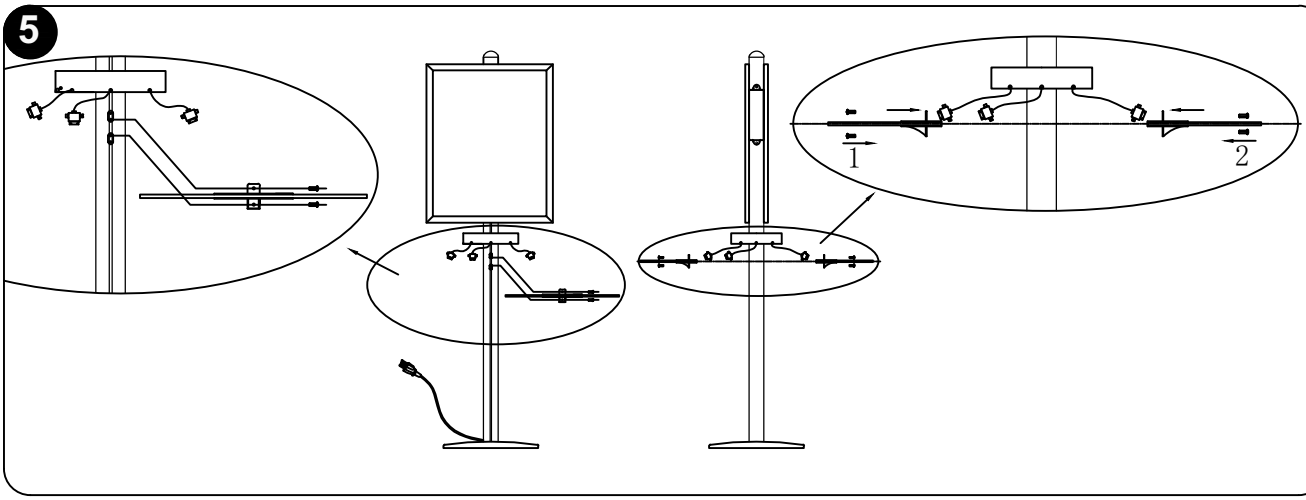

5.Attache the acrylic tops to the connecting plates in the grooves with screws

Double Sided Charging Station Instruction

Product Description:

Ⅰ.Specifications:


1.Input：100-240VAC，50/60Hz 1.4A

2.Output：5VDC Max.: 2.1A

Includes:

(2) MFI Lightning Charging Cables,

(4) Type-Charging Cables

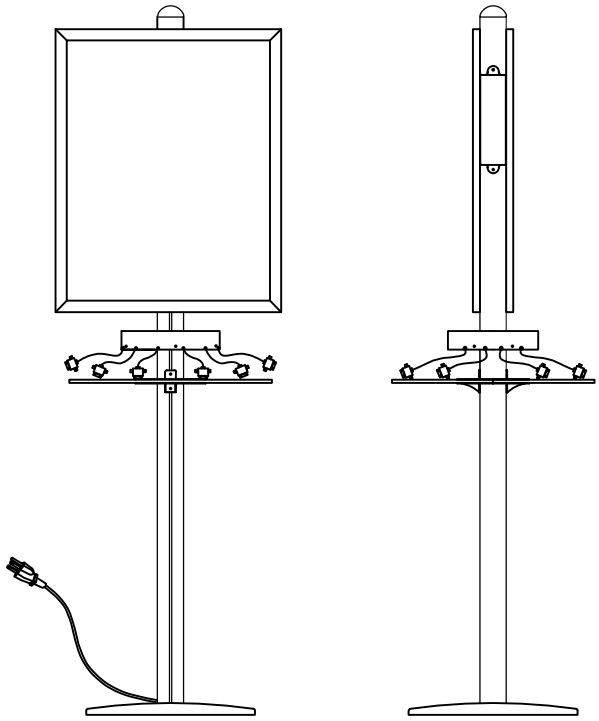

Ⅱ.Compatible devices:

Android devices, iPhone, iPad.

Ⅲ.Working Environment:

1.Working Temperature :-10～40℃;indoor use only

2.Storage Temperature: -25～60℃

3.Charging: one device at a time per cable port

Parts:

1	Snap frame	2
2	Pole Set with charging device	1
3	Acrylic top with flange	2
4	Pan head screw	4
5	Base	1
6	Hex socket screw	4
7	Wrench	1
8	Weight piece	1
9	Hex bolt	1

