

ECO CORK STANDOFF SIGNAGE





Assembly Instructions

DISPLAYS2GO

INECTING PEOPLE & BRANDS WITH THE WORLD






ECOSOC66

ECOSOC8511


PARTS LIST

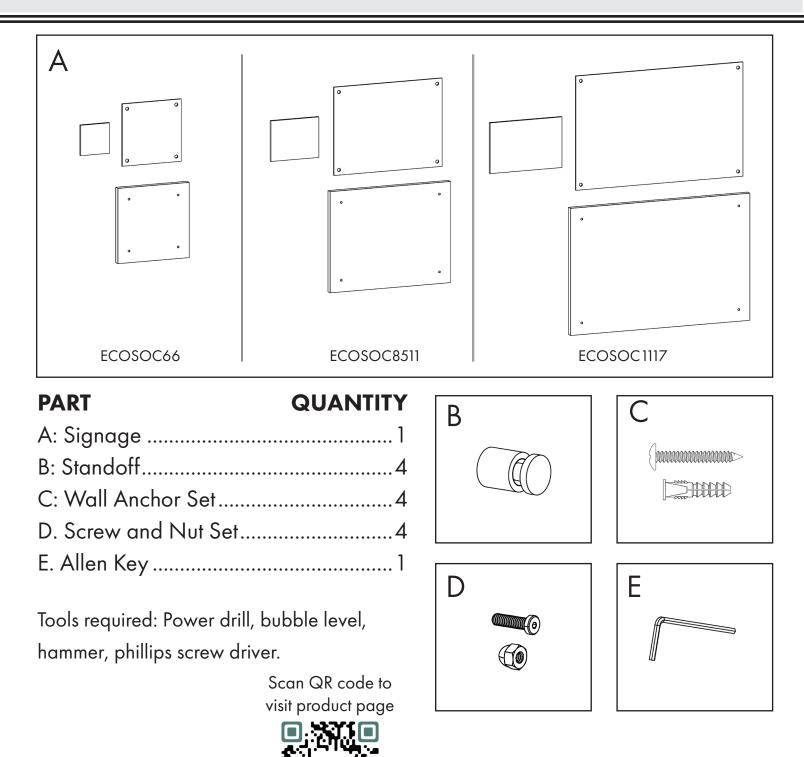


If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.

Wall Mounting


1. Place your acrylic signage against the wall and make sure the signage is level on the wall. Hold the signage and mark the the center of each hole on the wall. Remove the acrylic signage and drill holes at the marked locations.

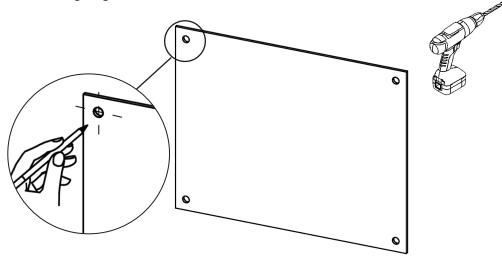

2. Insert wall anchors into drilled holes and gently tap each anchor into the wall with a hammer until it's flush with the wall. Attach the cork backer to the wall and use anchor screws to fix standoff bases.

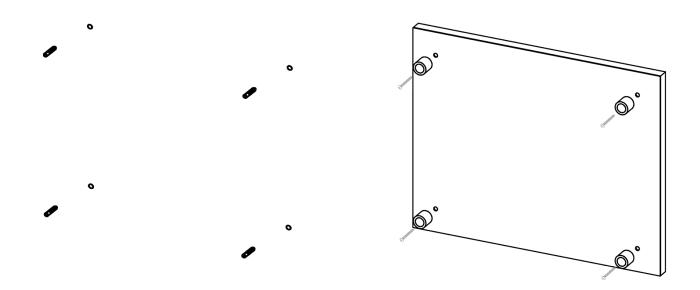


3. Attach the printed signage to standoff bases and replace the standoff caps to secure the sigange. The assembly is finished.

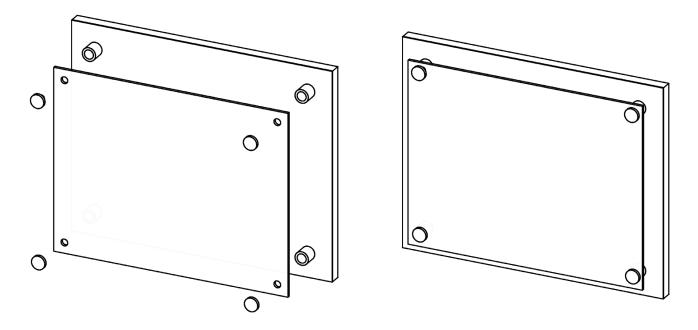


Tabletop Display


1. Use the cap nut and screw sets to fix standoff bases to the cork backer. Tighten all screws with the allen key provided.

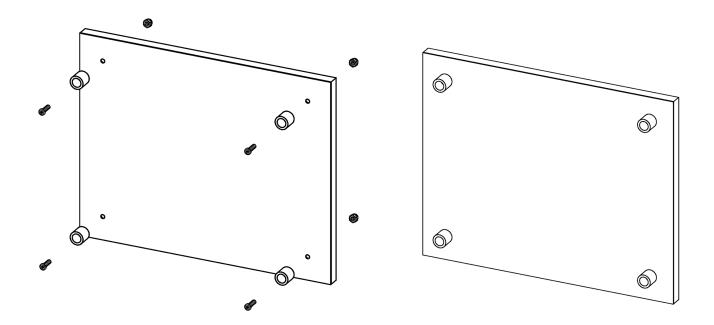

2. Align holes on the printed acrylic with standoff bases, use standoff caps to fix your signage to the cork backer.

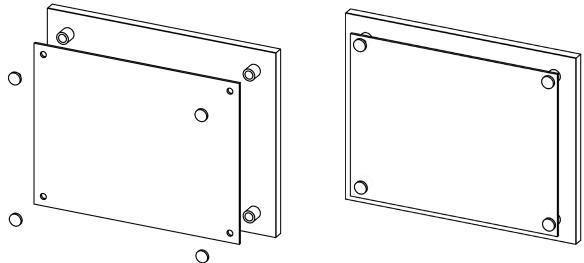

3. Choose either protrait or landscape display and insert the acrylic support into the appropriate back slot.

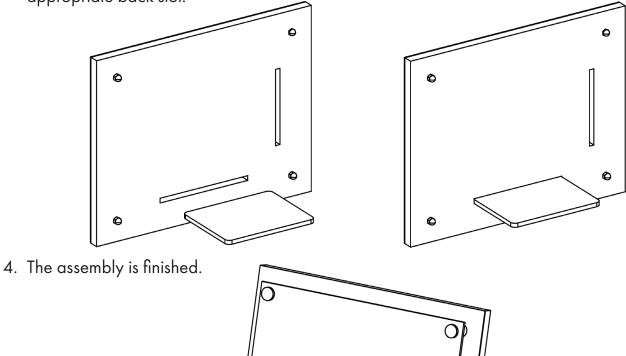

CONTACT INFORMATION: www.displays2go.com PHONE: 844-221-3388