



Meeting Forward Reach Guidelines:

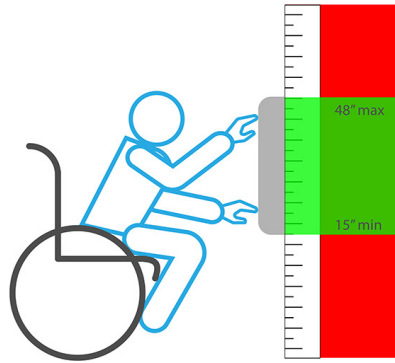


Forward Reach Guidelines

If a kiosk is designed to be accessed via a forward reach and has no obstructions (such as a countertop), the highest touch point of the screen must not exceed 48" and the lowest touch point must be no less than 15".

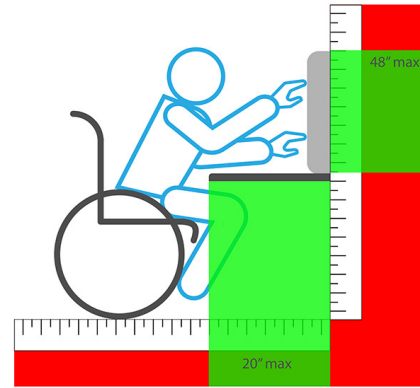

Obstructions Less Than 20 in


For kiosks with obstructions such as a countertop that do not exceed 20" in depth, the highest touch may not exceed 48". The floor space directly under the obstruction must be kept clear.

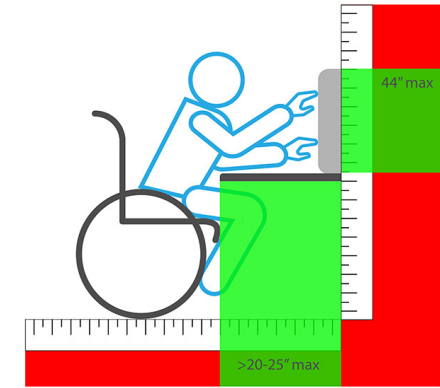

Obstructions Greater Than 20 in


Obstructions may not exceed 25" in depth. When obstructions are between 20-25" in depth, the highest touch point may not exceed 44". The floor space directly under the obstruction must be kept clear.

Meeting Side Reach Guidelines:

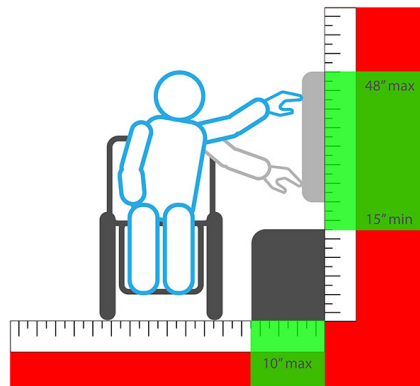


Side Reach Guidelines

If the only way to approach a kiosk is with a side approach and the kiosk has no obstructions, the highest touch point may not exceed 48" and the minimum touch point must be no less than 15".

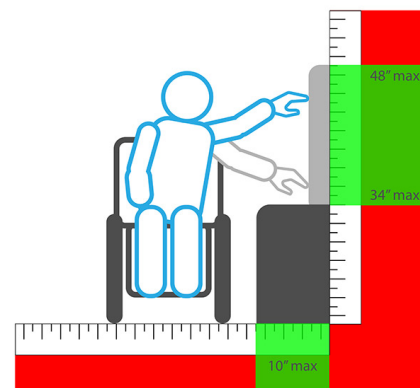

Obstructions Less Than 20 in

For obstructions that do not exceed 10" in depth, the height of the obstruction must not exceed 34" and the highest touch point must not exceed 48".

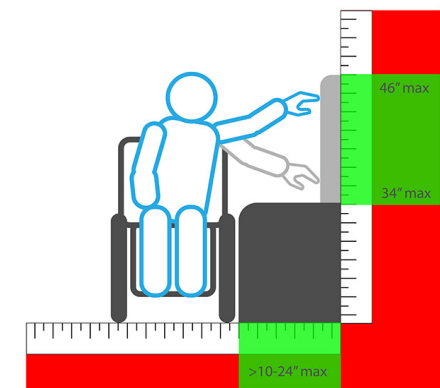

Obstructions Greater Than 20 in

Obstructions must have no more than a 24" depth. When obstructions fall between 10"-24" in depth, the maximum height of the obstruction must not exceed 34" and the highest touch point must not exceed 46".