


Instruction sheet -- VTI Flat panel TV cart

Model number: FPCAB4226E

Congratulations for having chosen this excellent VTI product.

To assure your complete satisfaction, this product is warranted against defect in manufacture for one years after the purchase date. Any parts requiring replacement during the 1--year period, under normal use and service, as a result of defective workmanship, will be replaced by VTI or by an authorized VTI dealer, without cost, except for transportation charges. All unit should be returnd in original packing, to guarantee safe transport. VTI is not responsible for damage in shipment. If you have any questions regarding the assembly of your table, please call the VTI helpline at (626)575-1860.

Note: This unit is easier to assemble with two people.

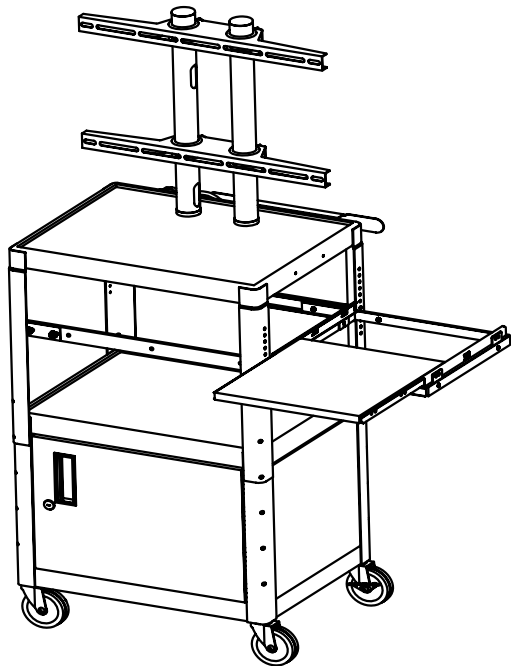

FPCAB4226E

Parts list

Qty.	Description	Qty.	Description
1	Top shelf section	9 Set	Phillips head bolt, washer and hex nut(I)
1	Bottom shelf section	2	Casters with brakes
2	Poles for supporting flat panel TV	2	Casters without brakes
2	Horizontal mount	2	Hex head screws for mounting the poles(F)
1	Electrical bracket	1	Hex head screw (G)
1	Power cord	1	Hex head screw (H)
3	Screws and hex nuts(E)	1 Set	Side extended pull out shelf
1	Cart handle (Optional)		



Pole



Horizontal mount


Screw table

Some screws may have already been screwed on the related parts.


A		M4*12	F		M8*20 (On the pole)
B		M5*12	G		M10*20 (On the top horizontal mount)
C		M6*12	H		M10*20 (On the bottom horizontal mount)
D		M8*16	I		M6*16
E		M5*45			

Tools required

Hex wrench (provided)
Allen key (provided)
Adjustable wrench/pliers
Rubber mallet

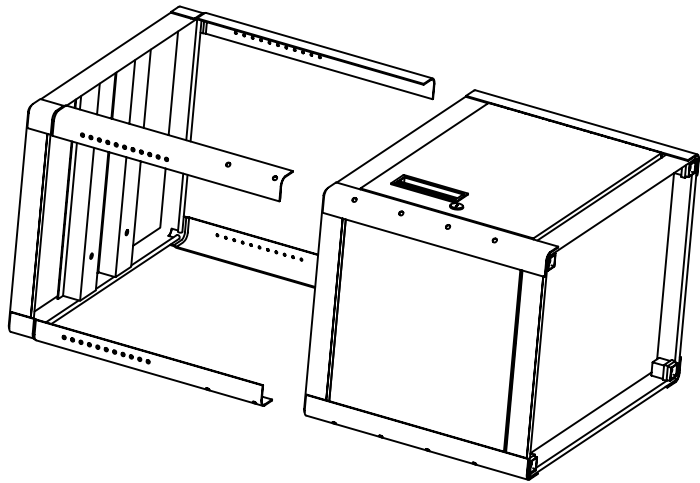


1. Insert top table section onto bottom section.

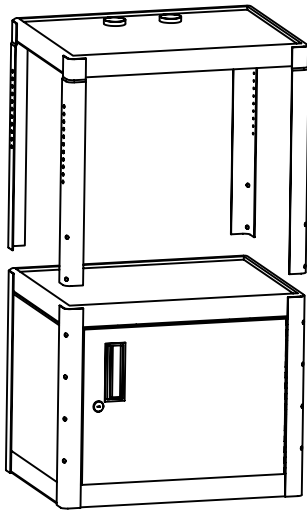


Desired Unit Height	Use These Corresponding Holes
26"	1 & D
30"	1 & C or 2 & D
34"	1 & B or 2 & C
38"	1 & A or 2 & B
42"	2 & A

2. Align corresponding holes of unit to obtain desired height of table as needed..

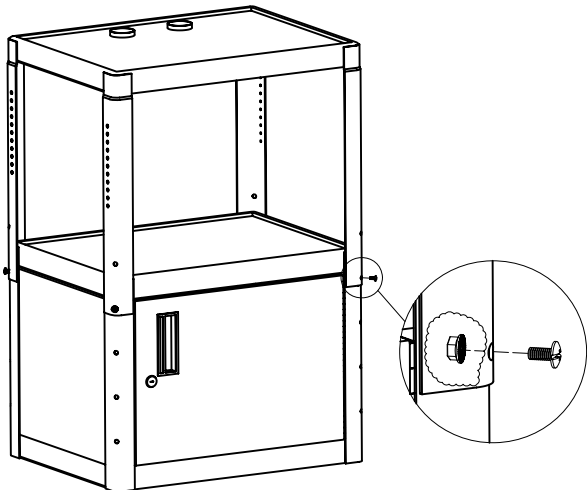


3. Insert two bolts, washer and nuts(see screw table I) into each leg of table. Washer should be on the inside of leg. Tighten all bolts and nuts.


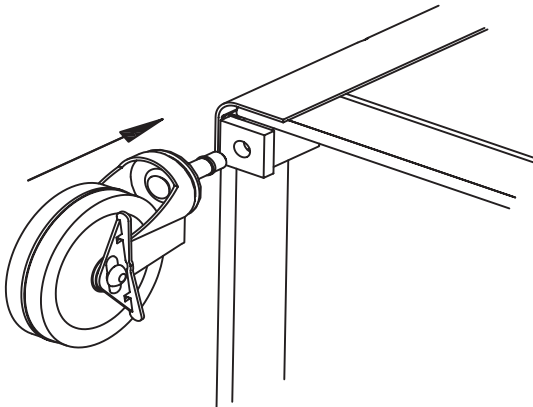


4. Lay unit on floor . Insert casters with brakes into opposite corner holes in the bottom of the unit. Insert other casters into remaining holes of unit.


5.
Insert the two supporting poles onto the holes on top shelf. Wire holes can face inside or outside.

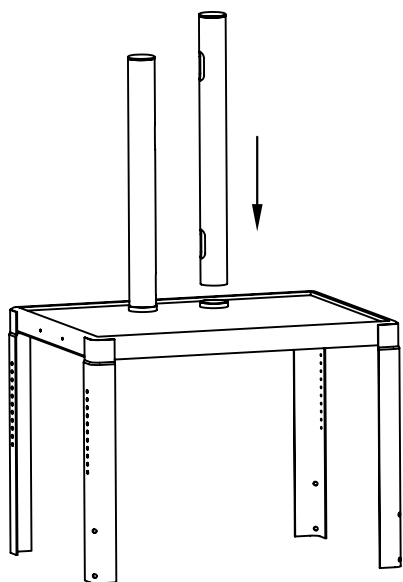


6.
Insert the two horizontal mounts onto the supporting poles. Note: The mount with adjustable screw (see screw table H) should go on the bottom. Screw (see screw table G) the top mount to desired height from A to F. Adjust the bottom mount height according to the TV screw position as shown.

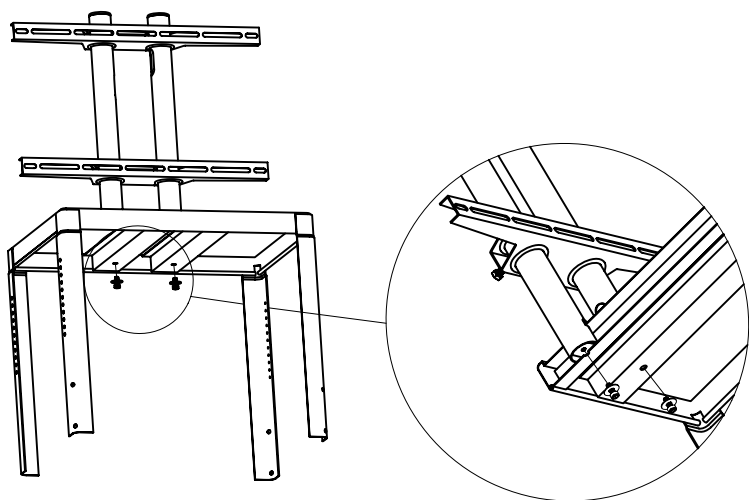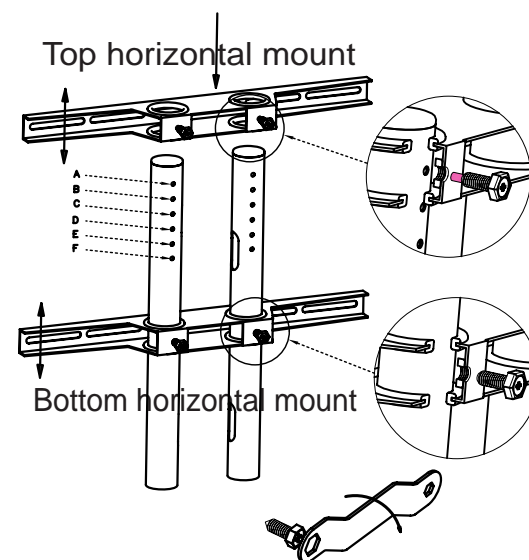


7.
Tighten the two supporting poles onto the top shelf with two hex head screws (see screw table F) as shown.

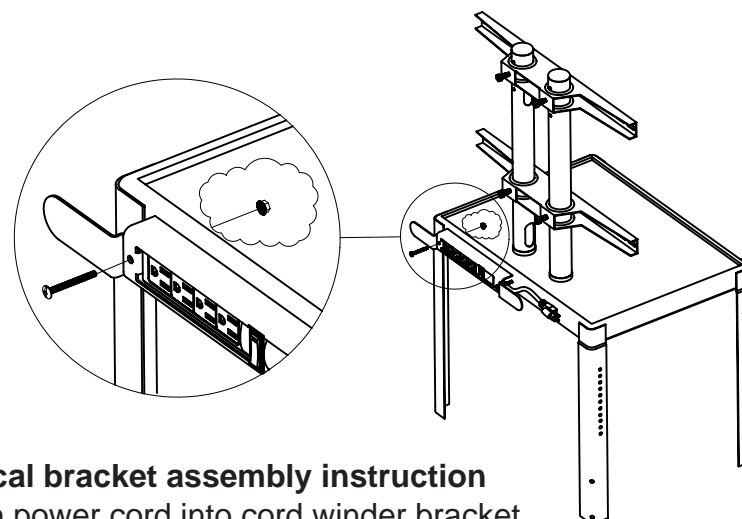


8.
Electrical bracket assembly instruction
A. Push power cord into cord winder bracket.
B. Attach electrical bracket to back side of top shelf with two nuts and bolts (see screw table E). Tighten nuts and bolts securely. Wrap power cord around wings of the bracket.

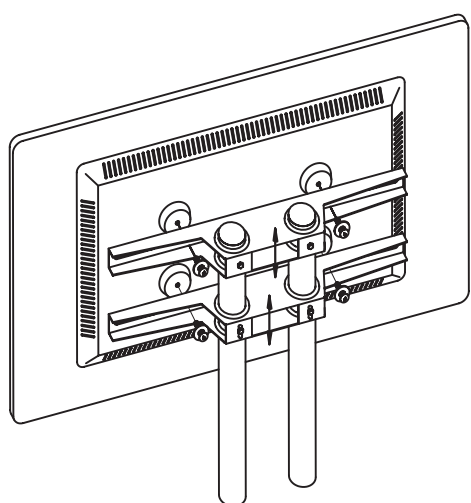

9.
Use the appropriate bolts needed (M4, M5, M6 or M8, see screw table A, B, C or D) to fasten the flat panel TV onto the horizontal mounts as shown.

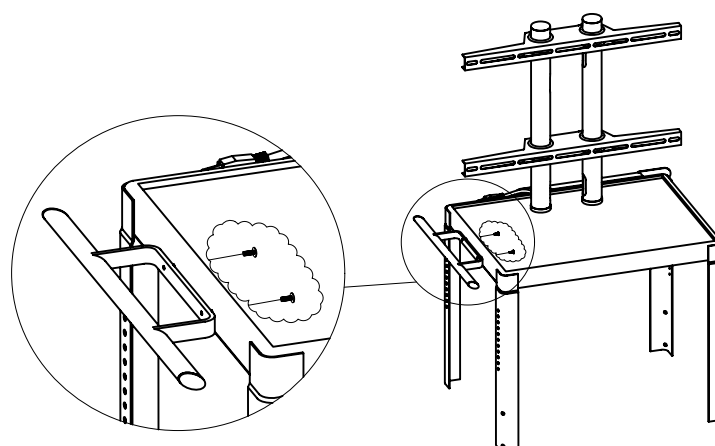


10.
Handle assembly Instruction (Optional for cart handle)
A. Unscrew the screws from the handle.
B. Attach the handle to the top shelf (either side) and tighten handle to the shelf with screws from the inside under the shelf as shown.

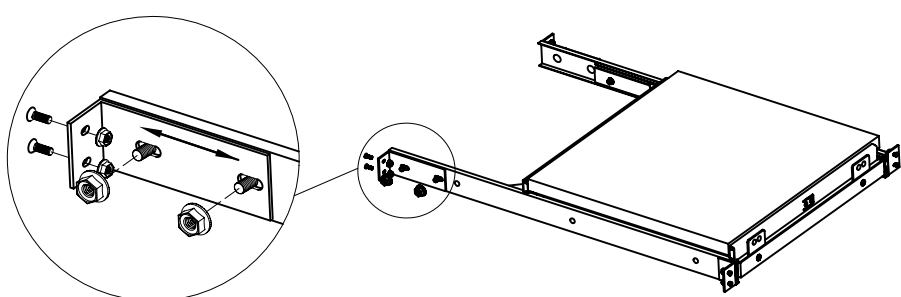

Side extended pull out shelf assembly instruction

- A.
Due to limited packaging space, pull-out shelf was shorten. Adjust the pull-out shelf out to the maximum inside width of the cart inside as the pull-out shelf will be installed inside of the legs.

- B.
Tighten the pull out shelf onto leg on both side as shown.

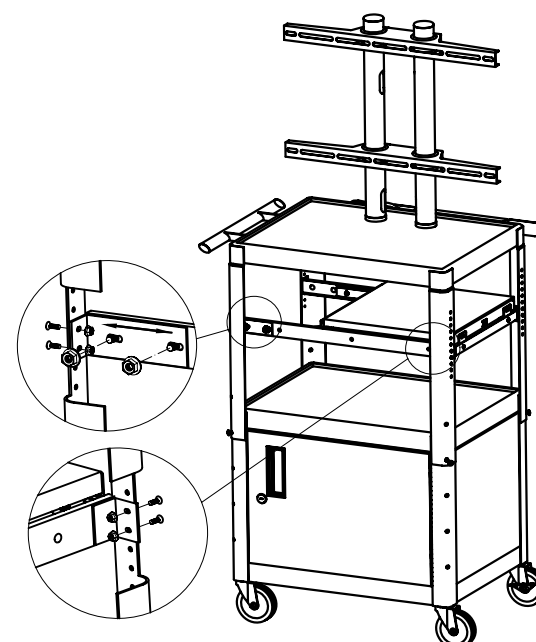





Instruction sheet -- **VTI** Security drawer for 4226 series

Model number: DRW4226


Note: This unit is easier to assemble with two people.

Before Installing the security drawer, you have to fully assemble the unit to its' desired height (Model number: MFC4226E, MFCAB4226E, FDC4226E or FDCAB4226E).


Screw table

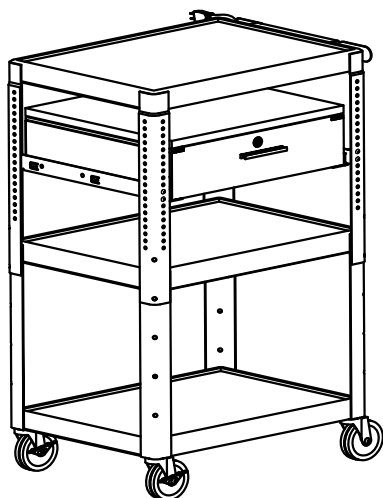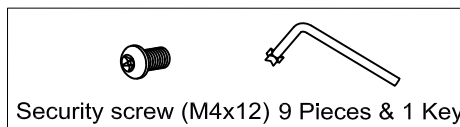


MFC4226E with security drawer

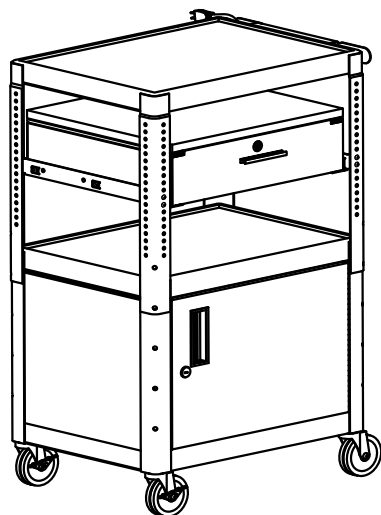

MFCAB4226E with security drawer

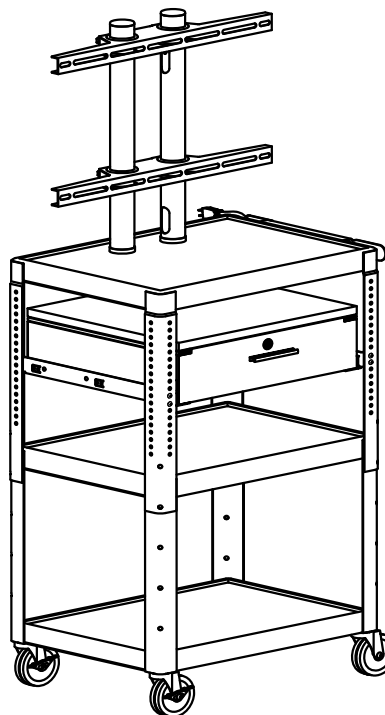


FDC4226E

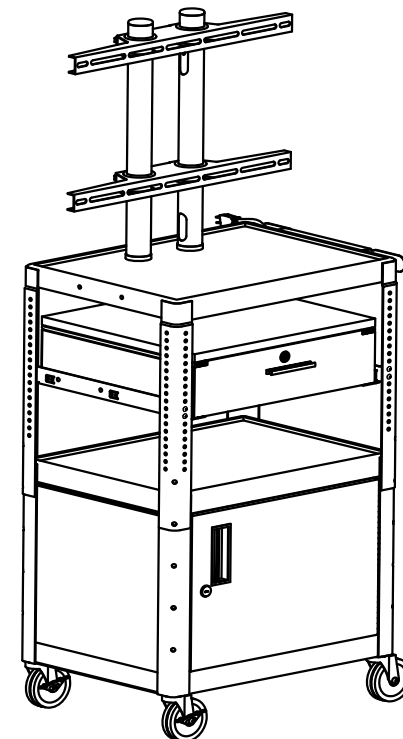

FDCAB4226E



(Instructions continued on next page)

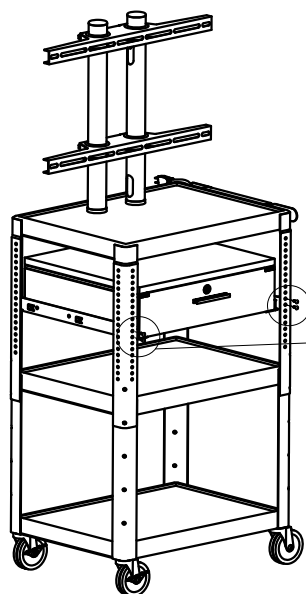


1. After the cart is fully assembled to the desired height, install the drawer to the cart with 2 security screws on each side / pole as shown.

Note: Pull out shelf on top of the drawer can be pulled out to the front along with the drawer or pulled out to the back by itself with the drawer inside the cart.

2. To restore the drawer back under the cart, press down the locking mechanism (to ensure the drawer stay in place when pulled out) on each side as shown.

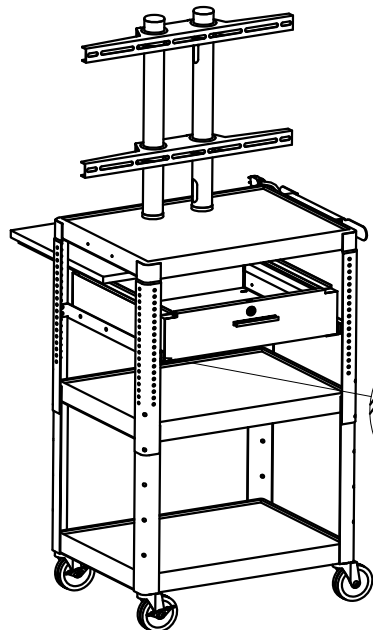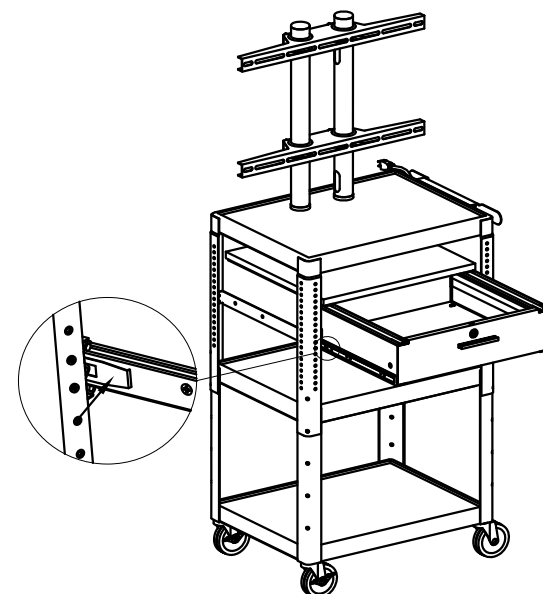

3. To make sure the drawer is secured to the cart, before locking the drawer, slide the pull out shelf to the back, lock the drawer to the side of the cart as shown.

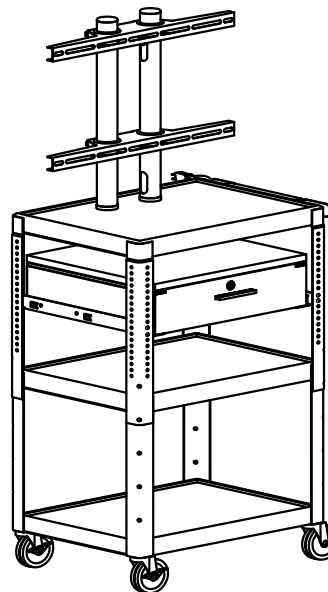

4. Restore the pull out shelf back under the cart, lock the drawer.