

BOLLARD SIGNAGE

Model: OP916BOLSG, OP1012BOLSG


Required for assembly: Flat-head screwdriver




DISPLAYS2GO

NOTE: Styrene Insert is removable.
Permanent aluminum message insert is not removable.


Scan QR code to visit
the product page

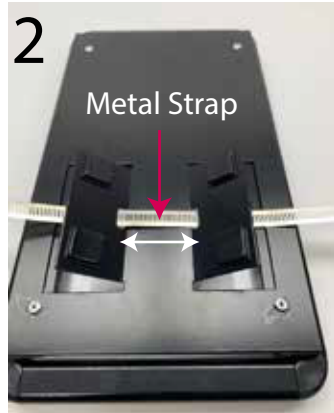

1. Turn metal frame over and locate the two slots on the back.
2. Feed metal strap through the two slots.
3. Feed end of strap through screw slot to form a circle. DO NOT TIGHTEN.

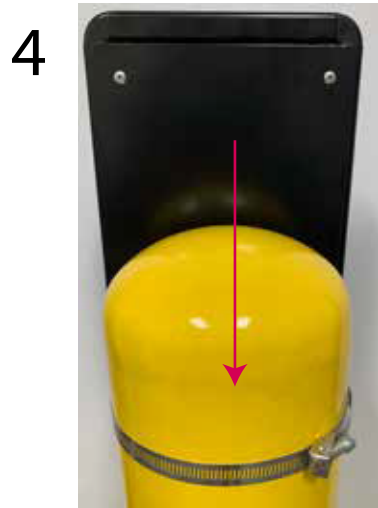

4. Slip circular metal strap with metal frame around bollard pole.
5. Position bollard topper frame so that it is above the top of pole, as shown.

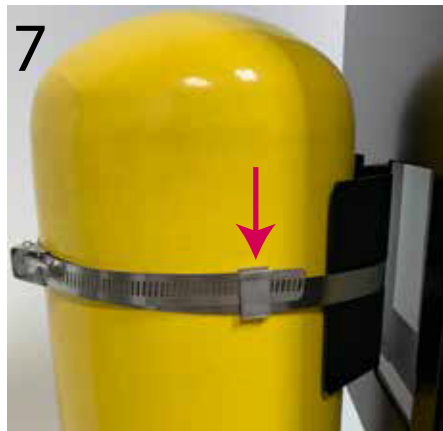

6. Tighten screw with flat-head screwdriver.
7. Secure excess metal strap into metal clip, as shown.



If the device is not functioning properly or if you have questions about operating the device, please call our Customer Service Department at 1-844-221-3388.