

- Holds two 22" x 28" signs
- Change signs in seconds
 - "Quick-Change"™ feature, signs easily slide in and out
 - use Coroplast™ signs or other material 3/16" or less

NEW • "Stay Tabs" assure sign stays securely in place

NEW • Grabber Hinges hold a Sign Rider

- keep frame from opening too far

NEW • Textured feet

- help to secure frame on smooth surfaces
- dig into soft ground or gravel

NEW • Available in white and black

NEW • Internally ballast with up to 6 lbs. of dry sand

- Stabilizing brace prevents accidental spreading or closing of the sign faces



"Stay Tabs" keep sign securely in place




Grabber Hinges grip Sign Rider, quickly holding it in place



Patented slot design
- just slide in a sign
or a message board
or a marker board

Holds 22"W x 28"H Sign Blanks


Sign Blank Size: 22"W x 28"H
 Outside Dimensions: 24.375"W x 37.25"H
 Closed Thickness: 2"
 Weight: 9.8 lbs.
 Colors: White and Black
 Can use all sign blanks up to 3/16" thick, including Coroplast[®], foamboard, and aluminum.

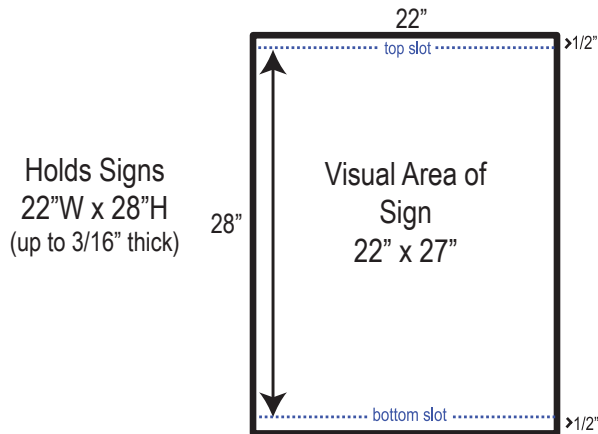


Holds Signs
 22"W x 28"H
 (up to 3/16" thick)

Visual Area of
 Sign
 22" x 27"


Sign Insertion Instructions:




1. Slide sign down through the tabs



2. Slide through, pulling sign in front of bottom slot until sign hits the ground



3. Push sign up into top slot




4. Slide sign down into bottom slot

Sign Rider Insertion Instructions:


Stand the sign frame on the ground, spreading open the sign faces only half way. Place the Sign Rider in the hinge openings between the sign faces. Now, move the sign faces apart until fully extended. The hinges will "grab" the Sign Rider.



Stabilizing Brace Instructions




Brace in storage
 (back side)




Place brace in holes at bottom of
 the sign frame to use

Prevents accidental or intentional spreading of sign faces too far. Can also be used for sandbagging. To store, just click into receptacle on back of sign frame.



Brace in use

Sand Ballasting Instructions



Sand Fill Hole

Each sign frame has two fill holes, one on each half of the frame.

Remove plug from fill hole and fill each hole with dry sand. 3 lbs. of sand per hole for a total of 6 lbs. per sign frame is recommended.