

# MOBILE TV STAND WITH SHELF

Assembly Instructions

SKU: EM6580BK

EM6580BK --

## **Table of Contents**

Table of Contents and Warning	2/12
Parts list	3/12
Assembly and Installation	
1. Poles assembly to base installation ·····	4/12
2. Telescopic mounting poles installation · · · · · · · · · · · · · · · · · · ·	5/12
3. AV shelf installation	6/12
4. Interface installation	7/12
5. VESA mounting patterns	8/12
6. Selection of TV mounting patterns	9/12
7. Mounting TV on poles interface 1	0/12
8. Video tray installation1	1/12
9. Cables and wires installation1	2/12


### **WARNING!**


Severe personal injury and property damage can result from improper installation or assembly. Read the following warning carefully before beginning.


- If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.
- •Do not install or assemble if the product or hardware is damaged or missing,
- if you require replacement parts, please contact your local distributor for assistance.

  This product fits most 55"-80" LCD/plasma screen; maximum weight of LCD/plasma screen:200lbs/90.9kg;AV shelf max load:25lbs/11.4kg;Video tray max load:10lbs/4.5kg.
- Do not use this product for anything other than the original design.
- This product contains moving parts, please use with caution.
- The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of, or inability to use, the product.
- ► All images are for reference, to prevail in product.

### Manual



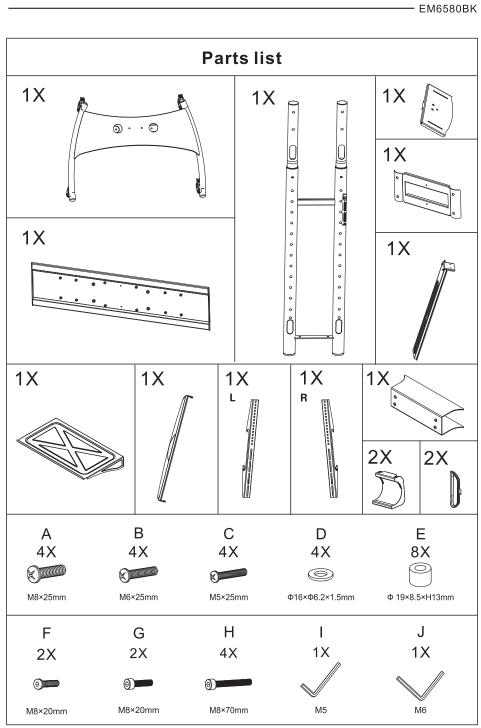

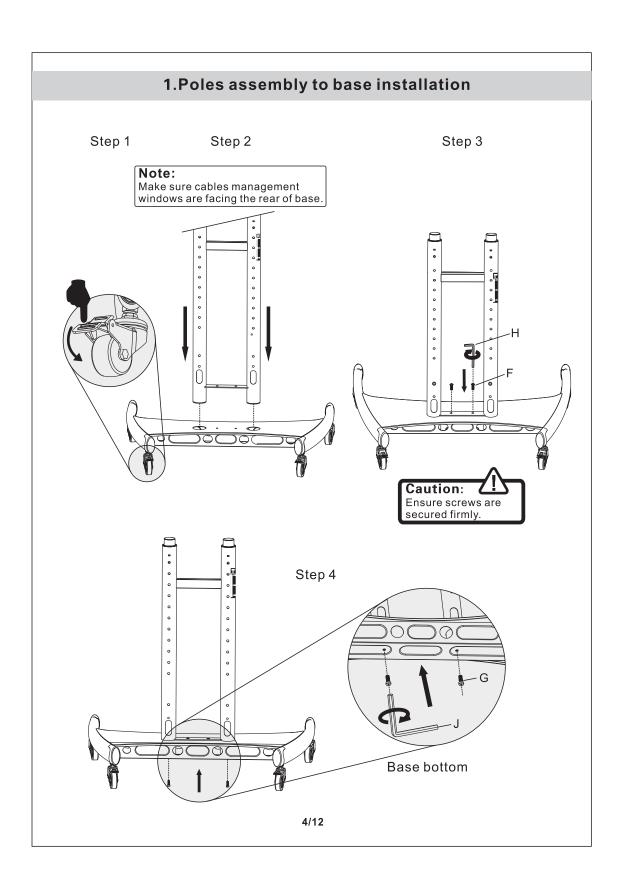

# 2. Telescopic mounting poles installation

- Step 1.Unscrew safety cap screw on right lower poles assembly by using J (6mm Allen key) from hardware pouch. Put safety cap screws aside. As shown in Fig-1
- Step 2.Use left hand thumb or index finger to depress spring ball located at the right lower pole(Near cable winder), at the same time use right hand twist and pull right upper pole (Clockwise or anti-clockwise either directions will do) upward until your desired height. Use height label indicator on pole as guide. Then twist upper pole toward plunger holes direction and engaged sping ball into the plunger hole and set. Secure safety cap screw firmly as shown in Fig-2 (You may need another peroson to help)
- Step 3. Repeat step 2 on left poles assembly.
- Step 4.To re-set height after TV installed, need 2 men. One man to hold up the TV while their man simple unscrew 2X sefety screws on left and right poles by using J (6mm Allen key) from hardware pouch and put screws aside. Using both thumbs to depress the 2 spring balls, and TV man let goes TV downward or rise up to desire height and let plunger ball set into holes. Secure 2X sefety screws firmly. As shown in fig-2......

