


Set-up



Unpack the frame from the bag with backer sided toward floor. **1**

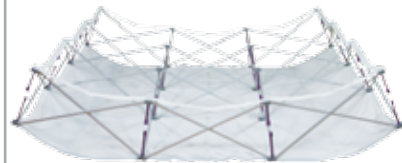

Stretch out the frame so it lays flat on the floor. **2**



Lock connecting arms into place. **3**




Apply three lights per quad to the velcro on the back graphic. **4**



Using the small connecting cords, chain each of the lights per quad to one another. **5**



Once finished, apply the long connector to chain the lights, one connecting to the bottom light on the opposing quad and the other to the top light. **6**

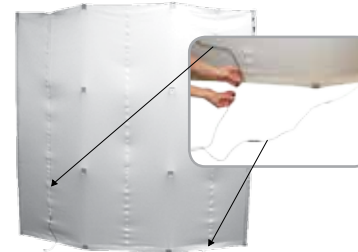

For 3x3 units the long connector with female connection will hang behind the defuser panel. For 4x3 units the long connector with female connection will lay on the floor. *See diagram. **7**



Plug in lights and test light output, be sure that all lighting is working properly. If not, check the connectivity between the lights and be sure everything is snugly connected. **8**



Apply graphic to the frame, the end caps do not have to be immediately applied. **9**




Stand up the frame and replug the two female connectors into the power supply, verify all the lights work. **10**




Apply the end cap by wrapping it to the back Velcro and secure the end caps. **11**


2x2 light diagram

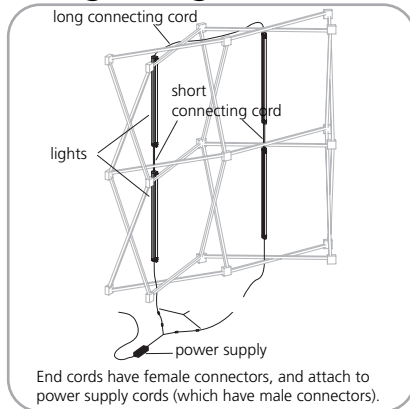

3x3 light diagram

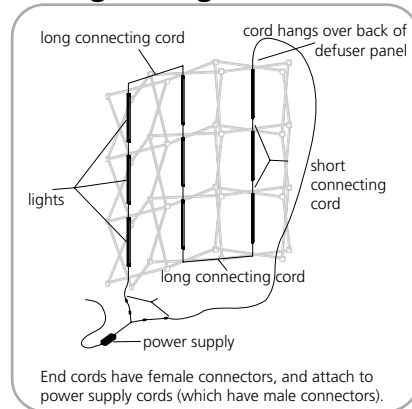


4x3 light diagram

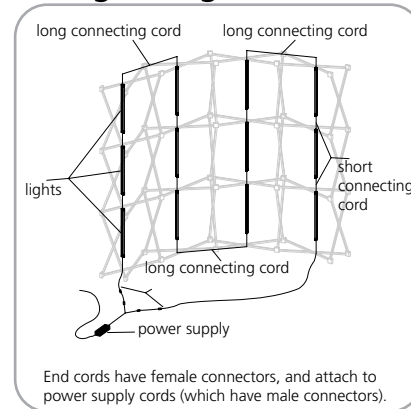

to ensure quality, please note:



If the webbing is wrapped around the purple locking arm, the arm can snap off when opening the unit.




When setting up, ensure that the arms are aligned. If not, the arms will snap when pressure is applied.




When packing unit in the bag, ensure that the strap is not partially wrapped around an arm. If it is, the arm will snap when pulled out of the bag.




Do not use the purple locking arm to lift unit. ALWAYS lift by the frame.




To detach the female arm, remove the screw, steel plate and velcro webbing. Pull the arm off the hub.



Attach the female arm by popping it into the hub. Fasten the screw through the steel plate hole and the velcro webbing tapping into the female arm.



To detach the male arm, pull the arm off the hub.



Simply pop in the male arm into the hub.



Both arms should align to snap lock together.