

1. After changing batteries or refilling the container, press down on the battery cover firmly and make sure the clips are fully attached to the battery compartment.



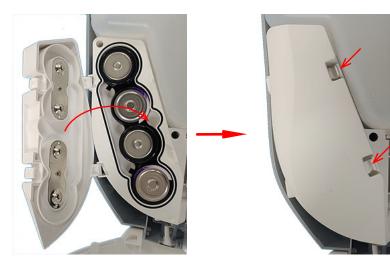

2. Before replacing the liquid container, extend the highlighted bracket to the bottom. The bracket must be sandwiched in between 2 round plates on the dispensing stem.

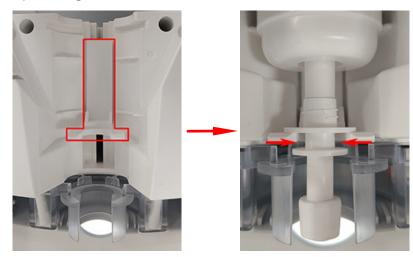

If you have any questions regarding our products, please visit us at www.displays2go.com or contact D2G customer service 844-221-3388.

DISPLAYS2GO