







PARTS		
A	Top Panel	1pc
B	Side Panel	2pcs
C	Bottom Panel	1pc
D	Back Panel	1pc
F	Toe Kick Panel	1pc
G	Swing Door	1pc
g	"THANK YOU" Flip Door	1pc
H	Divider Panel	1pc


HARDWARE			
H1	Cam Lock	30pcs	
H2	Cam Post	30pcs	
H3	Wood Screw	12pcs	
H4	Concealed Hinge	2pcs	
H5	Tray Rail	3pcs	
H6	Screw	6pcs	

ATTENTION: Unpack the unit and confirm all hardware are present. If any hardware required is missing, or if you have any questions regarding our products, please contact D2G customer service.


Assemble the unit on a carpeted floor or on a soft surface work area to avoid any scratch.

A phillips screw driver is needed. 2 people recommended.


1. Insert 2 cam posts (H2) into holes in Panel C. Tighten only until snug. Fit cam holes in the edge of Panel F over the cam posts. Insert 2 cam locks (H1) into cam lock holes on Panel F, use a phillips screw driver to turn cam locks clockwise to secure cam posts. DO NOT over-tighten.

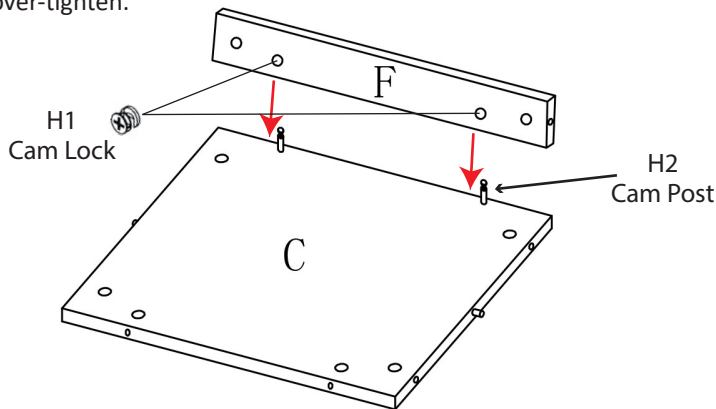


2. Insert 2 cam posts into holes in Panel D as shown below. Attach assembled Panel C to Panel D by inserting cam posts into the cam lock holes. Insert 2 cam locks into cam lock holes on Panel C, turn cam locks clockwise with a phillips screw driver to secure cam posts.

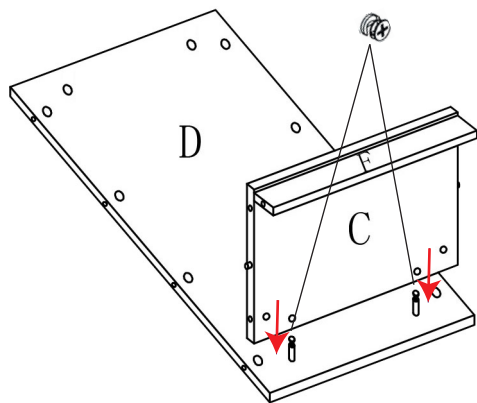


3. Insert 9 cam posts into holes in Panel B as shown below. Attach the assembled panels in STEP 2 to Panel B and use cam locks to securely lock it in place.

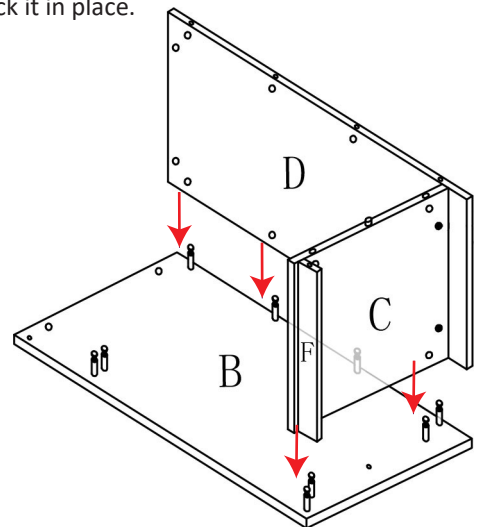


4. Assemble Panel H by fitting cam lock holes in Panel H with 2 cam posts. Lock Panel H securely by inserting cam locks and rotating clockwise.

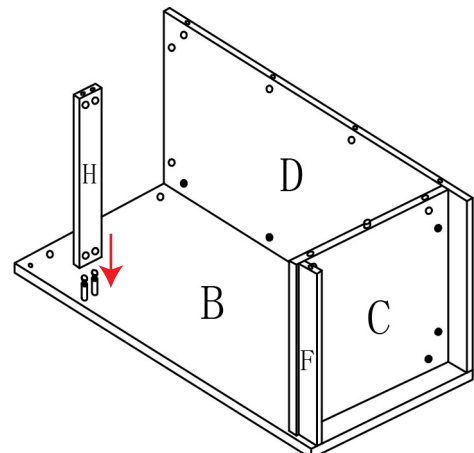


5. Insert 9 cam posts into another Panel B. Install Swing Door G onto assembled panels with sign facing outside, and hold it at its place. Assemble the 2nd Panel B with rest panels by inserting the cam posts into corresponding holes.

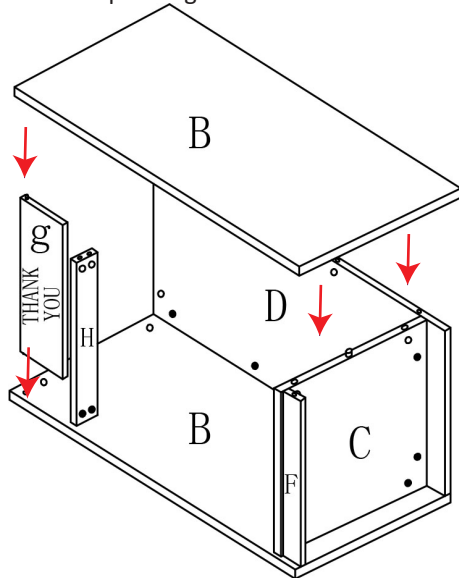

6. Place all Tray Rails (H5) on top of Top Panel A as shown below. Screw in both ends of Tray Rails with screw (H6) provided from the bottom of Top Panel to fix all the metal rails.

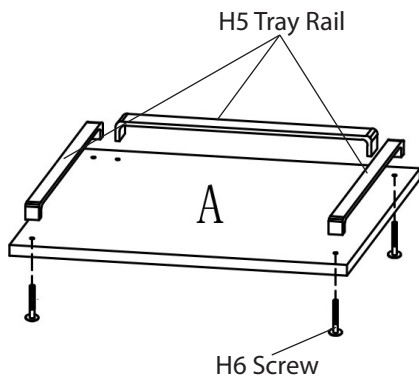


7. Insert 6 cam posts into the bottom of Panel A. Place Panel A on top of the assembled receptacle body, and fit the cam posts into corresponding cam holes. Insert 6 cam locks and tighten them with screw driver.

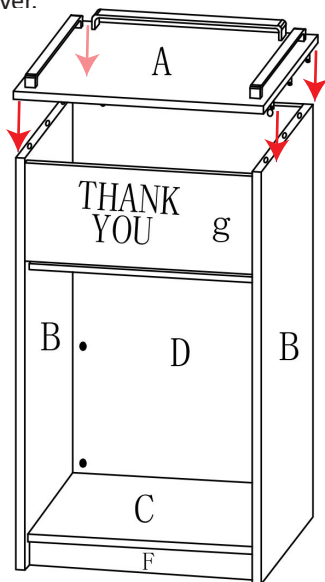



8. Install concealed hinges.

(a) Press the hinge cup into one flat-bottomed hole in the door. Be sure the edge of the hinge is parallel with the edge of the door.
 (b) Drive wood screws (H3) through screw holes in the flange to fix the hinge cup. Secure the other hinge cup in the 2nd bored hole in door.
 (c) Attach the door with hinges assembled with Panel B. Align holes in the hinge plate with pre-drilled holes in Panel B. Drive wood screws (H3) into pre-drilled holes to fix the door panel.

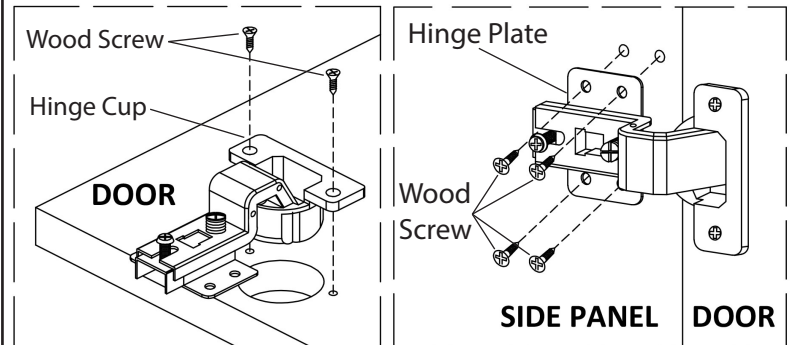


9. Door Adjustments

Open and close the door a few times to check the alignments. Loosen or tighten the hinge adjustment screws as needed to refine the fit of the door. Turn screws a little at a time until the door reaches desired position and works properly.

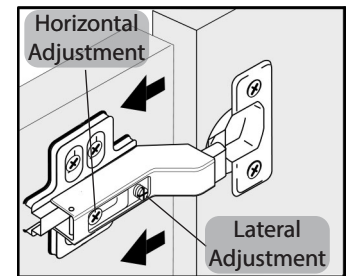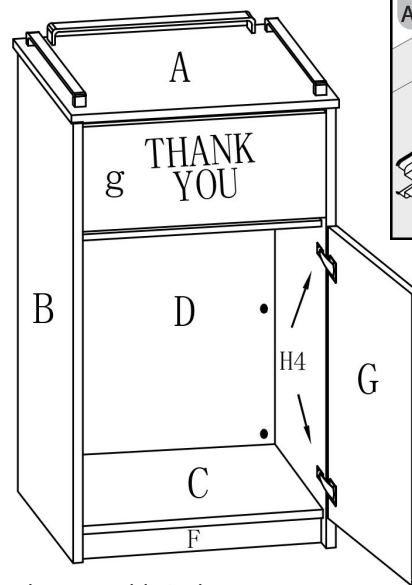

10. The assembly is done.

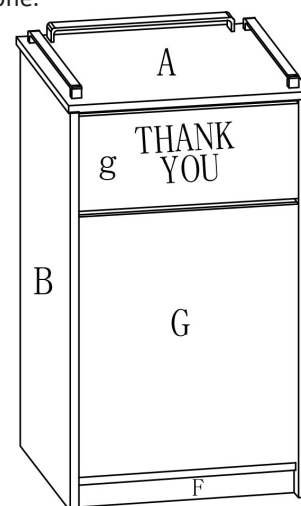

Don't forget to order the rubber liner to finish your receptacle.