

# INSTRUCTIONS

## LED Riser Floor Standing - LEDRSR24, LEDRSR30, LEDRSR36

### SPECIFICATIONS

Input:	AC 100-240V, 50/60Hz, 0.4A Max.
Output:	DC 5V, 2000mA
Battery Capacity:	12.5Ah, DC 3.7V, 45Wh
Battery Life:	>12hours
Charging time:	8hours
Working Temperature:	-10~40 °C; Indoor use only
Storage Temperature:	-25- 60 °C


**⚠ WARNING:**  
**DO NOT open the bottom cover**  
**when the unit is charging.**

#### 1. Wire Connection:

a). Remove the acrylic panel at the bottom.




b). Connect the male end with the female end until the hooks clip into place.

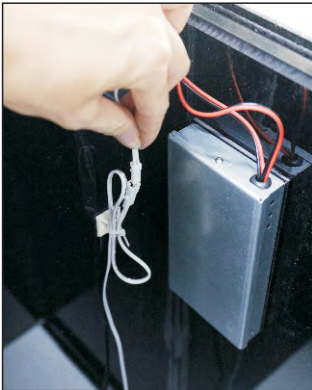

c). Replace the acrylic panel at the bottom and place the unit at its upright position.

Press the on/off switch to power on/off the unit.

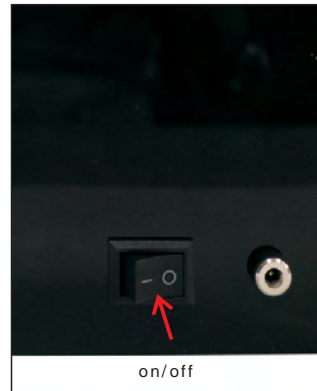

2. Charge the unit: Connect the power adapter with the unit and plug in the power supply to charge.



Scan QR code to visit  
the product page:



If you have any questions regarding our products, please visit us at [www.displays2go.com](http://www.displays2go.com) or contact D2G customer service at 844-221-3388.