


JKTTL Assembly Instructions

Hardware:

- [4] - 2" Screws
- [4] - Large Washers
- [2] - Small Washers
- [2] - Knobs (for leg assembly)
- [2] - Door Keys
- [1] - 2" Wing Bolt
- [1] - 5/32" Allen Key
- [2] - 1/4" Bearings

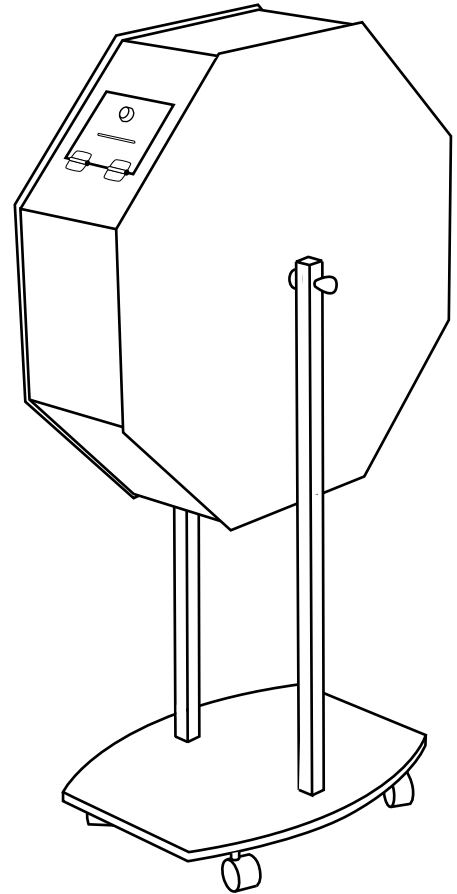

Installation:

1. Set parts up on floor and make sure all parts are present. Lay tumbler on the floor with the door facing up and open.
2. Press bearings one in each side hole with flange outside.
3. Locate the [2] button head cap screws. It is important to first slide [1] large washer and then [1] small washer on each screw.
4. Attach the legs by inserting the screws from the inside of the unit then slide on the legs and tighten knobs and screws with the Allen key provided.
5. Attach unit to the base using the two remaining washers and screws provided slide washers on first and tighten screws using the Allen key provided.
6. Complete the assembly by lifting the unit up the knobs and stand the unit in an upright position.
7. You may lock the tumbler in place by inserting the wing bolt through one leg and turn until it is in the unit preventing it from turning. Make sure the screw does not protrude through the inside of the leg while in the unlock position to prevent scratching.