


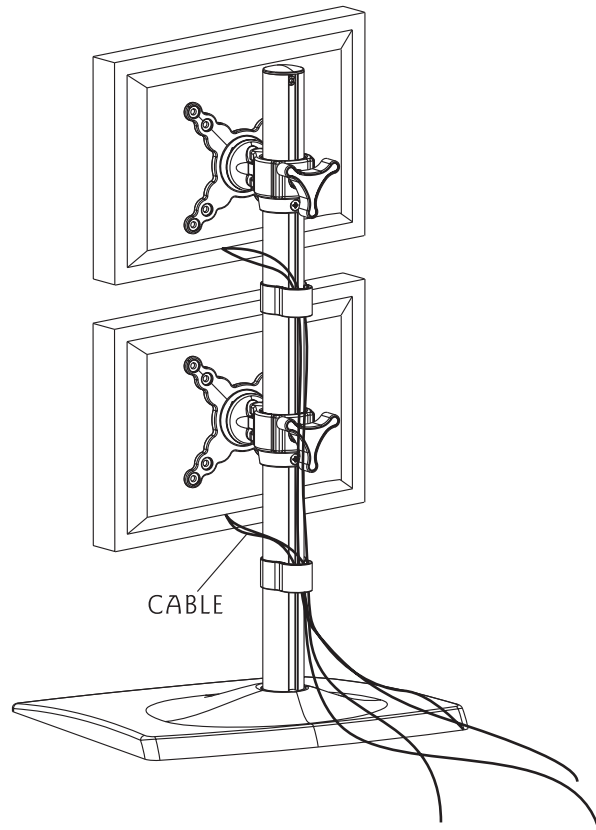

Thank you for choosing our product

Warning

This product contains small items that could be a choking hazard if swallowed. Keep these items away from young children!

1. Make sure these instructions are read and completely understood before attempting installation. If you are unsure of any part of this installation, contact a professional installer for assistance.


2. The wall or mounting surface must be capable of supporting the combined weight of the mount and the display; otherwise the structure must be reinforced.

3. Safety gear and proper tools must be used. A minimum of two people are required for this installation. Failure to use safety gear can result in property damage, serious injury or death.

DISPLAYS2GO

INSTALLATION GUIDE

Item No.: LTB8MLT2DV

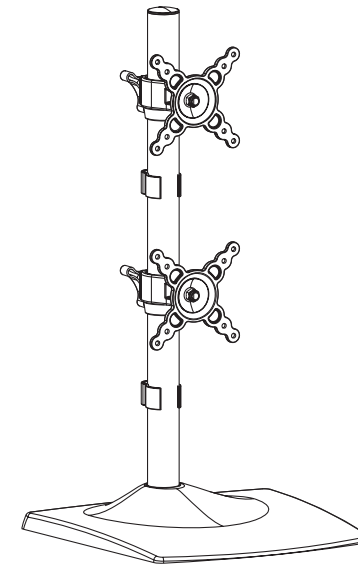

- TV Size Range: 10"~27"
- Max load capacity of each TV plate : 8Kg/17.6lbs
- Integrated Cable management


CAUTION

Please read this guide before installation.

Ensure the correct installation. Keep away from high frequency or power equipment to avoid disturbance. Choose desk to put this product.

We can not be responsible for any damage caused by wrong installation.


Hardware Kit:

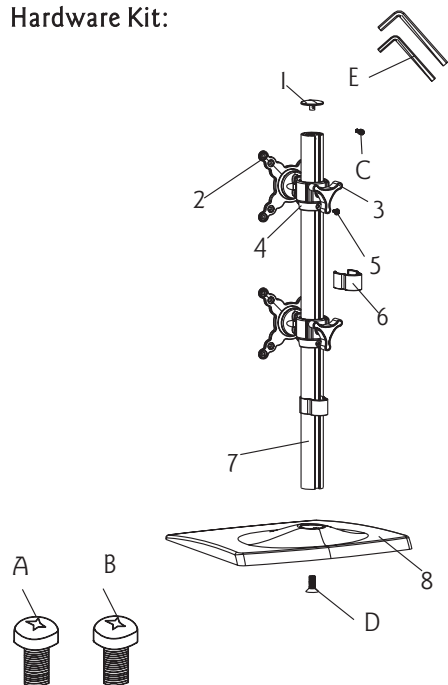


ID	Qty	Description
1	1	Tube Cover
2	2	TV plate
3	2	Knob
4	2	Fixed wreath
5	2	M5x10mm sunk bolt
6	2	Cable cover
7	1	Tube
8	1	Bottom support
A	8	M4×12mm bolt
B	8	M5×12mm bolt
C	1	M4×10mm bolt
D	1	M10×20mm bolt
E	2	3X3,6X6mm Wrench

Part 1-Fixed wreath

Fixed the wreath(4) on the tube by M5x10mm sunk bolt(5).

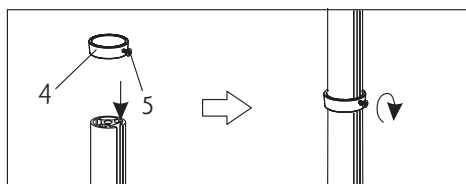


NOTE:



Part 2-Attaching TV plate to screen

Center TV plate on back of the screen and align the eight mounting holes. Select screws(A,B). Attach TV plate to screen using eight selected screws (A,B). Tighten screws firmly. Do not overtighten.

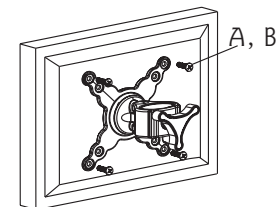

Part 3-Install TV plate and fixed Bottom support

First fixed the bottom support (8) on the tube and use (D) by 6X6mm wrench (E) to make it tighten. Then slide the TV plate into the tube and fixed it by knob (3). When fixed wreath and TV plate are installed, put on the tube cover (1) and use (C) by 3X3mm wrench (E) to make it tighten.

