If short hanger bolts are not attached to bracket(s), here is how to assemble them:

A. Bracket A

B. Bracket B (same as A for MPBDS)

C. M5x55mm Bolt

D. M5x80mm Bolt


E. M5 Nut

F. M5 Washer

2

## SINGLE POLE


- a. Sandwich the single pole with 2 brackets as shown below.
- b. Hold the brackets and insert the bolts through the rectangle slot. Make sure the square section on the bolt fit in the slot.

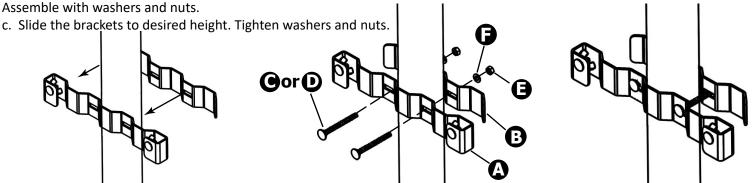


## **DOUBLE POLE** Attach to larger diameter tubes:

- a. Hold both brackets against tubes and insert bolts.
  - b. Square section of bolt under head must fit into rectangular hole.
  - c. Secure with washer and nut. Thread first nut only one or two turns before attaching second nut.
  - d. Then tighten to secure bracket at desired height.


- (2) a. Loosen hanger bolts if required.
  - b. Insert head of each hanger bolt into keyhole slot of hanging display.
  - c. Tighten wing nuts of each hanger bolt.

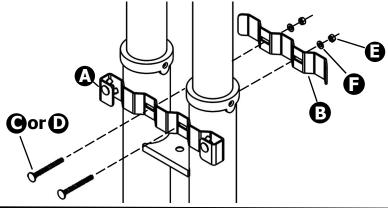



## **DOUBLE POLE** Attach to small diameter tubes:

- a. Assemble brackets with one long bolt secured with washer and nut. Secure nut with only one or two turns.
- b. Rotate, insert and rotate brackets as shown. Secure with second long bolt and washer with nut.

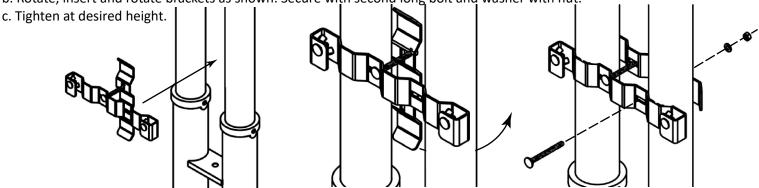

If you have any questions regarding our products, please visit us at www.displays2go.com or contact D2G customer service at 844-221-3388.