

RNDH B1548 - 15'w x 48"h Circular Hanging Banner Assembly Instructions

Parts list:

A: (18) Long Bars (Top/Bottom)




B: (9) Short Bars (Middle)

C: (9) Long Screws


D: (9) Short Screws

E: (1) Wire rope


+ Extra / Replacement pieces.

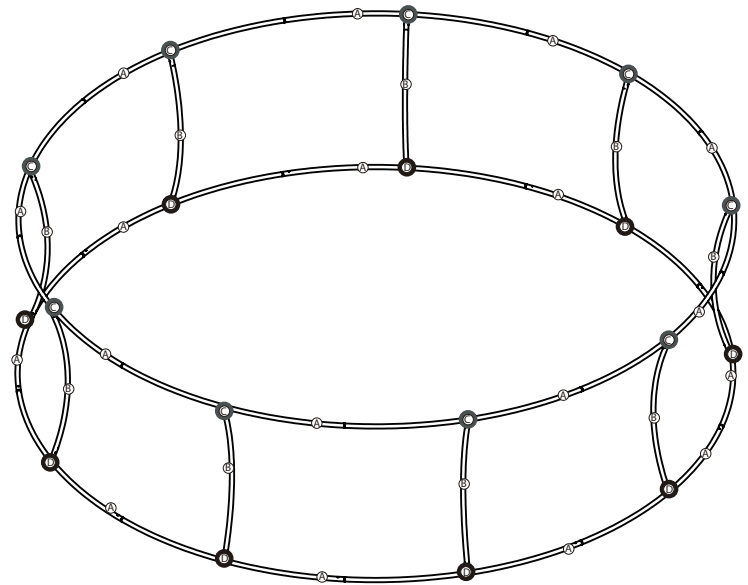


Connect (7) Long Bars (A) end to end to form a closed ring. Repeat this step to form another ring. These are the top and bottom supports for your graphic.




Choose one of the circular rings and align the Short Bars (B) with the holes in the middle of each section.




Please Note Make sure that Middle Supports (B) are bowing inward towards the center of the ring.
Please Note Button Locks should be facing downwards when assembling top frame, and upwards when assembling bottom frame.

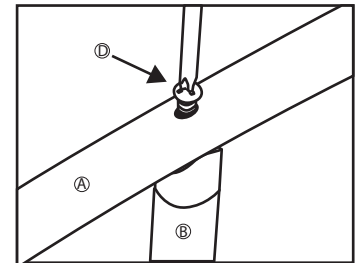


Attach ring to middle supports (B) using the short screws (D).




Set the assembled ring on the ground so the Short Bars (B) are facing upward. Position your unzipped graphic underneath the ring.




Position your graphic so the center seam is aligned with the bottom ring and the printed side faces outwards.




Raise the outside of the graphic up so it rests on the tips of the short poles.

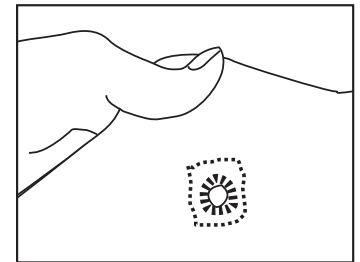


Please Note: Align each of the re-enforced holes with the top of each short pole (B)



With the help of another person rest the 2nd ring on top of the middle supports and drape the banner over the ring. Make sure to keep the banner, ring, and support holes aligned.

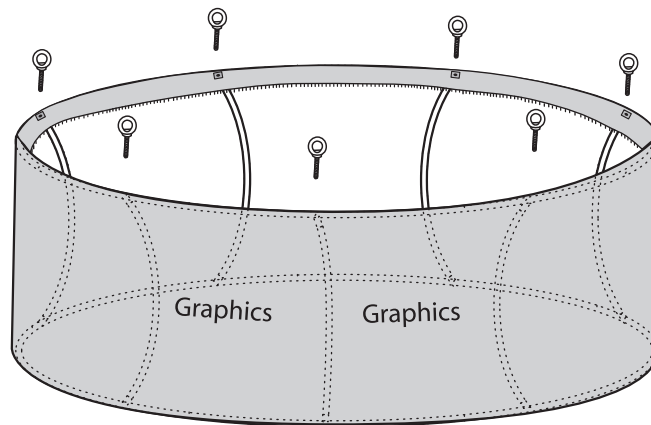

Align all holes then insert long screw and hand tighten.

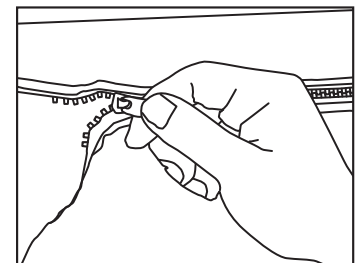

Once all long screws are in place, lift the inside of the graphic and zipper the sections together.

Hang your Banner by clipping the included wire to the eyelets on top of each long screw.

