
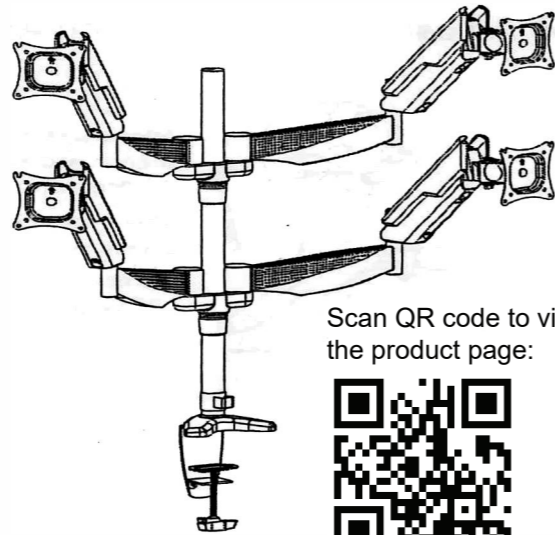


# ASSEMBLY INSTRUCTIONS

## TMTFX4ABV2 - DESK MOUNT QUAD MONITOR STAND

### Gas spring monitor mount

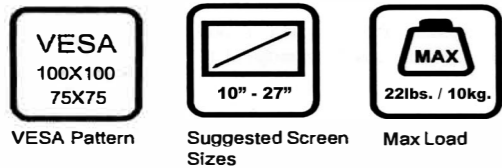


Scan QR code to visit the product page:




### Before you begin:

#### Preparing to install a monitor

1. Check your monitor for 75x75mm or 100x 100mm VESA standard mounting patterns. Monitors without mounting holes cannot be installed to this mount. (Please note: some monitors use these mounting holes to install a standing base. You may be able to remove a pre-installed base on your monitor to reveal compatible mounting holes.)
2. If your monitor has a fixed base, it will need to be removed prior to installation onto the gas spring mount. Be careful not to scratch or damage your monitor when removing components.


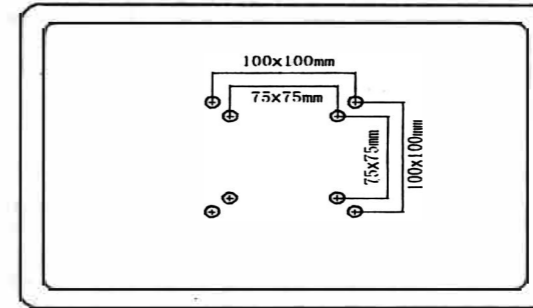


### Main Components

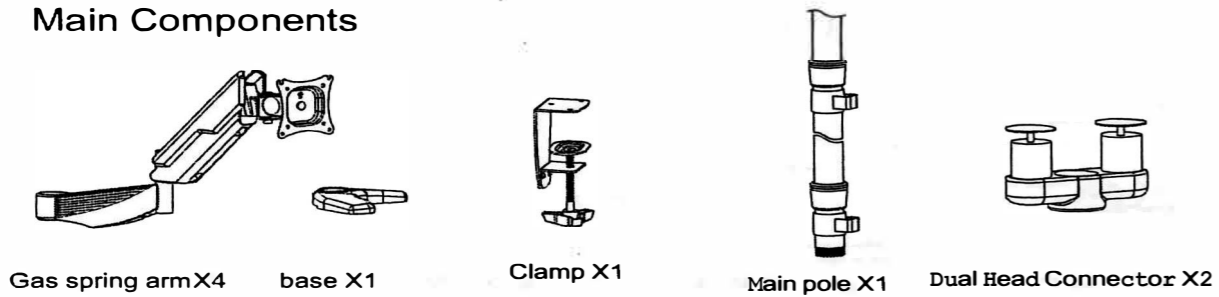


### Step 1 Option 1 Installing using the clamp

Attach clamp to base as shown

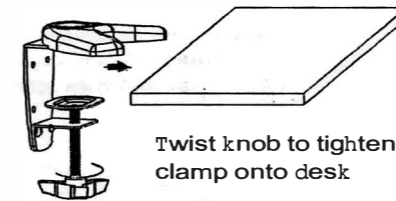


Twist knob to tighten clamp onto desk


### Contents of Screw Package

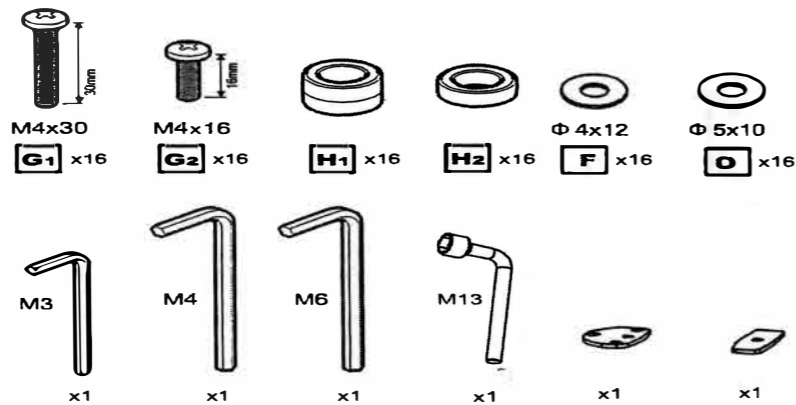

### Step 1 Option 2 Installing using a pre-drilled hole




Disassemble clamp as shown



Remove clamp pad and bracket



Keep the countersink face down  
Attach countersink to base as shown




Tighten according to the thickness of the desk  
Attach the screw to the base through the screw plate using a pre-drilled hole in the desk


# ASSEMBLY INSTRUCTIONS

## TMTFX4ABV2 - DESK MOUNT QUAD MONITOR STAND


### Step 2 Installing the main pole onto the clamp base

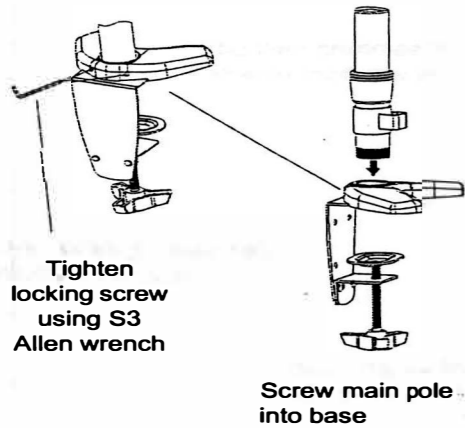

### Step 3 Installing the gas spring arm onto the main pole

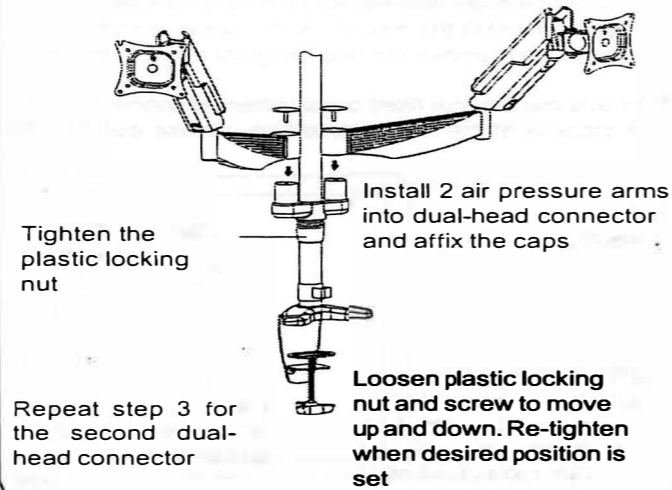

### Step 5 Adjusting the gas spring arm

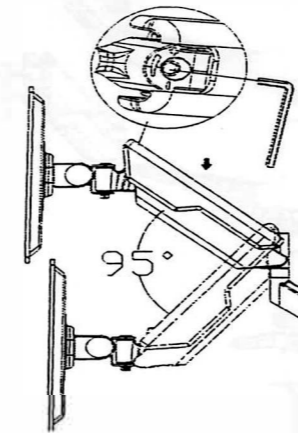


After a monitor has been installed, the angle of the gas spring arm can be adjusted up or down in a range of 95 degrees.



If the arm does not move downward when you apply gentle force, or springs back from the down position, use the included Allen wrench to turn the adjustment screw toward the "-" symbol to decrease the pressure and try again.

If the arm droops and will not remain in the up position, set it to the up position and use the included Allen wrench to turn the adjustment screw toward the "+" symbol to increase the pressure.


### Step 4 Option 1 Installing a flat monitor

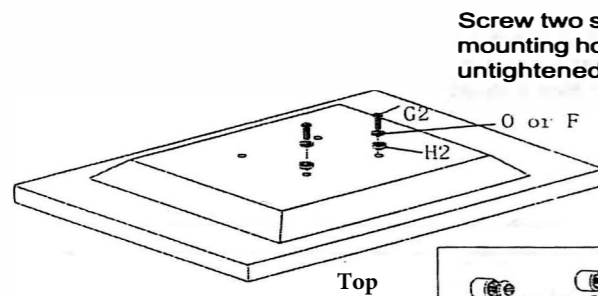

### Step 4 Option 2 Installing a curved monitor

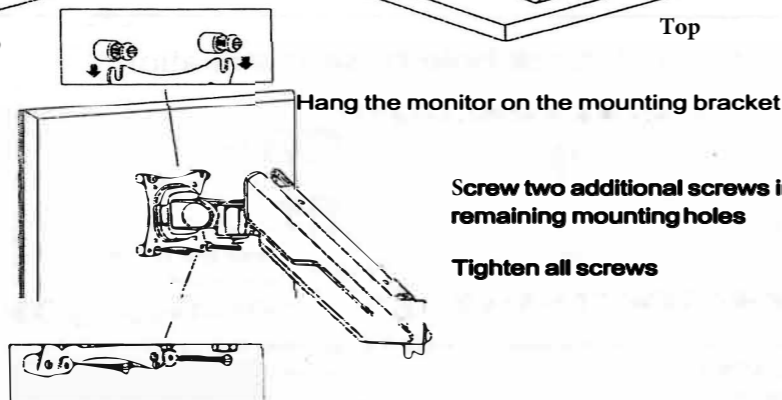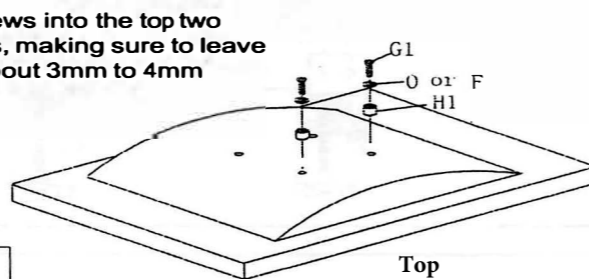

### Step 6 Managing cables and troubleshooting the bracket

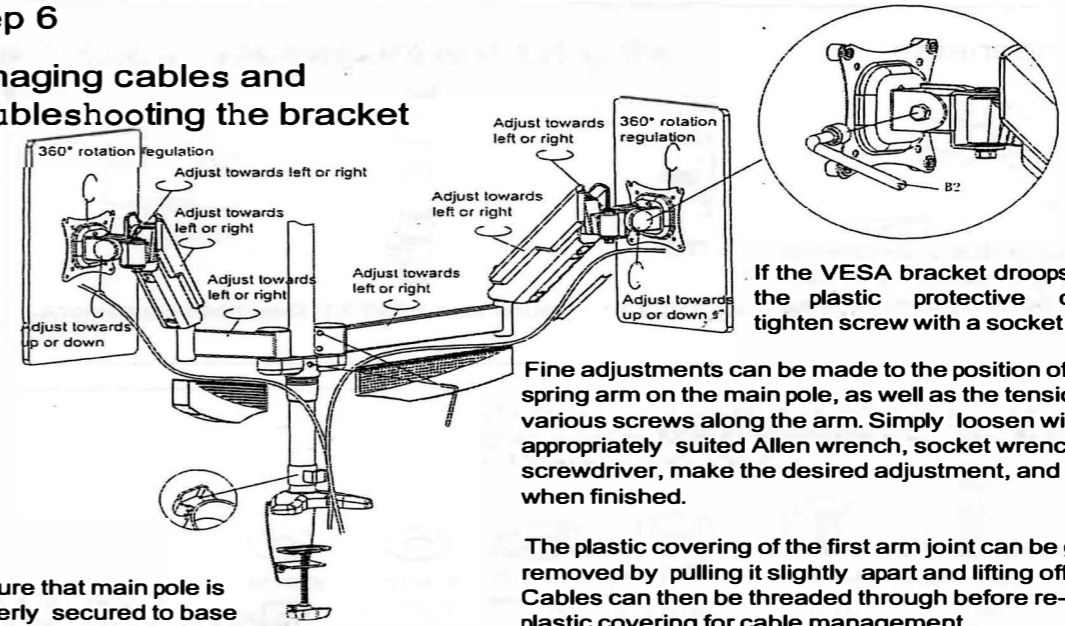

If the VESA bracket droops, remove the plastic protective cap and tighten screw with a socket wrench

Fine adjustments can be made to the position of the gas spring arm on the main pole, as well as the tension of the various screws along the arm. Simply loosen with an appropriately suited Allen wrench, socket wrench, or screwdriver, make the desired adjustment, and re-tighten when finished.

The plastic covering of the first arm joint can be gently removed by pulling it slightly apart and lifting off the arm. Cables can then be threaded through before re-attaching the plastic covering for cable management.

#### Warnings

This mount contains high pressure gas spring parts. Do not expose to high heat or fire. Do not attempt to dismantle or modify the the gas spring, as this could cause serious injury to occur. The small parts included with this monitor mount present a choking hazard. Please keep any small parts away from children.

Please read all instructions and ensure that you understand them fully before attempting installation. If you are unclear on any of the instructions, seek professional installation assistance. Be sure to wear the appropriate safety gear, like eye protection, during installation. Ensure that you have the proper tools and enlist help if the installation proves difficult on your own. The lack of proper safety gear and appropriate tools can lead to serious injury or damage to personal property. Ensure that all screws and connections are properly tightened. As these can come loose over time, it is recommended that you make routine checks of all screws and connections once every two months.

This product is for indoor use only. Outdoor use may result in damage to the item or personal injury.

If you have any questions regarding our products, please visit us at [www.displays2go.com](http://www.displays2go.com) or contact D2G customer service at 844-221-3388.