

# INSTALLATION GUIDE


## TV Stand Mount

### TVSDP2642B

Support 26" to 42" Screens

Max Load Capacity: 100 lbs (45 kg)

**VESA 100x100 / 200x100/200x200 compatible**

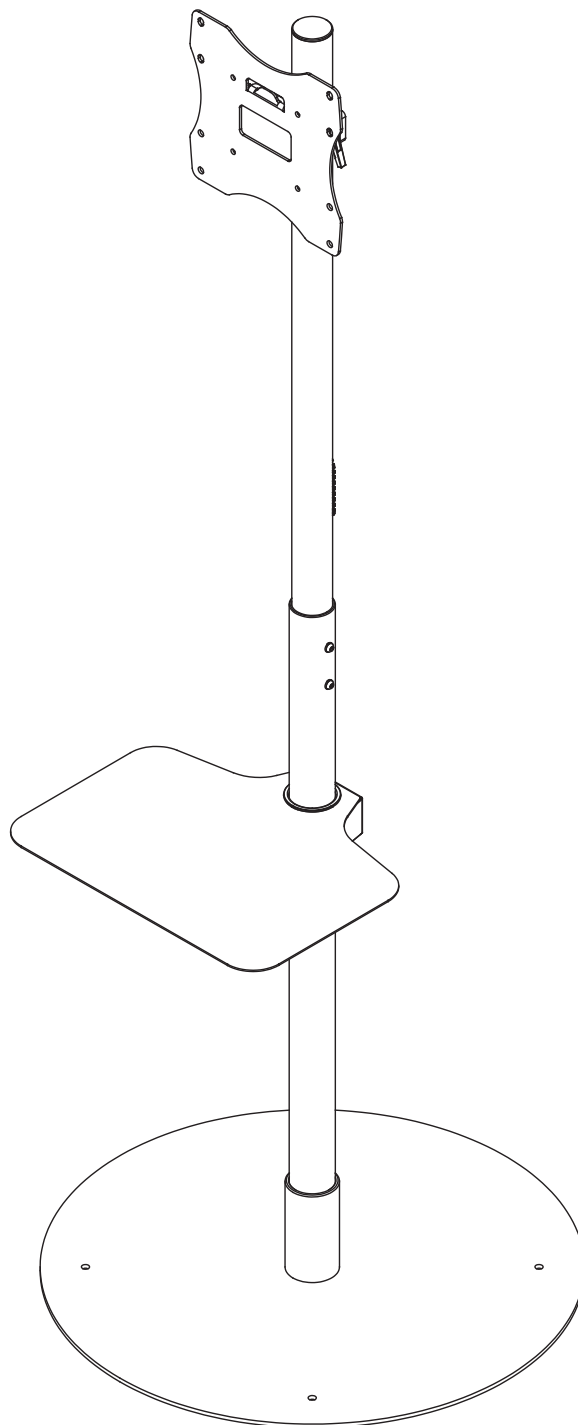

## ⚠ WARNING

- Be sure to read this entire manual thoroughly and you fully understand all the instructions and warning before attempting to begin your installation.
- This product should only be installed by someone who has a basic knowledge of building construction, installations and fully understands these instructions.
- Always have someone assist you to lift and position your equipment.
- Tighten screws and bolts firmly, but do not over tighten. Over tightening can damage the items and greatly reduce their ability to hold. Please refer to suggested torque values where applicable in these instructions.

## Tools Needed for Assembly



- level
- phillips screwdriver

## Table of Contents



- |  |   |
|--|---|
| ① Install the Rubber pad onto base floor (DD)      | ⑥ Mount adapter plate (FF) to screen    |
| ② Install the first pipe (GG) onto base floor (DD) | ⑦ Mount display (FF)                    |
| ③ Mount the AV tray (CC) onto the first pipe (GG)  | ⑧ Adjust angle                          |
| ④ Mount the second pipe (EE)                       | ⑨ Using cable management                |
| ⑤ Mount the head assembly (AA) onto second pipe    | ⑩ Fix the stand to the floor (optional) |

## A. Installation hardware kits


### 1. For TV's

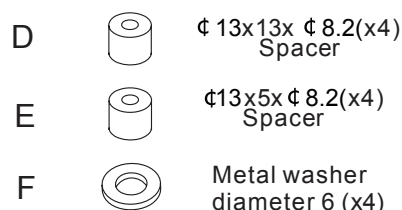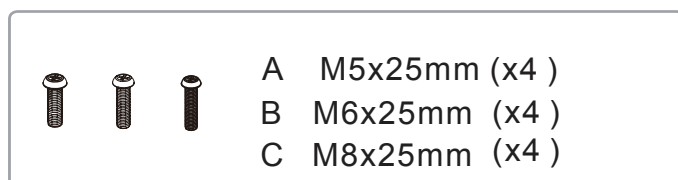

### 2. For installing the stand cart

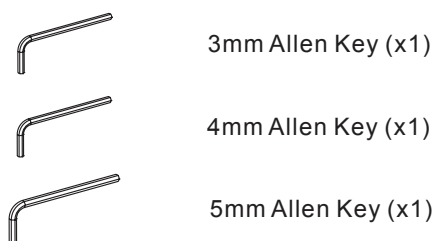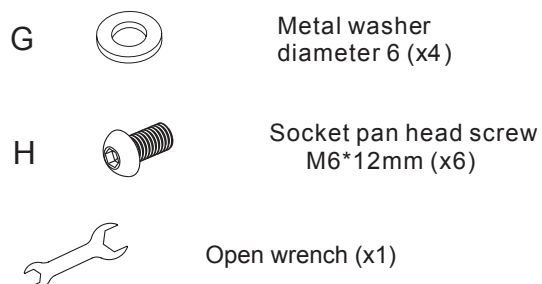


### 3. For installing the stand cart




## B . Component checklist


**AA**  
(Head Assembly)




**BB**  
(AV Tray)




**CC**  
(Base Floor)



**DD**  
(Second Pipe)


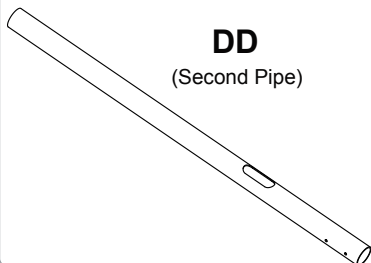


**EE**  
(First Pipe)

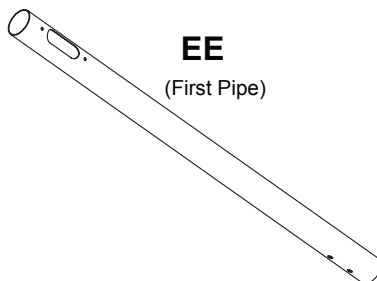



**1**

**Install the rubber pad onto base floor (CC)**

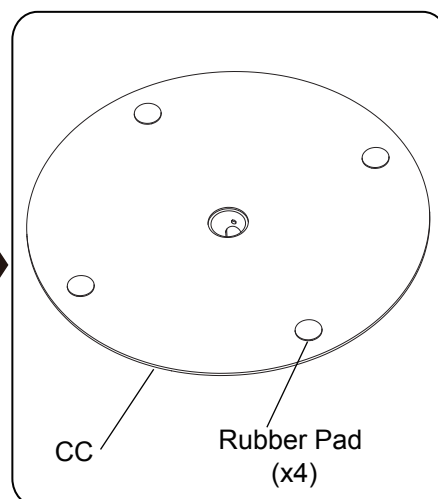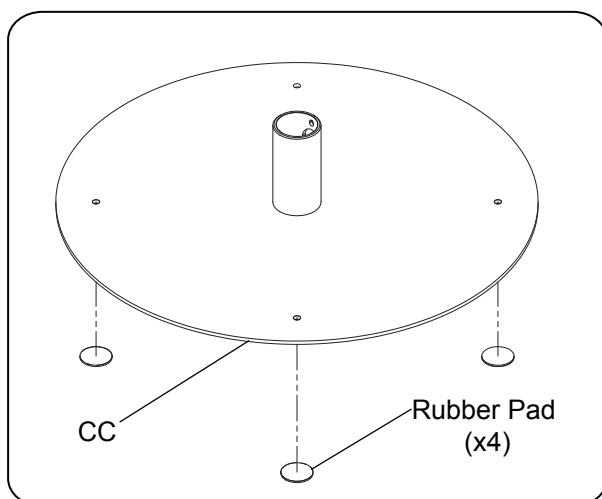


**2**

**Install the first pipe (EE) onto base floor (CC)**

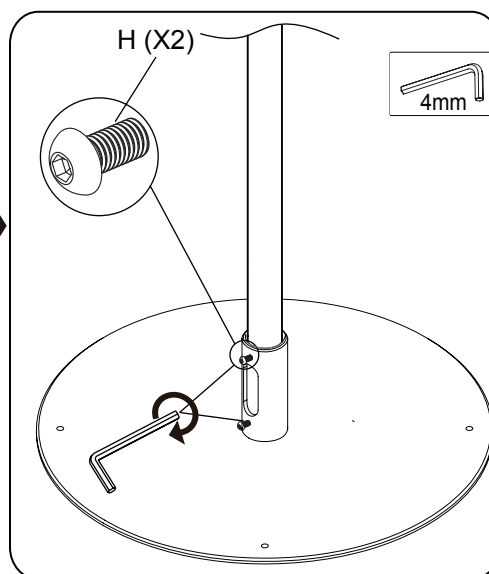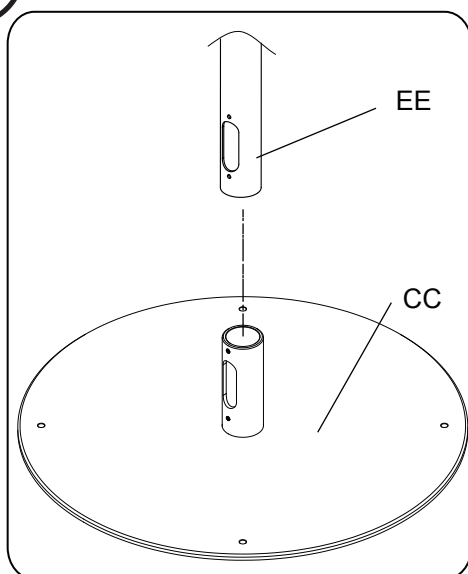


### 3 Mount the AV tray (BB) onto the first Pipe (EE)

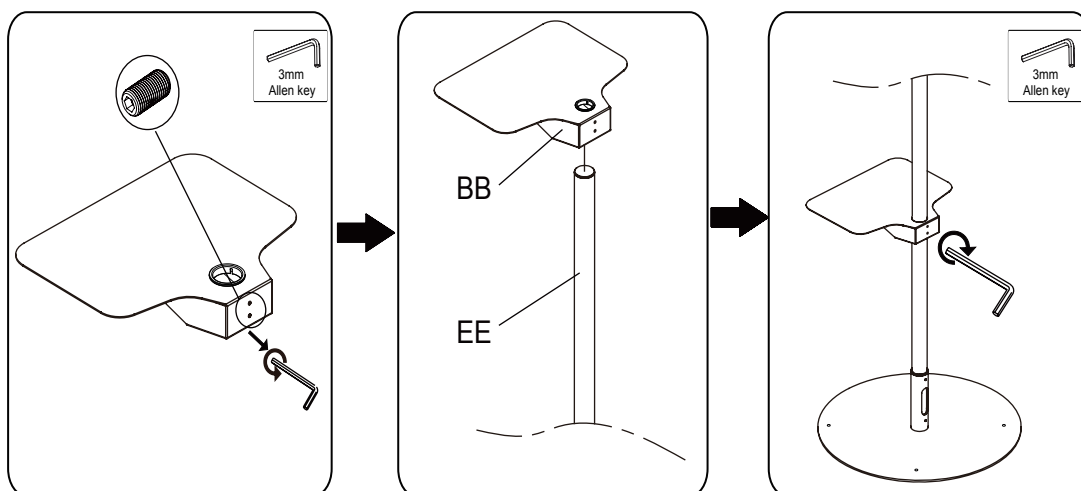


### 4 Mount the Second Pipe (DD)

Mount the second pipe (DD) onto the first pipe (EE).

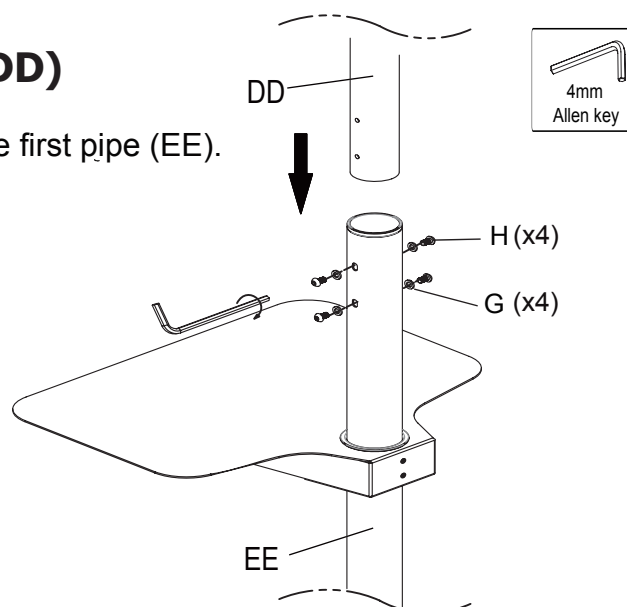


### 5 Mount the Head Assembly (AA) onto second pipe (DD)


1) Screw off the nut first.

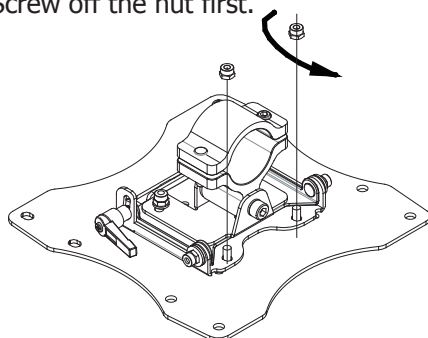


2)

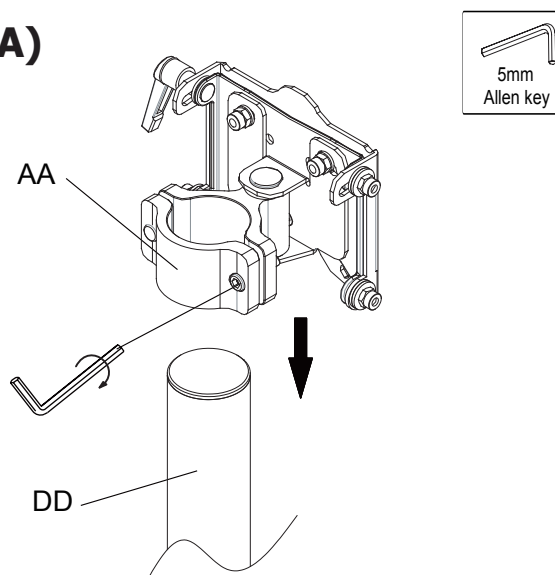

## 6 Mounting the assembly the adaptor plate to screen

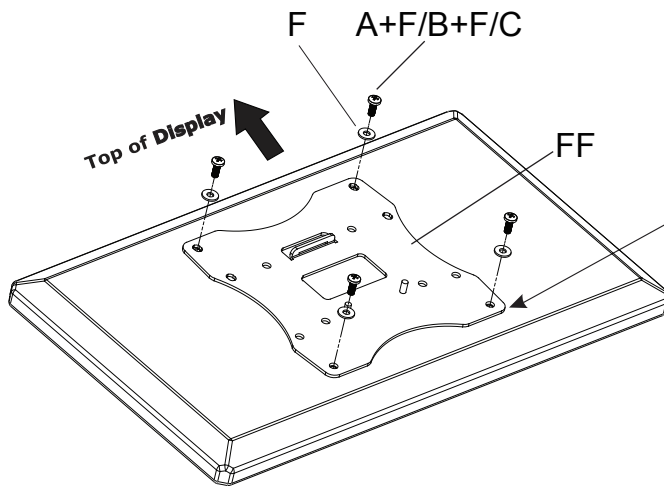

\*For screen with a hole pattern in a pocket, spacer go between Assembly 200×200 Adapter Plate and screen.





### Note:

Recessed Mounting Holes.  
If the mounting holes are recessed into the back of the display, use the supplied spacer to pack the recessed hole. Ensure that the brackets are securely fixed to the display.

## 7 Mount display

Mount the universal adapter kit onto display .

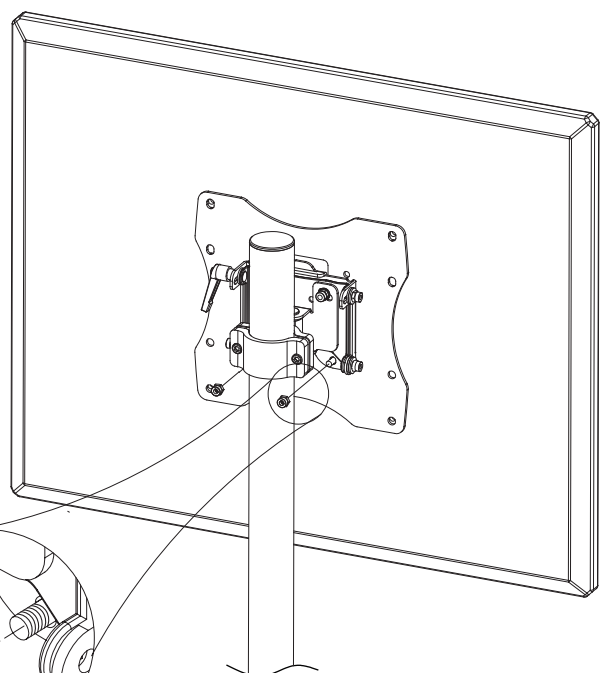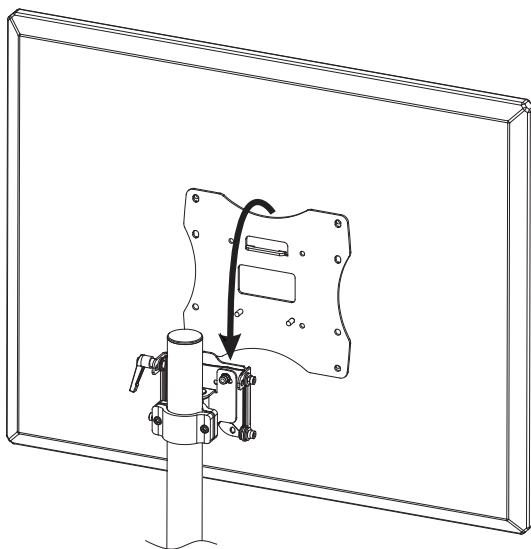

Open wrench






Nut M6(X2)


8

## Adjust angle

Second person will be required to assist !

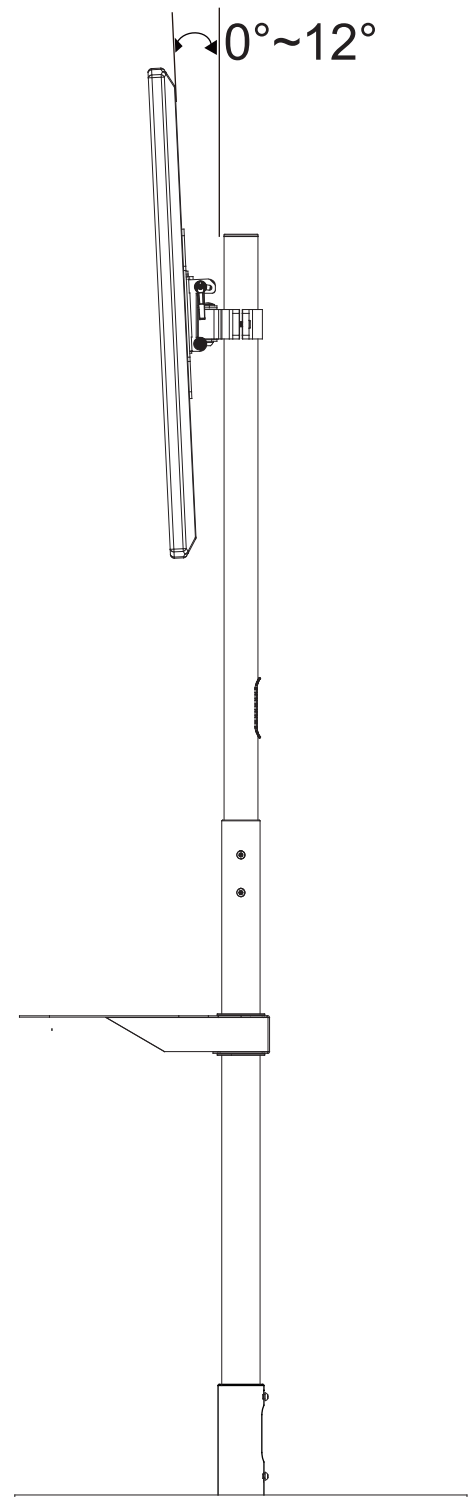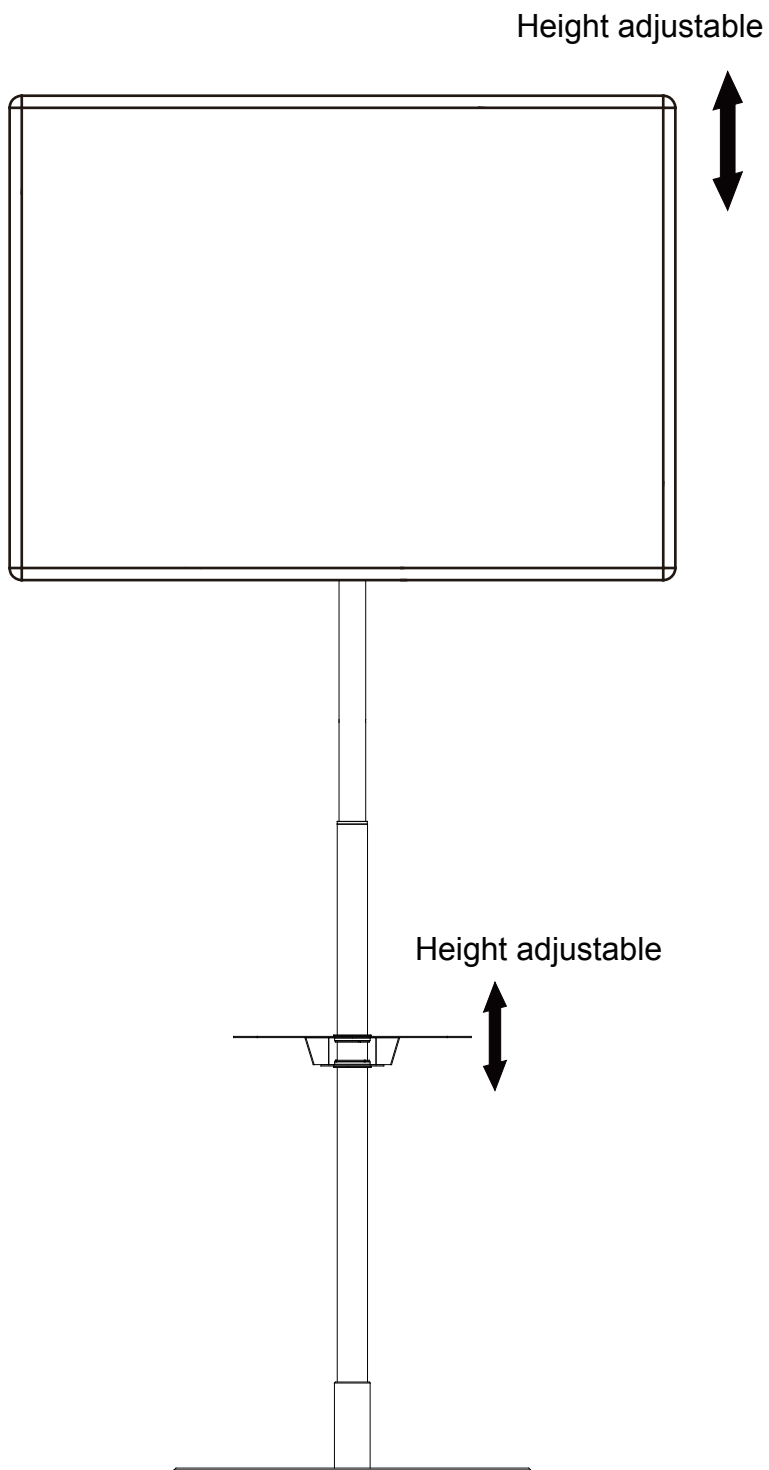

## 9 Using cable management

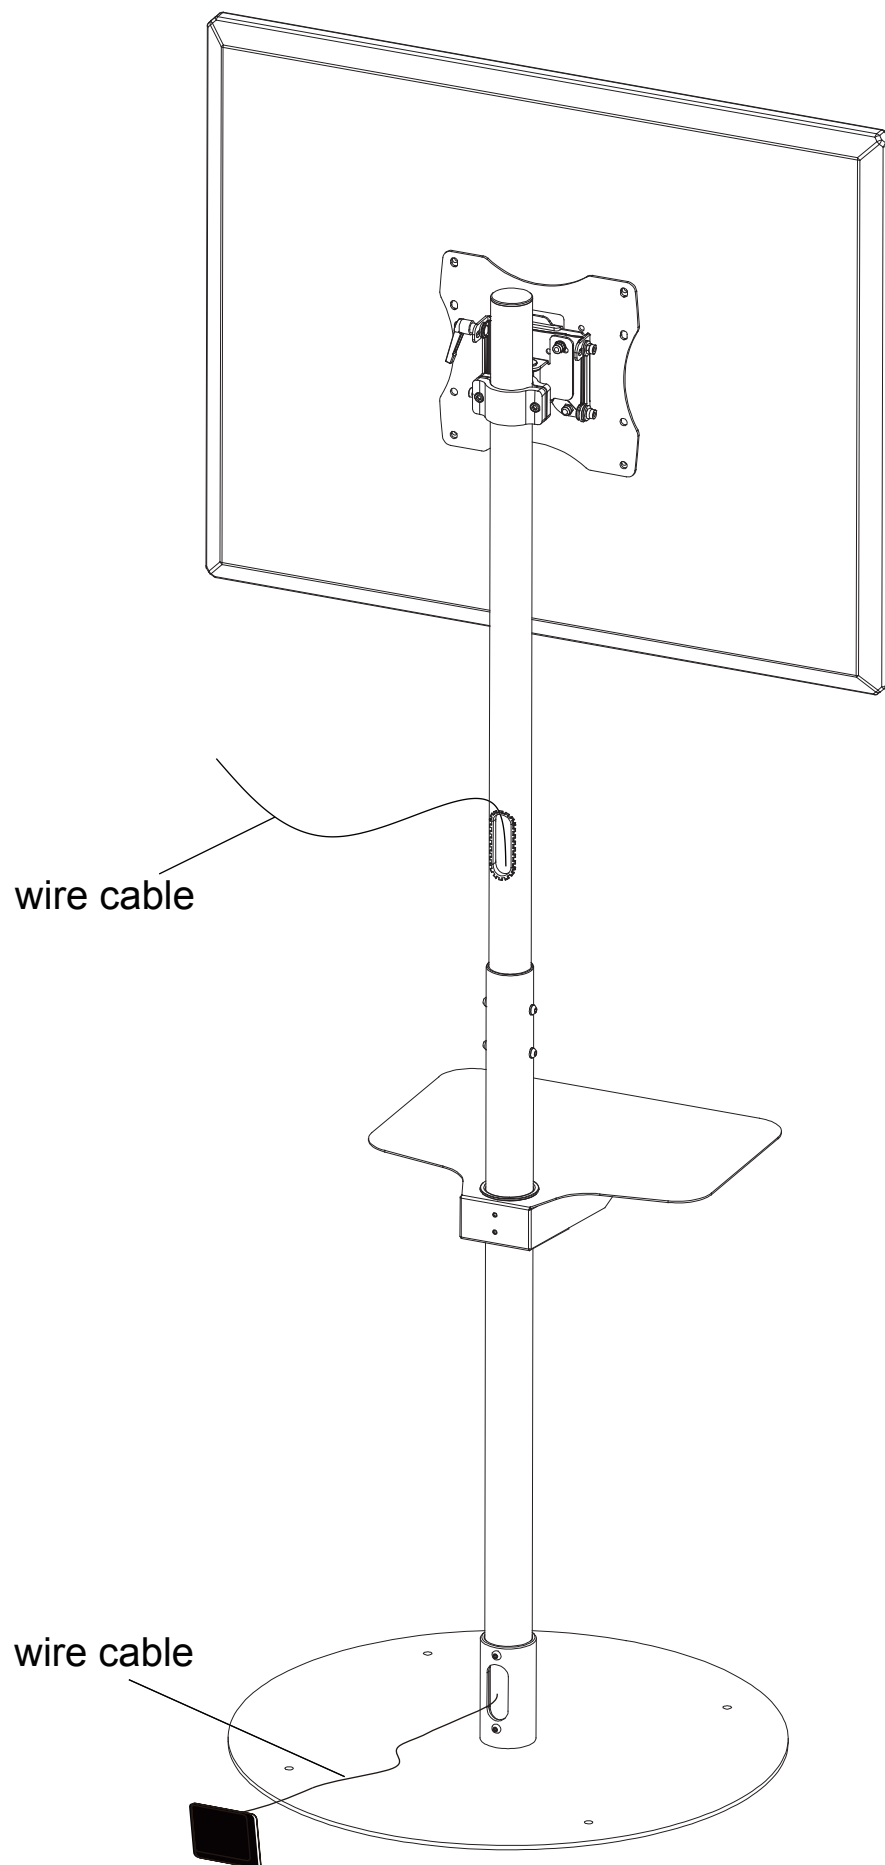

# 10 Fix the stand to the floor(Optional)

