

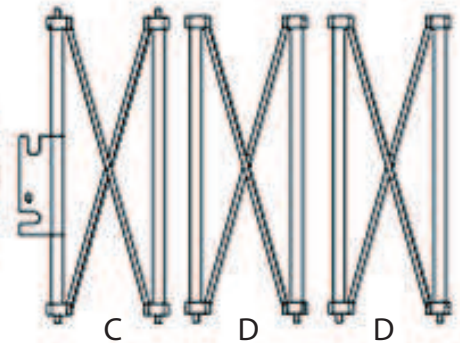



TVTRUSS74 Assembly Instructions

Thank you for purchasing the TVTRUSS74 Truss Display Stand. This truss display stand will accommodate LCD screens up to 50" diagonal.

Part	ID	Qty
Base	A	1
Top	B	1
Top Truss	C	1
Truss	D	2
Rails	E	1
Bracket	F	2
O-Rings	G	8
Hex Wrench	H	1
Bolt	I	4
Carry Bag (not shown)		1


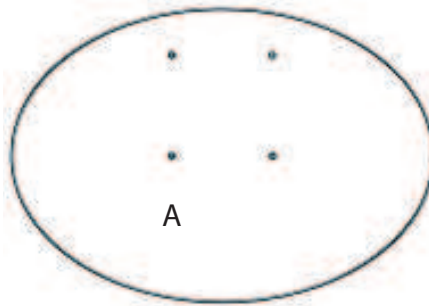


Step 1.

Open a Truss (D) section and align screws with holes on Base (A).

Rotate truss tubes clockwise. Make one full turn on one truss tube and repeat on next tube.

Continue to alternate turning all truss tubes to ensure Base does not bind. Tighten all four truss connectors.

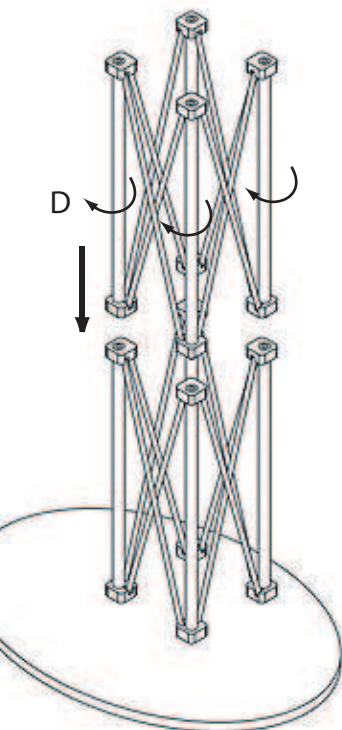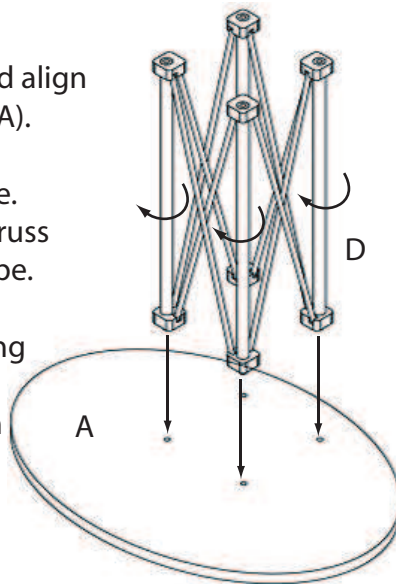

Step 2.

Open Truss (D) section and align screws with holes on truss from Step 1. Fasten using same procedure in Step 1.



Step 3.

Top Truss (C) and Top (B) must be assembled at the same time. Align screws of Top Truss with holes of Truss (D) and place Top (B) on Top Truss (C).

Rotate Top Truss tubes clockwise. Make sure threads catch at top and bottom. Complete one half turn on one truss tube and repeat on next tube.

Continue to alternate turning truss tubes to prevent binding. Tighten all four tubes.

IMPORTANT! Brackets on Top Truss must be placed as shown, so LCD screen is over center of Base.

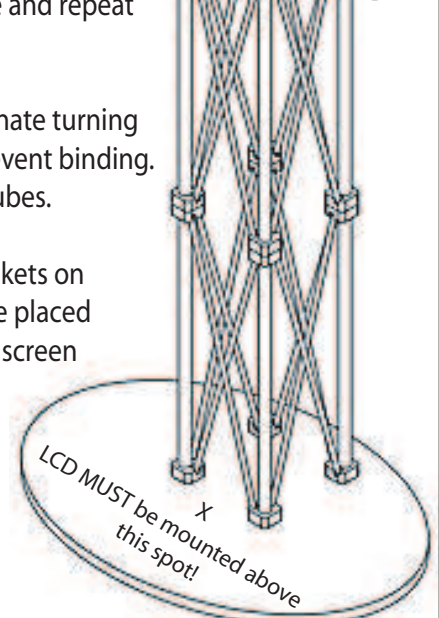
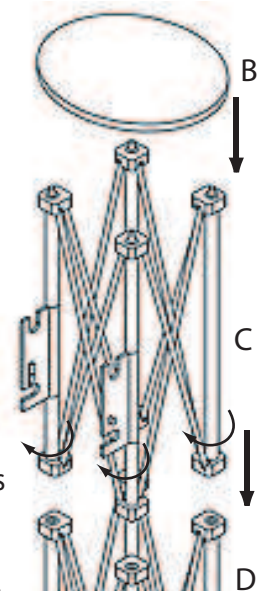


TVTRUSS74 Assembly Instructions

Thank you for purchasing the TVTRUSS74 Truss Display Stand. This truss display stand will accommodate LCD screens up to 50" diagonal.

Step 4.

Place O-Rings (G) on rails. Spread O-rings on each rail apart so they will not interfere with LCD mounting.

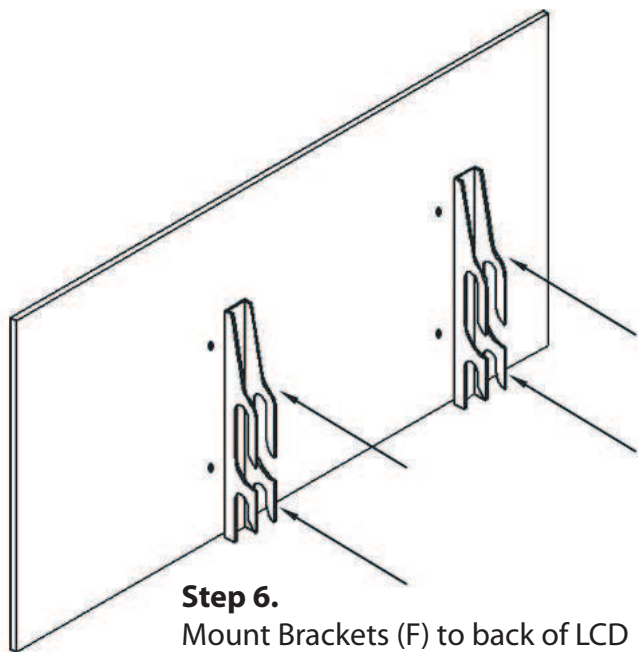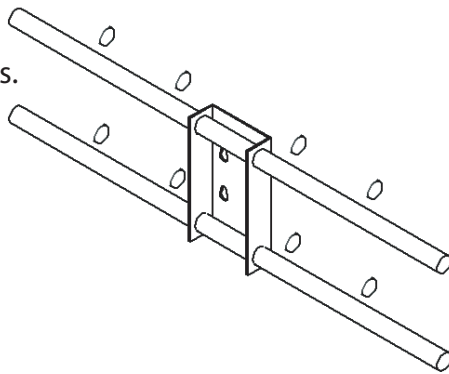

Step 6.

Mount Brackets (F) to back of LCD screen using hardware (I) and hex wrench (H) provided.



Hooks on brackets to point down as shown.

Step 7.

With two people, lift LCD screen and hook brackets on rails as shown.

Check to ensure LCD screen is centered on rails, and all four hooks are engaged to rails. Tighten lock bolts to secure screen.

Slide O-rings up against each side of LCD brackets.

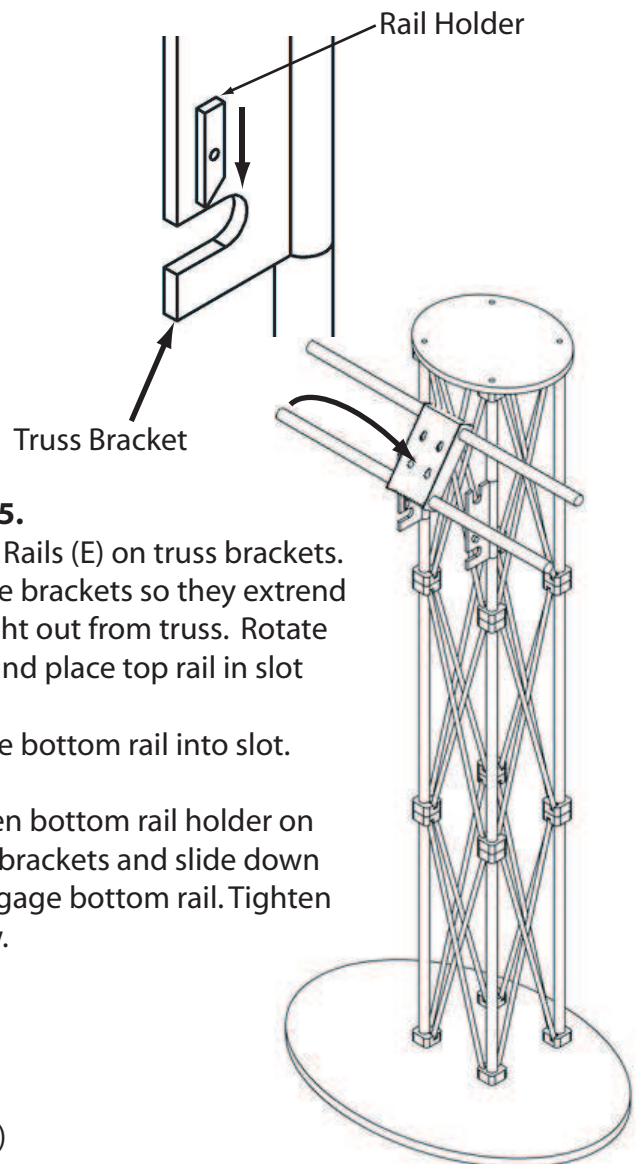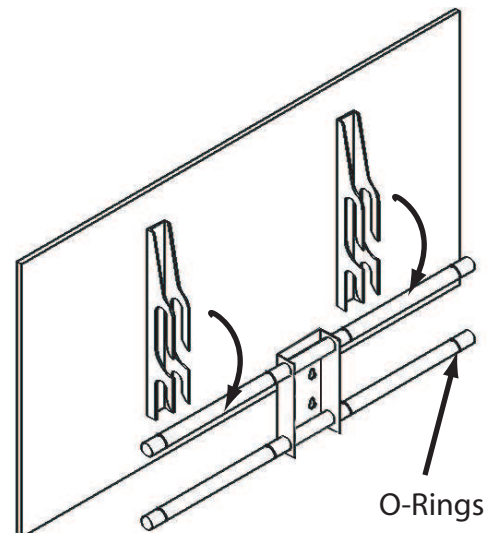

Step 5.

Place Rails (E) on truss brackets. Rotate brackets so they extend straight out from truss. Rotate rails and place top rail in slot

Rotate bottom rail into slot.

Loosen bottom rail holder on both brackets and slide down to engage bottom rail. Tighten screw.