



Wireless Screen Sharing Dongle



Key Features

- Mirrors your computer screen to a smart interactive display at any time without wiring.
- One-press to mirror your computer screen to a smart interactive display without installation and configuration.
- Supports Windows 7/8/10 and Mac OS.
- Reverse control allows users to control the computer on the smart interactive display.
- Up to 1080P resolution, provides high-definition images.
- Supports playing audio synchronously without additional cables to transmit audio signals.


NOTE: In order to mirror computer screen to interactive white board the dongle must be plugged into the computer USB port.

SPECIFICATIONS

Connection Method	USB device
Compatibility	Windows 7/8/10、 Mac OS
Resolution	720P~1080P
Frame Rate	Audio/Video: 18~25
Time Delay(ms)	100~150
Display Mode	Supports desktop expansion (Windows 7/8/10)
Reverse Control	Supports 10-point multi-control on the smart interactive display to control the computer screen (Windows 7/8/10)
	Supports controlling the computer screen via a mouse on the smart interactive display (Windows 7/8/10、 Mac)

Number of Dongles Connected to a Display Simultaneously	1~8 (an industrial router is required when connecting more than 8 dongles simultaneously)
Number of Screens Projected Simultaneously	1~4
Wireless Speed	Transmitter side: 300Mbps
Wireless Transmission Protocol	IEEE 802.11 a/g/n/ac
Frequency Band	2.4G/5G
Encryption	AES
Authentication Protocol	WPA2 PSK
Dimensions(L*W*H) (inch)	5.990 X 2.954 X 0.541

Dimensions

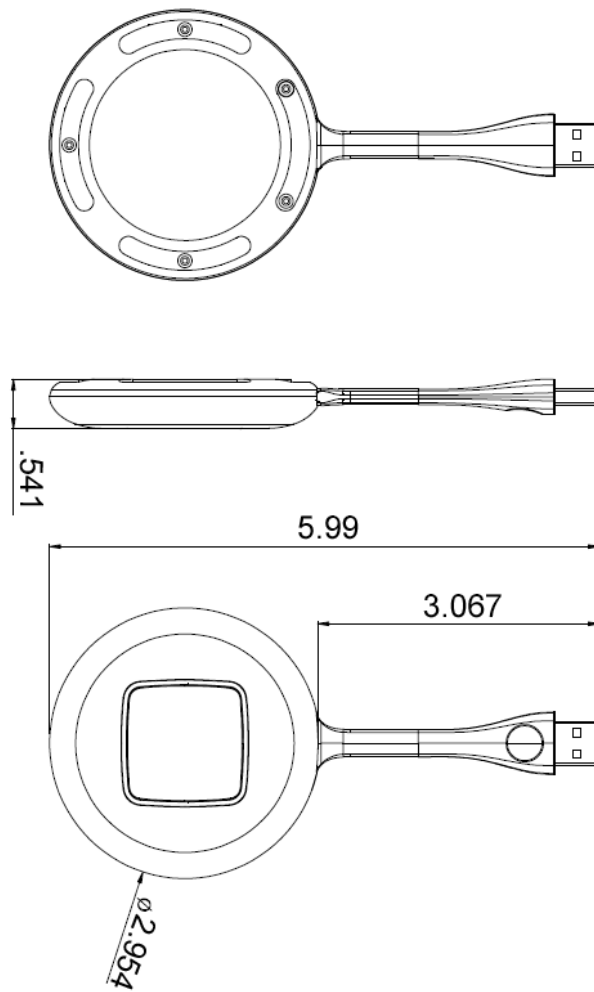

If you have any questions regarding our products, please visit us at www.displays2go.com or contact our customer service at 1-844-221-3393.