

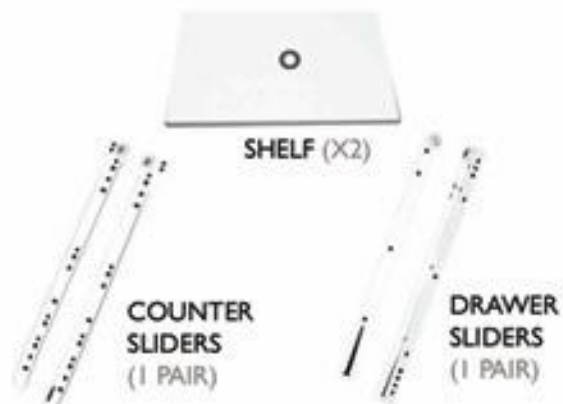





LEDGETOP COUNTER ASSEMBLY INSTRUCTIONS

 **DISPLAYS2GO**


Display Stuff **Better.**



TOOLS NEEDED



Scan to visit the
product page.



NOTE: It is recommended that two persons assemble this unit.

1.

BASE ASSEMBLE

BOTTOM PANEL (x1)
 TOE KICK PANEL (x2)
 #10 CAM LOCK (x16)
 BOLT (x4)
 GLIDE (x4)

1. Connect toe kick panel to bottom panel using bolts.
2. Insert and tighten #10 cam locks.
3. Attach glides on the toe kick.



2.

CENTER PANEL & FRONT PANEL ASSEMBLE

CENTER PANEL (x1) BOLT (x4)
 FRONT PANEL (x1) LEFT COUNTER SLIDER (x1)
 #10 CAM LOCK (x12) #6x12 PHILLIPS SCREWS (x2)

1. Attach slider to center panel; tighten.
2. Attach center panel to bottom base; tighten.
3. Connect the front and bottom panels; tighten.



3.

TOP PANEL ASSEMBLE

TOP PANEL (x1)
#10 CAM LOCK (x4)
BOLT (x4)

1. Attach top panel using bolts.
2. Tighten #10 cam locks.




4.

LEDGE TOP ASSEMBLE

LEDGE TOP PANEL (x1)
LEDGE TOP FRONT PANEL (x1)
#10 CAM LOCK (x12)
BOLT (x2)

1. Connect ledge top front panel and ledge top panel ; tighten.
2. Attach ledge top piece to counter; tighten.

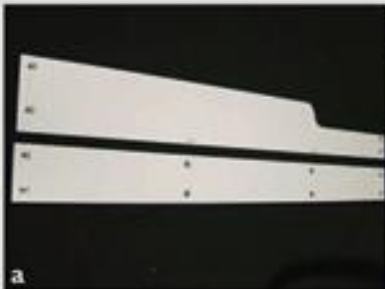

5.

RIGHT SIDE PANEL ASSEMBLE

RIGHT SIDE PANEL (x1)
BOLT (x14)

1. Attach right side panel using bolts.
2. Tighten #10 cam locks.



6.

LEFT SIDE PANEL ASSEMBLE

LEFT SIDE PANEL (x1)
BOLT (x14)
LEFT COUNTER SLIDER (x1)
#6x12 PHILLIPS SCREWS (x2)

1. Attach slider to the left panel with #6x12 phillips screws.
2. Attach left panel to counter; tighten.



7.

SECURE ALL CAM LOCKS & INSTALL COVER CAPS

#10 SCREW CAPS (x28)

1. Tighten all #10 cam locks and screws.

2. Install #10 screw caps.



8.

DRAWER ASSEMBLE

DRAWER FRONT (x1)

DRAWER RIGHT (x1)

DRAWER LEFT (x1)

DRAWER BOTTOM (x1)

DRAWER BACK (x1)

DRAWER SLIDERS (1 PAIR)

#10 CAM LOCKS (x4)

DOWEL PINS (x4)

#6x12 PHILLIPS SCREWS (x4)

#10 SCREW CAPS (x4)

1. Insert dowel pins into place.

2. Connect drawer left, drawer right, and drawer back pieces.

3. Slide in drawer bottom.

4. Attach drawer front to drawer using bolts; tighten #10 cam locks.

5. Attach drawer sliders to drawer using #6x12 phillips screws.

6. Install #10 screw caps.




9.

INSTALL DRAWER & SHELVES

SHELF SUPPORT PINS (x8)

1. Insert shelf support pins in place.

2. Slide drawer and shelf into place.


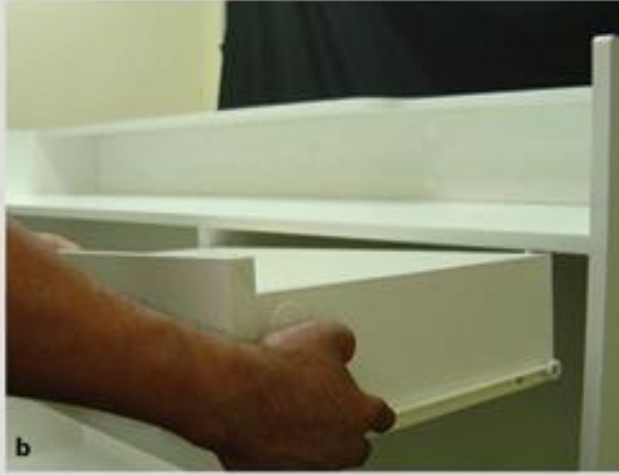


Assembly is complete.

Installing Custom Printed Panel

ⓘ For *BKLT48CGSV*, *WHLT48CGSV*, *BKLT72CGSV*, *WHLT72CGSV* only.

1. Place the custom printed panel at the desired location on the counter. Mark the center of each hole with a pencil onto the surface.
2. Set aside the panel. Place the stand-off threaded flanges onto the included screws.
3. Using a power drill and a 1/16" bit, drill screws and threaded flanges into the center of each mark.
4. Screw each stand-off base onto the threaded flange bases.
5. Place panel onto bases, then screw stand-off caps into stand-off bases to secure the panel.

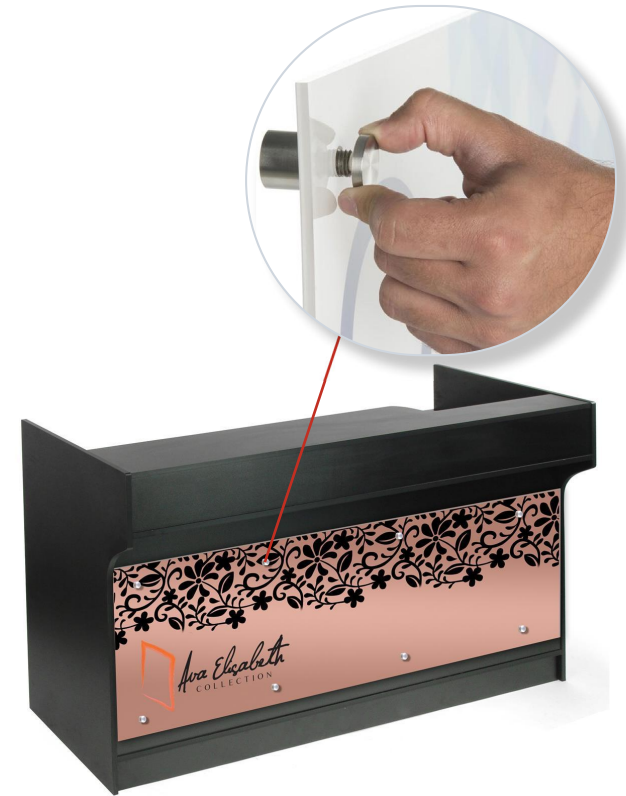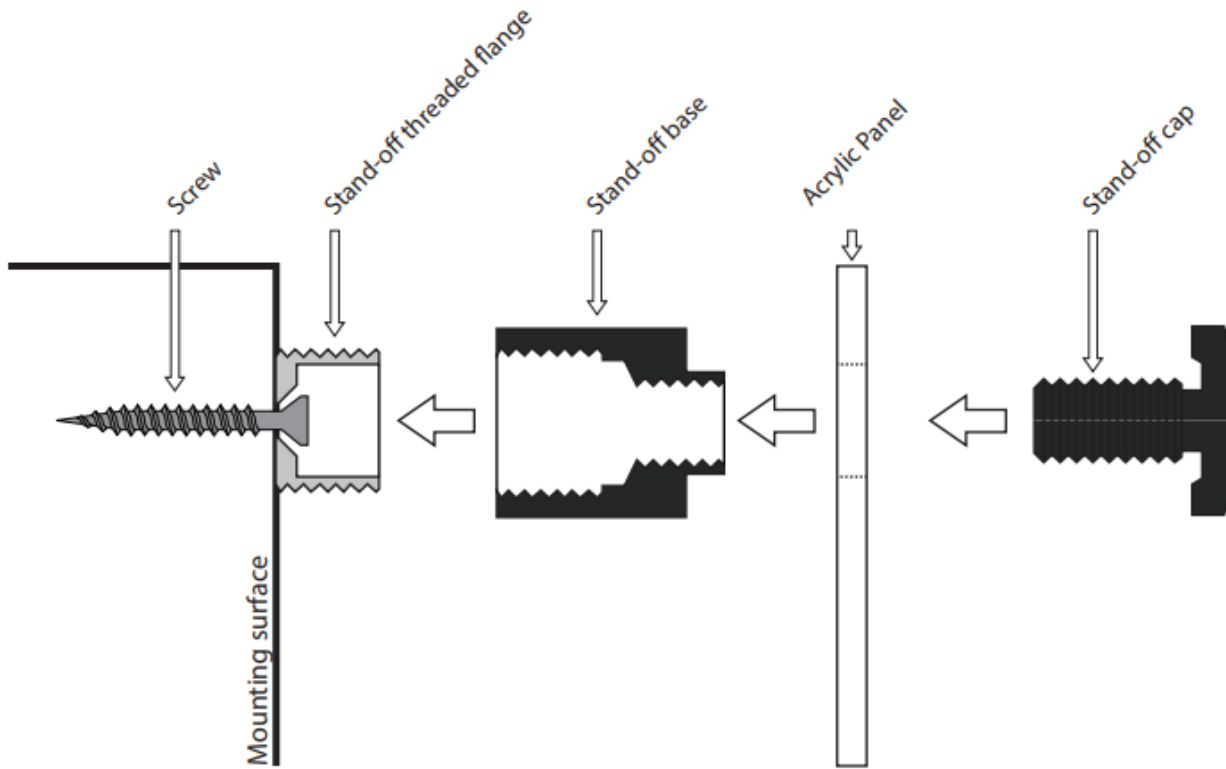

If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.