

LED Display Case Tower with Locking Door & Storage Cabinet - Black, Silver

Assembly Instructions

SKU: SCTWRLEDB, SCTLD2078,
SCTWRLD24, SCTWRLEDS, SCTWRLD2S

Scan the QR code
to visit the product
page.



Before Assembly

SAFETY INFORMATION

- **CAUTION!** Contains glass parts! Check for broken glass before assembly. Use precautions to avoid breakage when handling glass parts.
- **CAUTION!** Display and parts may be heavy. Two persons are required for assembly.
- **Do not exceed the individual weight capacity of each glass shelf.**
 - 18", 20" Widths: 44lbs
 - 24" Width: 55lbs

COMPONENTS

PART	QUANTITY
A: Front Panel (Glass Door)	1
B: Side Panel	Left x1, Right x1
C: Back Panel (Attached Power Cord).....	1
D: Glass Shelf.....	3
E: Cabinet Bottom Panel.....	1
F: Showcase Bottom Panel	1
G: Lighting Panel.....	1
H: Lighting Panel Ventilated Cover	1
I: Key Set.....	1
J: Hex Wrench.....	1

Before assembly, check that two cartons (one small and one long) were received.

**NOTE:** Philips head screwdriver is required for assembly.

Assembly

1. Check all components before beginning the assembly. To prevent damage during assembly, prepare a soft surface with the packing materials or a blanket.



2. Place the Back Panel (with attached power cord) on the prepared surface with the pre-installed hardware facing up.
3. Remove all floor levelers from panels with a screwdriver.

Tip: For easiest assembly, review the location of the shelf supports and adjust shelf height before connecting the sides of the display case.

4. Slide the Side Panels one at a time into the channels of the Back Panel. Make sure the pre-installed panel hardware faces the inside of the unit.

! **NOTE:** All panels are inserted into channels from the bottom of the display!



5. Tighten the set screws with the hex wrench to secure the panels.



6. Orient the Front Panel (with glass door) so the lock faces outward. Slide into the channels of the Side Panels.



7. Tighten the set screws with the hex wrench to secure the Front Panel.

8. Replace all floor levelers.
9. Carefully lift the display case to standing (2 people required).




10. Unlock the storage cabinet and place the Cabinet Bottom Panel.

11. Unlock the display case cabinet and place the Showcase Bottom Panel.



(Assembled Unit Pictured Above)

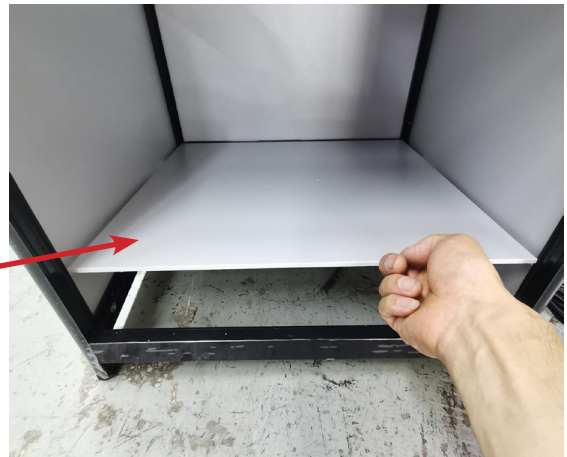

12. Insert the Lighting Panel by tilting it into the display case and lifting up to the top of the unit.




13. Orient the panel and connect both panel wires (see picture).

! NOTE: Repetitive insertion of the Lighting Panel may slightly chip the laminate covering. These damages are small and are hidden once the panel is in place.



14. Install the Lighting Panel Ventilated Cover, aligning the 3 cutouts with the light bulbs to ensure safe heat ventilation. The warning label should face the Front Panel.

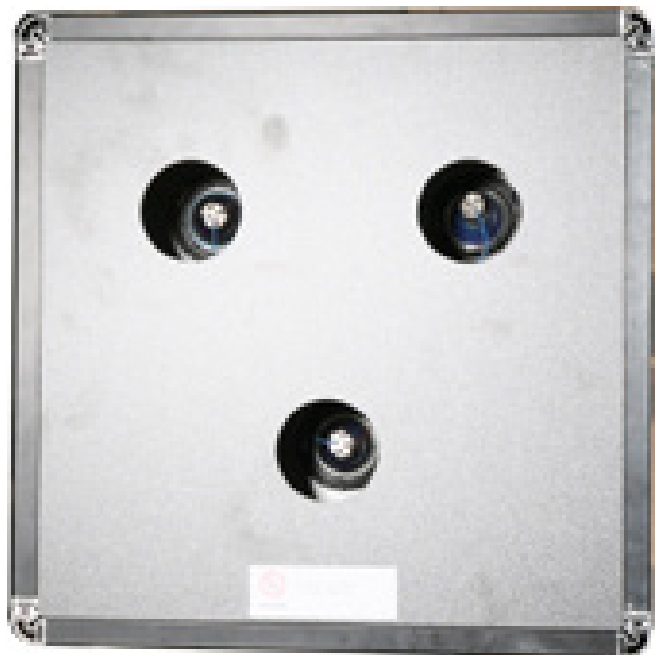

15. Carefully insert each glass shelf so it rests securely on the rubber bumper of the shelf brackets.
16. Use a screwdriver to adjust the shelf brackets as necessary until the shelves are stable and level.



Assembly is
complete.



If you have any questions regarding our products, please visit us at www.displays2go.com or contact Displays2go customer service at 844-221-3388.