Vector Frame Kit 10

VF-K-10

The innovative, contemporary and clean appearance of the Vector Frame™ line of exhibit kits will captivate your audience. Kits feature push-fit fabric graphics, easy-to-assemble extrusion frames, accent lighting, tables, counters, literature accessories, monitor mounts and interior LED edge lighting where indicated.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:


- 50mm silver extrusion frame
 Single-sided SEG dye-sublimated fabric graphics
 Counter available in four thermoform
- finishes, shown below

- Kit includes frame, five fabric graphics, four rigid graphic accent wings, two 120 watt lights, one counter and two wheeled molded cases
- Lifetime hardware warranty against manufacturer defects

dimensions:

| Graphic Refer to related graphic templates for more information |
|---|
| |
| Visit: www.exhibitors-handbook.com/ graphic-templates |
| |
| |
| |
| |
| |

additional information:



Tabletop color options:





Lights Included: Lumina 200 120 watt floodlight, curved arm, black finish,19.5" from end to end


Counter holds max weight = 20 lbs / 9 kgs

Parts Included:

| Code | Qty | Description |
|----------------------------|-----|--|
| VF-K-10-A-G | x1 | 210MM (8.26")W X 1150MM (45.27")H PVC GRAPHIC |
| VF-K-10-B-G | x1 | 210MM (8.26")W X 1150MM (45.27")H PVC GRAPHIC |
| VF-K-10-C-G | x1 | 2550MM (100.4")W X 2400MM (94.5")H FABRIC GRAPHIC W/FCE-2 ALL SIDES |
| VF-K-10-D-G | x1 | 210MM (8.26")W X 1150MM (45.27")H PVC GRAPHIC |
| VF-K-10-E-G | x1 | 210MM (8.26")W X 1150MM (45.27")H PVC GRAPHIC |
| F34 | x4 | 1155MM (45.47") PHFC2 EXTRUSION - WITH IB2 HOLE ONE SIDE - WITH LOCK ONE END |
| F49 | x4 | 8R PHFC2 EXTRUSION WITH LOCK ONE SIDE - WITH IB2 LOCK HOLES ONE SIDE |
| SW-FOOT | x2 | VECTOR FRAME SUPPORT FOOT |
| IB2 | x5 | PH INLINE CONNECTOR |
| CB9-S | x2 | 50MM SQUARE PHCF2 CORNER BRACKET |
| CB9-R | x2 | 50MM ROUND PHCF2 CORNER BRACKET |
| VE-70 | x2 | 1155MM (45.47") PH EXTRUSION WITH IB2 HOLE ONE SIDE - WITH LOCK ONE END |
| LUM-200-ORL-B LN-3P-LT-FXT | x2 | BLACK 200W HALOGEN LIGHT FIXTURE ETL APPROVED |
| PANEL CLAMP | x8 | 7MM PLASTIC MOLDED PANEL CLAMP |

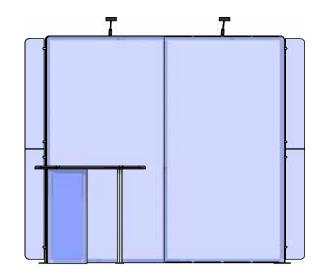


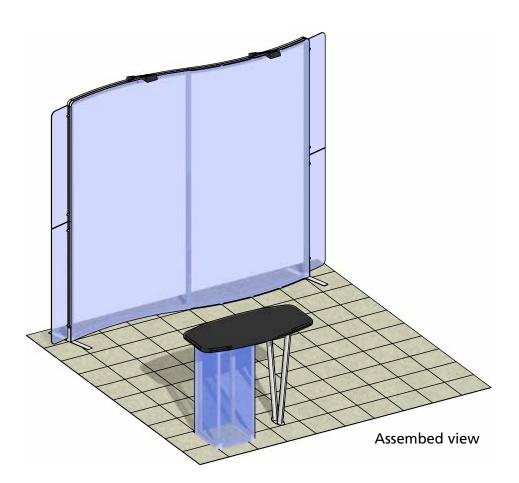


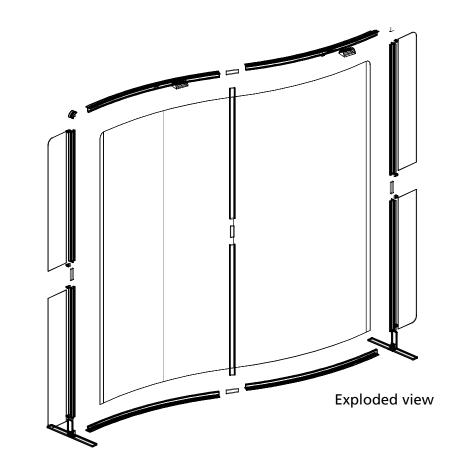

Step 1: Assemble Frame


Arrange pieces on the floor as shown in the diagram below. Assemble frame by securing CB9-R's on the top and CB9-S's on the bottom to the F49s and F34s. When locking be sure to turn each cam a little bit and then go back and tighten to the proper tension. Take care to turn locks only half a turn. Slide the IB2 into the extrusion to connect sides. Tighten to the proper tension to lock extrusions together.

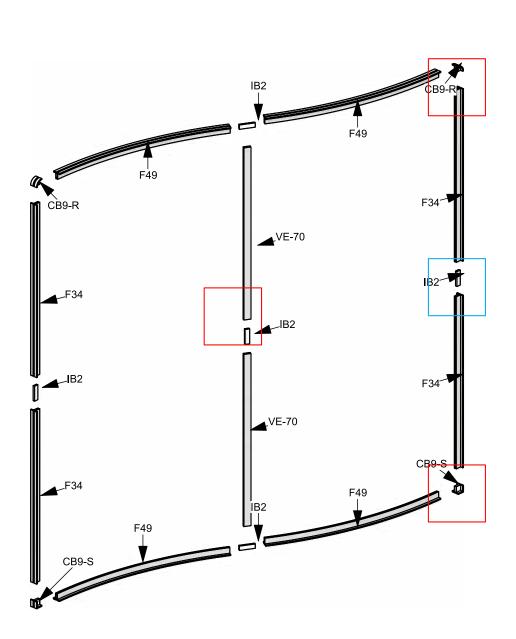

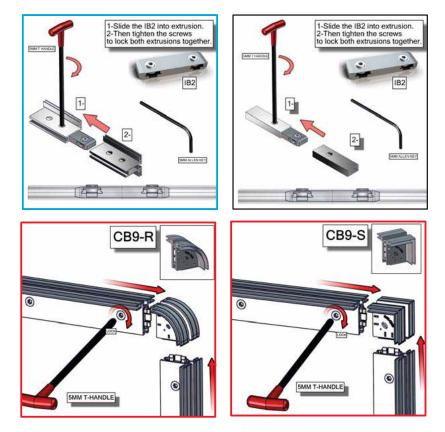


Step 2: Apply Graphics & Attach Feet

Apply graphic(s) by pressing the FCE-2 edge of graphic into the channel of the extrusion. Start in upper left corner, go across the top and then down the sides to the bottom. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. To adhere foot to frame, loosen thumbscrews from foot. Slide extrusion into LN-100 groove. Tighten to the proper tension to secure supporting feet.

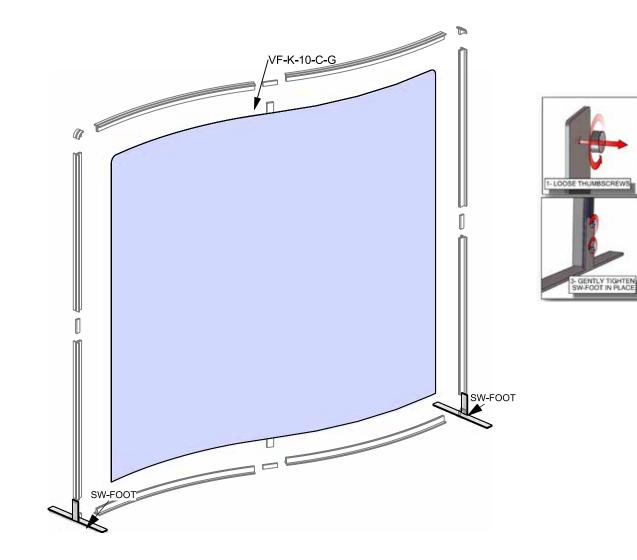




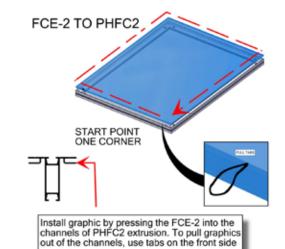


Step 3: Attach Accent Wings & Lights

To attach accent wings, screw panel clamp clockwise, into the channel until it is tight. Loosen the thumbscrew. Place rigid sintra graphics into place and tighten thumbscrew to secure. Overtightening can strip thumbscrew and damage graphic. Slide light clip onto each light. Then slide light into the extrusion channel at an angle and gently lower down and repeat for each light.

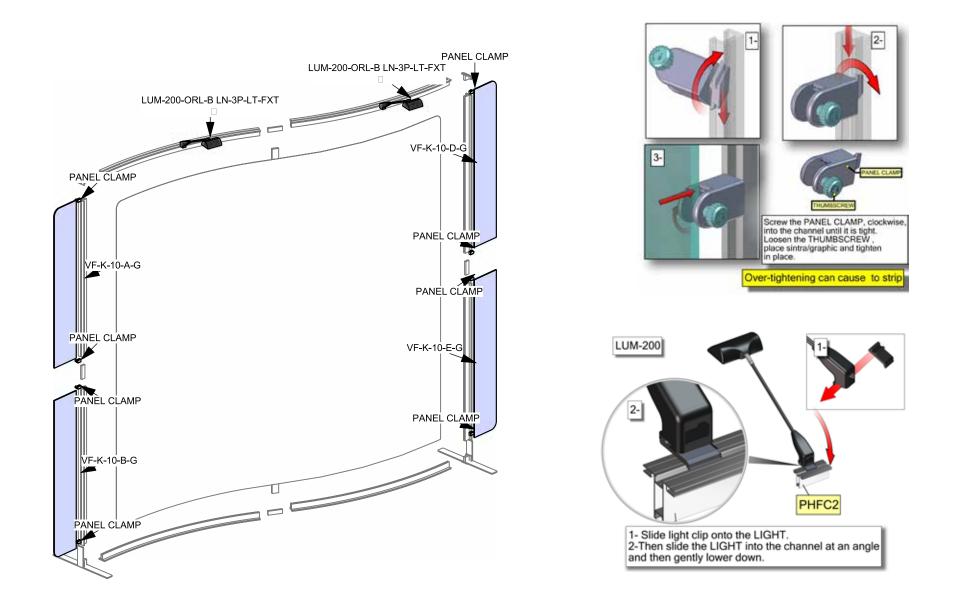


Parts Included:

| Code | Qty | Description |
|--------------|-----|--|
| VFC-07-A-G | x1 | 1178MM (46.37")W X 1000MM (39.38")H FABRIC GRAPHIC W/FCE-2 ALL SIDES |
| VFC-07-B-G | x1 | 400MM (15.75")W X 1000MM (39.38")H FABRIC GRAPHIC W/FCE-2 ALL SIDES |
| TUBE-30-910 | x2 | 910MM X 30MM TUBE WITH ES30 HOLES BOTH ENDS |
| CB10-R | x4 | 50MM ROUND PHCF2 CORNER BRACKET |
| F24 | x2 | 986MM (38.32") PMFC2-90 EXTRUSION - WITH IB2 LOCK HOLES BOTH SIDES |
| F43 | x6 | 300MM (11.81") PHFC2 EXTRUSION WITH LOCKS TWO ENDS |
| V-LG-02 | x1 | 1005MM X 450MM (39.5625" X 17 .72") V LEG 50MM CHANNEL TUBE |
| VFC-07-CT | x1 | COUNTERTOP FOR VECTOR FRAME COUNTER VFC-07 |
| PMFC2-90-CAP | x4 | PMFC2 90 DEGREE EXTRUSION CAP |




Overhead view

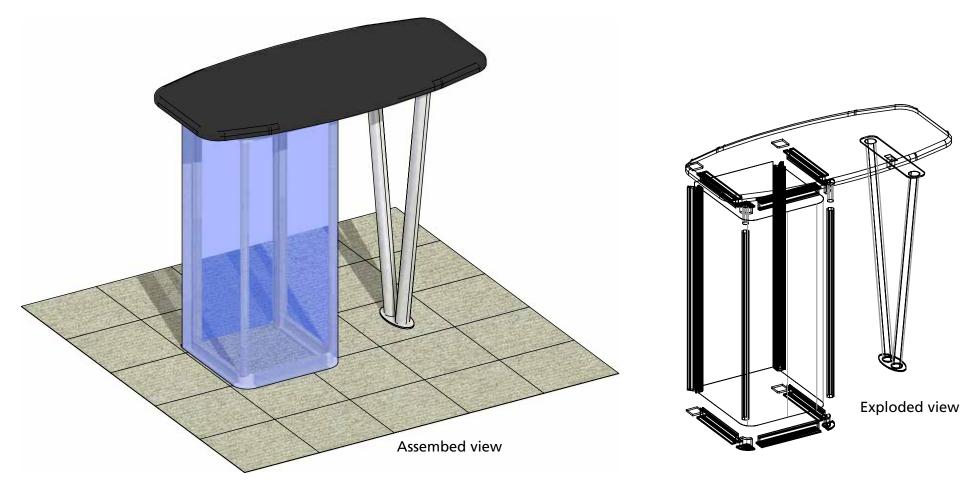



Step 1: Assemble Counter Frame

Arrange pieces on the floor as shown in the diagram below. Assemble frame sides by securing CB10-R to F43 and TUBE-30-910. Continue frame assembly by locking F48s, F54s and F24s to extrusion. When locking be sure to turn each cam a little bit and then go back and tighten to the proper tension. Take care to turn locks only a quarter turn, so as to not strip the locks by over tightening.



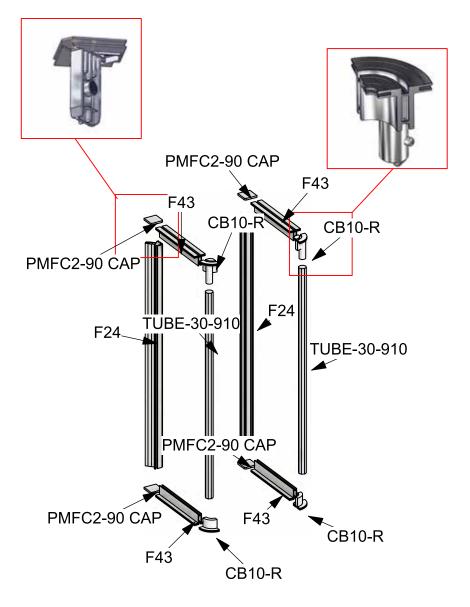

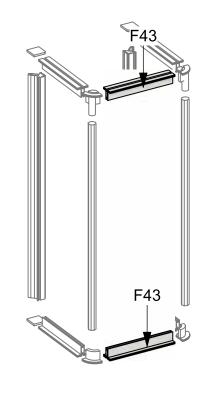

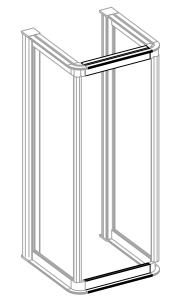

Step 2: Apply Graphics & Attach Countertop

Apply push-fit fabric graphic(s) by pressing the FCE-2 edge of graphic into the channel of the extrusion. Start in upper left corner, go across the top and then down the sides to the bottom. Repeat for each side. Assure each graphic is tightly inserted. When taking graphics off, take care to gently pull by attached pull tab. To secure countertop, first place leg in the proper orientation. Insert the thumb connector into the bottom of the countertop and make a 1/4 turn clockwise to tighten in place.

