

FLOOR DISPLAY ASSEMBLY INSTRUCTIONS

CAUTION! Display contains glass parts! Check for broken glass before assembly. Use precautions to avoid breakage when handling glass parts.

CHECK PARTS

- 1) Before assembly, be sure that two cartons (one small and one long) were received.


Note: Philips head screwdriver is required for assembly.

ASSEMBLE DISPLAY PANELS

CAUTION! Display and parts may be heavy. Two persons are required for assembly.

Note: To prevent damage, display should be assembled on a pad or blanket placed on the floor. Display packing materials may be used for this purpose.



- 1) Place the rear panel of the display flat on the floor with correct panel facing downward.
- 2) Align the left side panel, so that the no screw side faces outward and away from you. Slide the left side panel into the groove of the rear panel as shown. (Be sure that panels are parallel to each other for ease of assembly.)

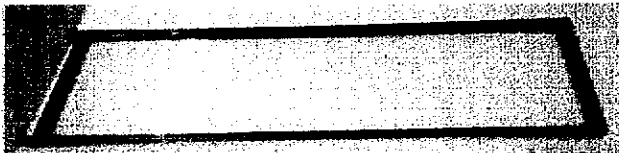


Note: All panels will be assembled from the bottom of the display.




- 3) Align the right side panel so that the no screw side faces outward and away from you. Slide the right side panel into the groove of the rear panel as shown.

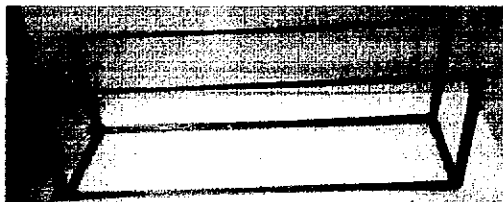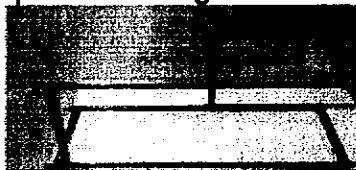


- 4) Align the front panel (with glass door) so that the door lock faces outward and is closest to you. Slide the front panel into the grooves of the left and right side panels as shown.

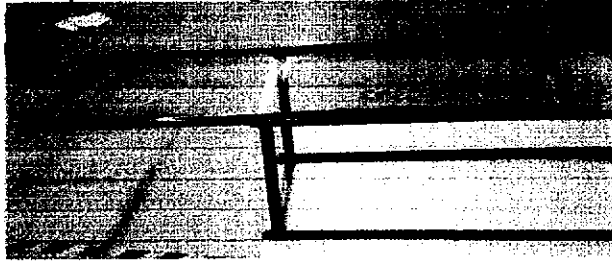

- 5) Align the bottom panel on the bottom.

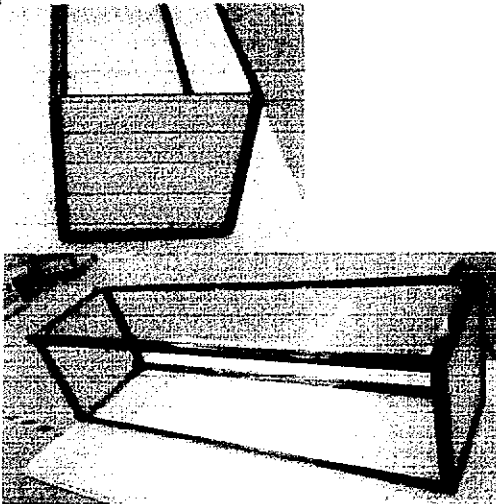

- 6) Locking screw on bottom 4 points by using tool.

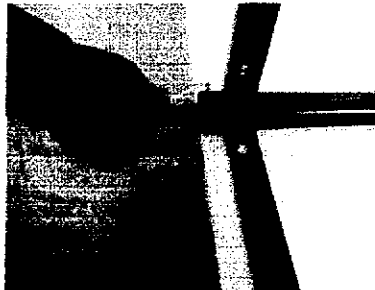


- 7). Keep the cabinet door being closed. Carefully stand display
8) Carefully insert each glass shelf so that it is seated securely on rubber bumper of shelf brackets. Adjust shelf brackets as necessary to ensure that shelves are stable and level.

NOTE: ADJUST THE SHELF SUPPORT


Be sure shelf brackets are adjustable so 3 glass shelves will be in desired position (allow enough room between shelf brackets to fit shelves into place). Be sure rubber bumper of each shelf bracket faces upward, and tighten all shelf bracket adjustment screws securely.





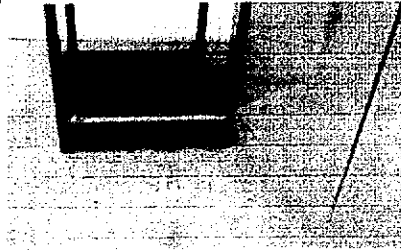

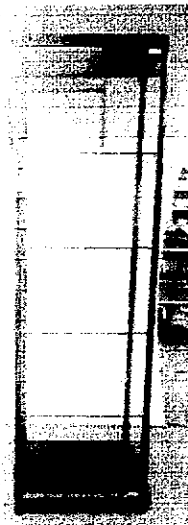

9). Install the bottom panel



10)The display assembled



Below is part list:

name	picture	specification	number
wrench			1
allen key			1
phillips screw driver			1
slot screw driver			1
key			1
Sucker			13